

4-Port DisplayPort KVM Switch, 8K 60Hz / 4K 144Hz, Single Display, DP 1.4, 2x USB 3.0 Ports, 4x USB 2.0 HID Ports, Push-Button & Hotkey Switching, TAA Compliant - OS Independent, Metal Housing

Product ID: D86A2-4-PORT-8K-KVM



Share and switch between four USB-A and DisplayPort-enabled computers, using this DisplayPort KVM Switch. Share an 8K 60Hz DisplayPort monitor, a keyboard and mouse, two USB 5Gbps devices, and two additional USB 2.0 devices.

This KVM supports resolutions up to 8K 60Hz or 4K 144Hz/120Hz. Daisy chain additional monitors via MST pass-through. The KVM supports ultrawide resolutions of up to 5120x1440 at 60Hz. Ideal for applications such as CAD/CAM, video editing, and content creation. Support for High Dynamic Range (HDR) offers increased contrast, brightness, colors, and greater luminosity.


This Universal KVM Switch provides various switching options, including hotkey or push-button switching. Hotkeys allow for independent switching of audio and video, enabling audio playback from one computer while controlling another. An audible buzzer confirms hotkey input, and LEDs provide a visual status of the selected host.

The TAA-Compliant KVM Switch offers universal compatibility, working with all operating systems, including Windows, macOS, ChromeOS, and Linux. It is also compatible with all hardware platforms, including Intel and AMD.

The durable metal housing helps prevent Electro-magnetic Interference (EMI). Overcurrent Protection (OCP) ensures peripherals don't overdraw power, reducing the occurrence of device dropouts or shutdowns.

If you'd like to mount this KVM switch to your server rack, we offer a SV431RACK (sold separately) that turns this KVM into a rackmountable KVM.

Certifications, Reports and Compatibility

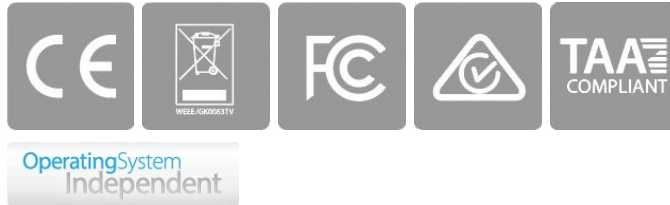

Applications

- Share a monitor, mouse, keyboard, and audio peripheral between four desktop computers
- Great for applications like CAD/CAM, video editing, and content creation

Features

- **8K 60HZ WITH HDR:** Fast switch between four USB-A and DisplayPort-enabled desktops to share a keyboard, mouse, audio device, and a single 8K 60Hz DisplayPort monitor; DSC support required for maximum video performance; Supports MST Pass-through
- **UNIVERSAL COMPATIBILITY:** TAA-Compliant KVM Switch works with any operating system including Windows, macOS, ChromeOS, and Linux; Compatible with all hardware platforms such as Intel and AMD; Supports ultrawide resolutions up to 5120x1440 60Hz
- **MULTIPLE SWITCHING OPTIONS:** Fast Switching via push-buttons or hotkeys with an audible buzzer providing confirmation; LEDs provide quick visual port selection status; Listen to audio from one computer while controlling another
- **THOUGHTFUL DESIGN:** Metal housing is durable and helps prevent Electro-magnetic Interference (EMI); Overcurrent Protection (OCP) prevents peripherals from overdrawing power, reducing the risk of damage to the KVM and attached USB devices
- **TECHNICAL SPECIFICATIONS:** KVM Switch is DisplayPort 1.4 compliant, supporting resolutions up to 8K 60Hz or 4K 144Hz, HDR10, HDCP 2.2/1.4, and DSC; Supports DisplayPort Audio and 3.5mm analog audio; USB 5Gbps Hub Ports; OS Independent

General

UPC	065030893206
Package Quantity	1
Warranty	2 Years

Special Notes / Requirements

System and Cable Requirements	A host that supports DisplayPort 1.4 and DSC is required for maximum performance
-------------------------------	--

Power

Power Source	AC Adapter Included
Input Voltage	100 - 240 AC
Input Current	1.0A
Output Voltage	12V DC
Output Current	3
Center Tip Polarity	Positive
Plug Type	M
Power Consumption	36W

Physical & Environmental

Color	Black
Material	Steel
Product Length	8.7 in [220.0 mm]
Product Width	5.1 in [130.0 mm]
Product Height	1.7 in [44.0 mm]
Weight of Product	36.6 oz [1038.0 g]
Operating Temperature	0C to 40C (32F to 104F)
Storage Temperature	-20C to 60C (-4F to 140F)
Humidity	0% ~ 85% RH (non-condensing)

Performance

Maximum Data Transfer Rate	5Gbps
IP Control	No
Hot-Key Selection	Yes
Port Selection Support	Push Button and Hotkeys
On-Screen Display	No
Auto Scan	3, 8, 15 & 30 seconds

MTBF	130,000 Hours
Audio Specifications	DisplayPort - 2 Channel Audio
	Analog Stereo - 2 Channel Audio
Maximum Digital Resolutions	7680 x 4320 @ 60Hz
Video Revision	DisplayPort 1.4
Wide Screen Supported	Yes

Hardware

CAC Support	No
Audio	Yes
Number of KVM Ports	4
Supported Platforms	USB 3.2 Gen 1 (5Gbps)
PC Video Type	DisplayPort
Number of Monitors Supported	1
Rack-Mountable	No
Cables Included	No
Chipset ID	GL-3523
Cascadable	No
LED Indicators	4 - Solid Green: PC connected (power on)
	1 - Solid Red: PC selected (power on)

Packaging & In-the-Box

Included in Package	1 - KVM Switch
	1 - Quick-Start Guide
	1 - Universal Power Adapter (NA/JP, EU, UK, NZ)
	4 - Rubber Feet
Package Width	9.6 in [245 mm]

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Interface Modules](#) category:

Click to view products by [Startech](#) manufacturer:

Other Similar products are found below :

[9441560000](#) [73-546-001](#) [ADAM-4541-C](#) [USB-CARD-READER](#) [USB-RS485](#) [USB-SATA](#) [TD501D232H](#) [RSM232D](#) [TD502D232H](#) [RS232](#)
[TO RS485](#) [TD302D232H](#) [TD501D232H](#) [RSM232](#) [RSM232D](#) [TD301D232H](#) [TD302D232H](#) [TD502D232H](#) [SAVAK-58](#) [SAVKABELCL-24](#)
[20270](#) [20294](#) [30255](#) [50260](#) [20295](#) [20277](#) [50261](#) [EUR0001H](#) [ZHB2301G](#) [30346](#) [KS-308A](#) [KS-302A](#) [KS-304A](#) [KS-1041UA](#) [KS-1021UA](#)
[CEHBB](#) [66255](#) [50985](#) [4000-68512-0940003](#) [GPS50M](#) [2200002208](#) [4000-68112-1220000](#) [44110](#) [4000-68000-1300000](#) [4000-68512-4040001](#)
[446139](#) [60004-006](#) [2200002207](#) [1020882](#) [1021056](#) [1021058](#)