

USB-C USB-A Dock - Hybrid Universal USB 3.0 Docking Station for USB-C or USB-A Laptop - Dual Monitor 4K 60Hz HDMI/DisplayPort - 6x USB-A, GbE - USB 5Gbps - Windows/Mac

Product ID: DK30A2DHU



Transition from the legacy USB-A (USB 3.1/3.0) to newer USB-C laptops with this universal laptop docking station for USB-C and USB-A laptops. The USB 3.1 Gen 1 (5 Gbps) Type-C dock features dual HDMI and/or DisplayPort monitors, six USB Type-A downstream peripheral ports, and headset audio.

This is a dual 4K60Hz video docking station with support for both Ultra HD DisplayPort and/or HDMI monitors that lets you configure your video connections to best suit your needs.

Dual 4K DisplayPort Up to 4096 x 2160p @ 60Hz

Dual 4K HDMI Up to 4096 x 2160p @ 60Hz

Single 4K DisplayPort + Single 4K HDMI Up to 4096 x 2160p @ 60Hz

Single 5K DisplayPort* Up to 5120 x 2880

*Requires monitor support for 5K using two DP ports

This docking station is fully certified to meet top industry standards for DisplayLink (video connections) certification to guarantee the highest quality, performance, and compatibility.

For fast setup right out of the box, the two included host cables (USB-C and USB-A) connect to any laptop. The included dock stand lets you position the dock vertically to save space or lay flat on the desk.

Connect your devices with six downstream USB Type-A (USB 3.0 5 Gbps) ports, two positioned on the front, and four on the back. The dock provides a GbE port and a 3.5 mm 4-position headset audio jack.

Developed to improve performance and security, StarTech.com Connectivity Tools is the only software suite on the market that works with a wide range of IT connectivity accessories. The software suite includes:

Advanced Windows Layout Utility: To setup and save custom windows layouts.

Mac Address Pass-Through Utility: To improve network security.


USB Event Monitoring Utility: To track and log connected USB devices

Wi-Fi Auto Switch Utility: Enabling users to quickly access faster network speeds via wired LAN.

For more information and to download the StarTech.com Connectivity Tools application, please visit:
www.StarTech.com/Connectivity-Tools

StarTech.com conducts thorough compatibility and performance testing on all our products to ensure we are meeting or exceeding industry standards and providing high-quality products to IT Professionals. Our local StarTech.com Technical Advisors have broad product expertise and work directly with our StarTech.com Engineers to provide support for our customers both pre and post-sales.

Certifications, Reports and Compatibility

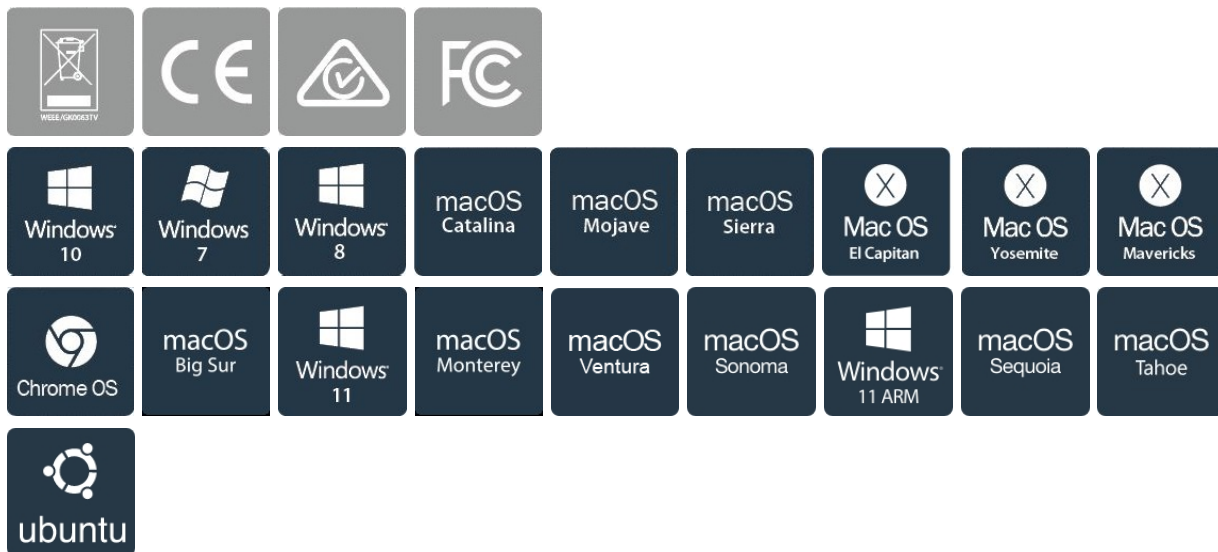

Applications

Features

- **DUAL 4K 60Hz HYBRID USB-C & USB-A DOCK:** Universal USB 3.0 docking station (5Gbps) works with USB-C & USB-A laptops/computers and features 6-Port USB Type-A hub, Gigabit Ethernet, and 3.5mm audio jacks; NOTE: This dock does not support USB-C Power Delivery
- **FLEXIBLE DUAL MONITOR VIDEO:** This 4K 60Hz USB-C or USB-A docking station can connect up to 2 monitors: Dual DisplayPort or Dual HDMI or DP + HDMI displays; Supports dual extended displays on MacBooks with both the Intel processor or Apple M1/M2 chip
- **6 DOWNSTREAM USB-A PORTS:** Hybrid USB C dock has a 6-port USB 3.2 Gen 1 (5Gbps) hub w/ extra USB-A ports to support devices such as keyboard, mouse, flash drive, external hard drive & printer

- **COMPATIBILITY:** DisplayLink Certified port replicator for maximum performance & compatibility w/Dell, HP, Lenovo & MacBook PCs on Windows, ChromeOS & macOS platforms; Includes USB-C & USB-A host cables; Ideal for offices where mixed laptop brands are used

- **CONNECTIVITY TOOLS:** Provided with this device, the application improves performance and security, featuring MAC Address Changer, USB Event Monitoring, Windows Layout & Wi-Fi Auto Switch utilities

General

UPC	065030891349
Package Quantity	1
Warranty	3 Years

Special Notes / Requirements

Special Notes	DisplayLink docking stations and video adapters support more than one external display on Apple's M1-based Mac. Requires driver installation. Please contact StarTech.com support for a recommendation based on your specific setup.
---------------	--

Power

Power Source	AC Adapter Included
Power Delivery	No PD
Input Voltage	110V-240V AC
Input Current	1.0A
Output Voltage	20V DC
Output Current	2
Plug Type	N
Power Consumption	40W

Physical & Environmental

Color	Black & Gray
Material	Aluminum and Plastic
Cable Length	39.4 in [1000 mm]
Product Length	5.2 in [133.0 mm]
Product Width	2.9 in [73.0 mm]

Product Height	7.4 in [187.0 mm]
Weight of Product	12.2 oz [347.0 g]
Operating Temperature	0 to 50C
Storage Temperature	-20 to 70C
Humidity	0% to 95% (non-condensing) at 25C

Performance

Compatible Networks	10/100/1000 Mbps
Wake-On-LAN (WOL)	Yes
General Specifications	Wake-on-LAN (WoL): Yes
MTBF	26 280 hrs
Maximum Digital Resolutions	4K 60Hz

Hardware

Fast-Charge Port(s)	No
4K Support	Yes
Displays Supported	2
Number of Ports	8
Audio	Yes
Interface	USB 3.2 Gen 1
Bus Type	USB-C
USB Pass-Through	Yes
Number of Displays	2
Chipset ID	DisplayLink - DL-6950 VIA/VLI - VL813 Realtek RTS5411 or RTS5411E

Packaging & In-the-Box

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Interface Modules](#) category:

Click to view products by [Startech](#) manufacturer:

Other Similar products are found below :

[9441560000](#) [73-546-001](#) [ADAM-4541-C](#) [USB-CARD-READER](#) [USB-RS485](#) [USB-SATA](#) [TD501D232H](#) [RSM232D](#) [TD502D232H](#) [RS232](#)
[TO RS485](#) [TD302D232H](#) [TD501D232H](#) [RSM232](#) [RSM232D](#) [TD301D232H](#) [TD302D232H](#) [TD502D232H](#) [SAVAK-58](#) [SAVKABELCL-24](#)
[20270](#) [20294](#) [30255](#) [50260](#) [20295](#) [20277](#) [50261](#) [EUR0001H](#) [ZHB2301G](#) [30346](#) [KS-308A](#) [KS-302A](#) [KS-304A](#) [KS-1041UA](#) [KS-1021UA](#)
[CEHBB](#) [66255](#) [50985](#) [4000-68512-0940003](#) [GPS50M](#) [2200002208](#) [4000-68112-1220000](#) [44110](#) [4000-68000-1300000](#) [4000-68512-4040001](#)
[446139](#) [60004-006](#) [2200002207](#) [1020882](#) [1021056](#) [1021058](#)