

PCI Express to 4 Slot PCI Expansion System - TAA

Product ID: PEX2PCI4




StarTech.com's innovative PCI Express to PCI Expansion Chassis provides a quick and simple solution to I/O expandability on almost any PCI Express (PCIe) enabled system. Adding external PCI slots to a server/workstation or laptop, this cost-effective and time-saving method of simply adding additional PCI cards to a server/workstation or providing a platform to be able to swap PCI add-in cards between a mobile and desktop setup is the optimal method of maximizing the I/O capabilities of new or existing systems.

The external expansion chassis adds four PCI slots (32-bit/33MHz) to the host computer system, through a single PCI Express connection. Providing total bandwidth of up to 250Mbps from the x1 PCIe host controller card, which allows the host computer to function as though the cards in the expansion chassis were connected directly to the motherboard. The PCIe controller card connects directly to the PCI Expansion box with an included DVI cable for a reliable, high quality connection.

A dependable I/O expansion solution, the Expansion Chassis is backed by StarTech.com's 2-year warranty and free lifetime technical support.

Certifications, Reports and Compatibility

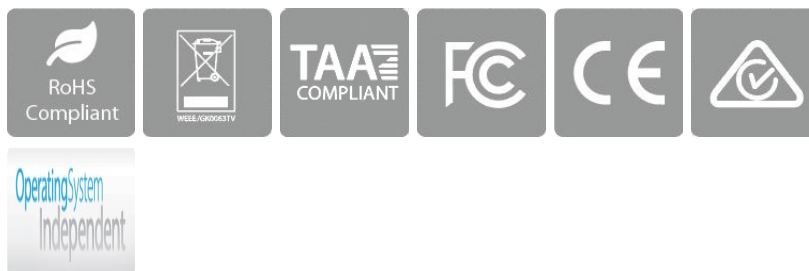

Applications

- Expand an existing system's I/O capabilities without having to purchase an entirely new system.
- Ideal for system testers, and engineers who may need to regularly swap out I/O cards.
- Add full height cards to a small form factor system.
- Provide PCI support to systems with only PCIe slots.
- Provide data acquisition, telephony, storage and audio capabilities by having additional I/O expansion slots.

Features

- Add an additional 4 PCI slots (32-bit/33 MHz), using PCI Express
- Rugged steel construction
- Supports both 5V and 3.3V & 5V add-in PCI cards
- Self-powered Expansion box with an on/off button
- No driver or software installation
- PCI Express adapter card includes both Full/Low Profile installation brackets and a DVI cable to connect the card to the PCI enclosure

Hardware

Warranty	2 Years
Interface	PCI Express
Bus Type	PCI Express

Performance

MTBF	143,947 Hours
------	---------------

Connector(s)

Connector Type(s)	1 - PCI Express x1
External Ports	4 - PCI / PCI-X (Universal 3.3 & 5V, 32-bit) Slot

Software

OS Compatibility	OS Independent; No additional drivers or software required
------------------	--

Special Notes / Requirements

Note	- Supports 32-bit PCI cards less than 6.7" in length; 64-bit PCI 12.28" cards (full-length) are not supported
------	---

- The chassis provides up to 5V @ 3A, 3.3V @ 4.5A, or a combined total of 15 Watts

- This product has a known compatibility issue with Silicon Image SATA Controllers on an AMD platform

Power

Power Source	AC Adapter Included
Input Voltage	100 - 240 AC
Output Voltage	12V DC
Output Current	3A
Plug Type	M
Power Consumption (In Watts)	36

Environmental

Operating Temperature	0C ~ 55C
Storage Temperature	-40C ~ 75C

Physical Characteristics

Color	Black
Material	Aluminum and Steel
Product Length	8.0 in [20.4 cm]
Product Width	5.4 in [13.7 cm]
Product Height	5.6 in [14.2 cm]
Weight of Product	3.3 lb [1.5 kg]

Packaging Information

Package Quantity	1
Package Length	9.8 in [25.0 cm]
Package Width	7.9 in [20.0 cm]
Package Height	9.4 in [24.0 cm]

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Interface Development Tools](#) **category:**

Click to view products by [Startech](#) **manufacturer:**

Other Similar products are found below :

[XR33052IDEVB](#) [XR21B1424IV64-0A-EVB](#) [P0551](#) [5346](#) [4901](#) [LIME2-SHIELD](#) [USB TO TTL](#) [USB TO RS485](#) [PL2303 USB UART Board \(type A\) V2](#) [USB-CAN-A](#) [MIKROE-5492](#) [5964](#) [TJA1145A-EVB](#) [2200002205](#) [Si86P541-KIT](#) [MXL86211C-EVK-1](#) [KIT6X02AP2T1](#) [MXL86112C-EVK-1](#) [103030295](#) [MIKROE-2335](#) [KIT_MINIWIGGLER_3_USB](#) [KITXMC4XCOMETH001TOBO1](#) [SI871XSOIC8-KIT](#) [1764](#) [1833](#) [1862](#) [EVALISO1I811TTBO1](#) [EVB81107-A1](#) [EVB-USB82514](#) [ATAB663231A-V1.2](#) [2264](#) [PS09-EVA-KIT](#) [BOB-13263](#) [BP359C](#) [ORG4572-R01-UAR](#) [XR21B1420IL28-0A-EVB](#) [28030](#) [MIKROE-2750](#) [292](#) [DFR0065](#) [DFR0077](#) [DFR0504](#) [TEL0010](#) [TEL0038](#) [TEL0070](#) [ASI4UEVBV2P1](#) [MIKROE-2517](#) [MM930Mini](#) [PCI-7841](#) [BOB-13830](#)