


2-Port PCI Express Serial Card with 16C1050 UART - RS232 - TAA

Product ID: PEX2S1050

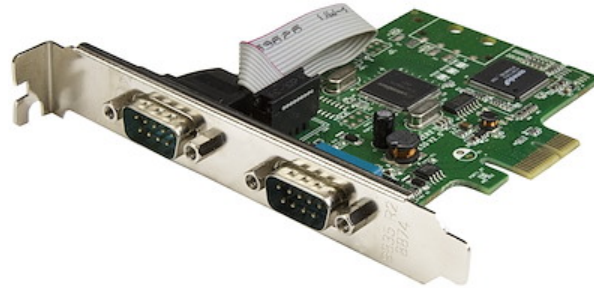

This PCI Express serial card adds two high-performance RS232 serial ports to your desktop computer or server, for connecting your serial-based devices and equipment.

The PCIe serial card can be installed into an available PCI Express slot, to provide two high-performance 16C1050 RS232 serial UART channels/ports. It offers a convenient solution for connecting modern or legacy equipment to newer computer systems that don't have RS232 ports. The serial card is compliant with PCI Express 1.0a specification, and it's compatible with 1x, 2x, 4x, 8x and 16x PCI Express slots.

The 2-port PCIe serial card is ideal for system upgrades in a wide range of applications including manufacturing equipment, POS equipment, security devices such as surveillance cameras, card readers or access panels, and environment or building control systems.

The PCIe serial card delivers high-performance serial communication, with support for data transfer rates of up to 460Kbps. The serial card provides CPU load decrease which helps ensure optimal system performance and prevent errors such as overruns by preserving resources. In addition, the dual-channel UART ensures smooth performance, even while both ports are in use.

The serial card is easy to install and configure, with support for a broad range of Windows operating systems. Plus, the card features IRQ sharing and supports plug-and-play serial device connections, guaranteeing convenient, hassle-free installation. It comes with a standard-profile bracket installed, and also includes an optional low-profile bracket.

The PEX2S1050 is backed by a 2-year lifetime warranty and free lifetime technical support.

Certifications, Reports and Compatibility





Applications

- Manufacturing (CNC machinery, process control equipment, bar code scanners, serial printers)
- POS (credit/debit card readers, receipt printers, bar code scanners, cash registers, scales)
- Consumer (modems, PDAs, digital cameras, printers)
- Security (UPS control, access key panels, video cameras, card readers, modems)
- Casino (video lottery terminals, slot machines)
- Environmental Control (lighting, temperature, clocks)
- Healthcare (patient monitoring equipment, nurses' stations, modems)
- Hotel Front Desk (serial printers, bar code scanners, keyboard, mouse, receipt printer, credit/debit card reader)
- Hospitality/Restaurant (credit card/debit card reader, serial printers)
- ISDN Networking

Features

- Dual-channel 16C1050 UART for full compatibility with 16C1050 devices
- Maximum data transfer rate of 460Kbps
- Compliant with PCI Express 1.0a specification, compatible with 1x, 2x, 4x, 8x, and 16x PCIe bus
- 256-Byte deep FIFO per transmitter and receiver
- In-band software flow control using programmable Xon/Xoff in both directions

General

UPC	065030868297
Package Quantity	1
Warranty	2 Years

Compliance & Certifications

Microsoft WHQL Certified Yes

Power

Input Voltage	12V DC
Output Voltage	12V DC

Physical & Environmental

Color	Green
Material	Steel
Product Length	4.1 in [103 mm]
Product Width	4.7 in [120 mm]
Product Height	0.8 in [20 mm]
Weight of Product	2.2 oz [61 g]
Operating Temperature	-10C to 80C (14F to 176F)
Storage Temperature	-20C to 100C (-4F to 212F)
Humidity	5~85% RH

Performance

Data Bits	5, 6, 7, 8
FIFO	256 Bytes
Max Baud Rate	460.8 Kbps
Serial Protocol	RS-232
Full Duplex Support	Yes
MTBF	124,620 hours

Hardware

Number of Ports	2
Interface	Serial
Bus Type	PCI Express
Card Type	Standard Profile (LP bracket incl.)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Interface Development Tools](#) **category:**

Click to view products by [Startech](#) **manufacturer:**

Other Similar products are found below :

[XR33052IDEVB](#) [XR21B1424IV64-0A-EVB](#) [P0551](#) [5346](#) [4901](#) [LIME2-SHIELD](#) [USB TO TTL](#) [USB TO RS485](#) [PL2303 USB UART Board \(type A\) V2](#) [USB-CAN-A](#) [MIKROE-5492](#) [5964](#) [TJA1145A-EVB](#) [2200002205](#) [Si86P541-KIT](#) [MXL86211C-EVK-1](#) [KIT6X02AP2T1](#) [MXL86112C-EVK-1](#) [103030295](#) [MIKROE-2335](#) [KIT_MINIWIGGLER_3_USB](#) [KITXMC4XCOMETH001TOBO1](#) [SI871XSOIC8-KIT](#) [1764](#) [1833](#) [1862](#) [EVALISO1I811TTBO1](#) [EVB81107-A1](#) [EVB-USB82514](#) [ATAB663231A-V1.2](#) [2264](#) [PS09-EVA-KIT](#) [BOB-13263](#) [BP359C](#) [ORG4572-R01-UAR](#) [XR21B1420IL28-0A-EVB](#) [28030](#) [MIKROE-2750](#) [292](#) [DFR0065](#) [DFR0077](#) [DFR0504](#) [TEL0010](#) [TEL0038](#) [TEL0070](#) [ASI4UEVBV2P1](#) [MIKROE-2517](#) [MM930Mini](#) [PCI-7841](#) [BOB-13830](#)