


8-Port PCI Express RS232 Serial Adapter Card, PCIe RS232 Serial Card, 16C1050 UART, Multiport Serial DB9 Controller/Expansion Card, 15kV ESD Protection, Windows Only - TAA

Product ID: PEX8S1050

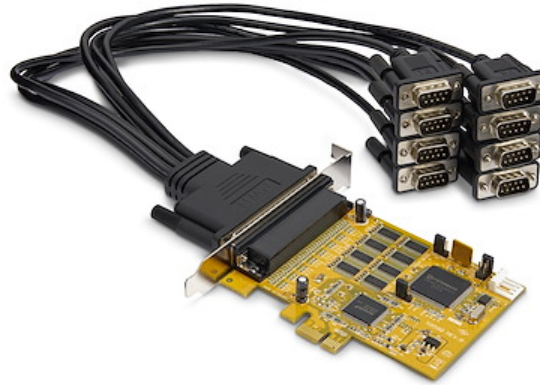


Add eight RS-232 DB9 serial ports to your desktop computer, through a PCIe expansion card slots. This PCI express serial card, with 8-port breakout cable, provides you with multiple ports to connect a wide variety of serial peripherals, at speeds of up to 921.4Kbps.

The PCI express serial port card makes it easy to add serial ports to connect your peripherals including printers, scanners, credit/debit card readers, PIN pads and modems, industrial controls and more. The 8 port PCIe serial card includes a breakout cable - with 8 DB9 connectors.

This PCI Express card is only compatible with Windows and Windows server.

Certifications, Reports and Compatibility

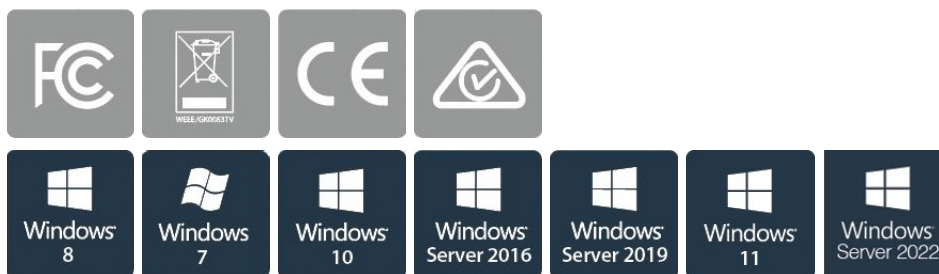

Applications

- Manufacturing (CNC machinery, process control equipment, bar code scanners, serial printers)
- POS (credit/debit card readers, receipt printers, bar code scanners, cash registers, scales)

- Consumer (modems, PDAs, digital cameras, printers)
- Security (UPS control, access key panels, video cameras, card readers, modems)
- Casino (video lottery terminals, slot machines)
- Environmental Control (lighting, temperature, clocks)
- Healthcare (patient monitoring equipment, nurses' stations, modems)
- Hotel Front Desk (serial printers, bar code scanners, keyboard, mouse, receipt printer, credit/debit card reader)
- Hospitality/Restaurant (credit card/debit card reader, serial printers)
- ISDN Networking

Features

- **8 PORT SERIAL CARD:** Serial controller card w/ 16C1050 UART based on the Systembase SB16C1058PCI, w/15kV ESD, 8x DB9 ports, bi-directional RS232 speeds up to 921.6Kbps per port & 256 byte FIFO buffer; Upgraded version of our popular card PEX8S952
- **OPTIONAL CONFIGURABLE POWER:** Multiport serial card provides 12v/5v, or none on pin 9 w/up to 3A total shared; 18"/48cm DB62 to 8x DB9 breakout cable incl; Hex nuts incl for opt screw/nut DB9 interface
- **WINDOWS ONLY:** Full profile PCI-e 1x card and fully compliant w/ PCI Express Base Specifications, Revision 1.0a/1.1; Supports Windows (incl. XP and up) and Windows Server (2003 and up); For standard profile desktop/servers
- **VERSATILE APPLICATIONS:** PCI Express RS232 serial adapter card for within point of sale terminals, PLCs, control/automation in factories, scientific sensors, medical equipment, scanners, oscilloscope
- **TECH SPECS:** System Base SB16C1058PCI Chipset; 16C1050 UART compatible; 8x 9-Pin D-Sub Ports; Max Baud 921.6Kbps per port; 256 Byte FIFO; Supports Windows Only; None, Even, or Odd Parity Modes; 5/6/7/8 Data Bits; RS-232 Protocol; Standard Profile Bracket

General

UPC	065030888295
Package Quantity	1
Warranty	Lifetime

Power

Input Voltage	12V DC
Output Voltage	12V DC

Physical &

Environmental

Color	Yellow
Material	Steel
Cable Length	18.9 in [480 mm]
Product Length	4.1 in [105.0 mm]
Product Width	0.6 in [16.0 mm]
Product Height	4.7 in [120.0 mm]
Weight of Product	2.6 oz [74.0 g]
Operating Temperature	0C to 55C (32F to 131F)
Storage Temperature	-40C to 75C (-40F to 167F)
Humidity	5~95% RH

Performance

Data Bits	5, 6, 7, 8
FIFO	TX: 1-255 Byte RX: 1-255 Byte <i>* Depending on mode and configurations</i>
Flow Control	Software (XON/XOFF), Hardware (RTS/CTS), and Xoff Re-Transmit function
Parity	None, Even, or Odd
Stop Bits	1, 1.5, 2
Max Baud Rate	921.6 Kbps
Serial Protocol	RS-232
ESD Protection	+/-15kV (Air) +/-8kV (Contact)
General Specifications	Power on Pin 9: 12V DC, 5V DC or None
MTBF	160,013 hours

Hardware

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Interface Development Tools](#) **category:**

Click to view products by [Startech](#) **manufacturer:**

Other Similar products are found below :

[XR33052IDEVB](#) [XR21B1424IV64-0A-EVB](#) [P0551](#) [5346](#) [4901](#) [LIME2-SHIELD](#) [USB TO TTL](#) [USB TO RS485](#) [PL2303 USB UART Board \(type A\) V2](#) [USB-CAN-A](#) [MIKROE-5492](#) [5964](#) [TJA1145A-EVB](#) [2200002205](#) [Si86P541-KIT](#) [MXL86211C-EVK-1](#) [KIT6X02AP2T1](#) [MXL86112C-EVK-1](#) [103030295](#) [MIKROE-2335](#) [KIT_MINIWIGGLER_3_USB](#) [KITXMC4XCOMETH001TOBO1](#) [SI871XSOIC8-KIT](#) [1764](#) [1833](#) [1862](#) [EVALISO1I811TTBO1](#) [EVB81107-A1](#) [EVB-USB82514](#) [ATAB663231A-V1.2](#) [2264](#) [PS09-EVA-KIT](#) [BOB-13263](#) [BP359C](#) [ORG4572-R01-UAR](#) [XR21B1420IL28-0A-EVB](#) [28030](#) [MIKROE-2750](#) [292](#) [DFR0065](#) [DFR0077](#) [DFR0504](#) [TEL0010](#) [TEL0038](#) [TEL0070](#) [ASI4UEVBV2P1](#) [MIKROE-2517](#) [MM930Mini](#) [PCI-7841](#) [BOB-13830](#)