

7-Port USB 3.0 Hub (5Gbps) - Desktop

Product ID: ST7300USB3B



The ST7300USB3B USB 3.2 Gen 1 Hub lets you add seven external USB 3.2 Gen 1 ports to a computer from a single USB 3.2 Gen 1 host connection.


Offering data transfer rates up to 5 Gbps, the USB hub meets SuperSpeed USB 3.2 Gen 1 specifications and is backward compatible with USB 2.0 and 1.x devices.

Designed for easy port access when connecting or disconnecting devices, the hub features one-sided port orientation, with current overload detection and protection across all seven ports. The hub supports Plug-and-Play and Hot-Swap technologies, letting you switch and operate your connected devices without having to power down the host computer.

The USB hub is bus powered for use in environments where a power outlet may be unavailable, but is perfect for high-power USB devices when used with the included optional power adapter.

Backed by a StarTech.com 2-year warranty and free lifetime technical support.

Certifications, Reports and Compatibility

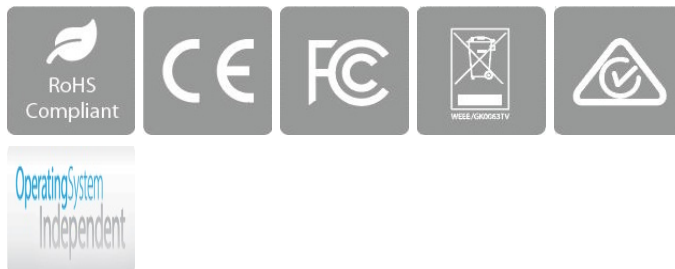

Applications

- Expand your system USB 3.2 Gen 1 capabilities with additional ports
- Make USB ports more accessible by positioning the hub anywhere within cable reach
- Extend the range of USB devices by having the hub act as a mid-point repeater
- Separate tightly packed USB ports, to better accommodate larger USB plugs or prevent overcrowding

Features

- Seven downstream USB 3.2 Gen 1 ports accessible from one side of the hub, with support for up to 5Gbps
- Universal, multi-platform compatibility, with no additional drivers required
- Plug-and-Play and Hot-Swap compatible
- Backward compatible with USB 2.0 and 1.x devices
- Current overload detection and protection on each USB port
- USB bus powered, includes optional external power adapter for high-power USB devices
- Includes USB 3.2 Gen 1 A to B cable

Hardware

Warranty	2 Years
USB-C Device Port(s)	No
USB-C Host Connection	No
Fast-Charge Port(s)	No
Ports	7
Bus Type	USB 3.2 Gen 1 (5Gbps)
Chipset ID	VIA/VLI - VL817

Performance

Maximum Data Transfer Rate	5 Gbps (USB 3.2 Gen 1)
Type and Rate	USB 3.2 Gen 1 - 5 Gbit/s
MTBF	43977.72 hours

Connector(s)

	Connector Type(s)	1 - USB 3.2 Type-B (9 pin, Gen 1, 5Gbps) 7 - USB Type-A (9 pin, 5 Gbps)
Software		
	OS Compatibility	OS Independent; No additional drivers or software required
Special Notes / Requirements		
	System and Cable Requirements	Available USB 3.0 port
	Note	If connected to a USB 2.0 host port, performance may be limited
Indicators		
	LED Indicators	7 - Hub Port Connection LEDs
Power		
	Power Source	AC Adapter Included
	Input Voltage	100 - 240 AC
	Input Current	1.5 A
	Output Voltage	12V DC
	Output Current	3 A
	Center Tip Polarity	Positive
	Plug Type	M
	Power Consumption (In Watts)	36
Environmental		
	Operating Temperature	-2C to 52C (29F to 125F)
	Storage Temperature	-20C to 56C (-4F to 132F)
	Humidity	5-95% RH
Physical Characteristics		
	Color	Black
	Form Factor	Desktop

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Interface Modules](#) category:

Click to view products by [Startech](#) manufacturer:

Other Similar products are found below :

[9441560000](#) [73-546-001](#) [ADAM-4541-C](#) [USB-CARD-READER](#) [USB-RS485](#) [USB-SATA](#) [TD501D232H](#) [RSM232D](#) [TD502D232H](#) [RS232](#)
[TO RS485](#) [TD302D232H](#) [TD501D232H](#) [RSM232](#) [RSM232D](#) [TD301D232H](#) [TD302D232H](#) [TD502D232H](#) [SAVAK-58](#) [SAVKABELCL-24](#)
[20270](#) [20294](#) [30255](#) [50260](#) [20295](#) [20277](#) [50261](#) [EUR0001H](#) [ZHB2301G](#) [30346](#) [KS-308A](#) [KS-302A](#) [KS-304A](#) [KS-1041UA](#) [KS-1021UA](#)
[CEHBB](#) [66255](#) [50985](#) [4000-68512-0940003](#) [GPS50M](#) [2200002208](#) [4000-68112-1220000](#) [44110](#) [4000-68000-1300000](#) [4000-68512-4040001](#)
[446139](#) [60004-006](#) [2200002207](#) [1020882](#) [1021056](#) [1021058](#)