

4 Port DVI USB KVM Switch with Audio and USB 2.0 Hub - TAA

Product ID: SV431DVIUA



This 4 port DVI USB KVM Switch lets you control four USB enabled, DVI capable computers from a single USB keyboard and mouse peripheral set.


Ideal for multimedia applications, the switch supports audio and microphone switching, allowing you to switch between audio/mic channels either independently or simultaneously when switching between computers for KVM control.

The DVI USB KVM switch features an integrated USB 2.0 hub which allows you to use shared USB peripherals from the control point as if the devices were connected directly to the slave computers - an economical solution that lets you use USB peripherals between computers (when selected) without the expense of buying individual peripherals for each slave computer.

If you'd like to mount this KVM switch to your server rack, StarTech.com offers a SV431RACK(sold separately) that turns this KVM into a rackmountable KVM.

This product is TAA compliant and is backed by a Startech.com 3 year warranty with lifetime technical support.

Certifications, Reports and Compatibility

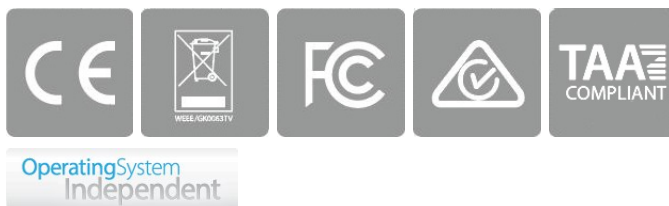

Applications

- Ideal for using desktops, workstations and servers with Flat Panel LCD monitor
- Sharing computers and USB devices in the home/SOHO/multimedia environment
- Switches instantly between PCs

Features

- 4-port DVI USB KVM switch with audio and microphone switching and 2 x USB 2.0 hub ports
- Channel selection/Hub port control by front-panel push buttons
- DVI interface technology supports digital video signal transmission
- Independent/simultaneous audio & mic channel and PC port selection
- USB keyboard and mouse support

General

UPC	065030824958
Package Quantity	1
Warranty	3 Years

Power

Power Source	AC Adapter Included
Input Voltage	100 - 240 AC
Input Current	0.4A
Output Voltage	5 DC
Output Current	2
Center Tip Polarity	Positive
Plug Type	N
Power Consumption	10

Physical & Environmental

Color	Black
Material	Steel

Product Length	10.0 in [253 mm]
Product Width	1.8 in [45 mm]
Product Height	4.5 in [115 mm]
Weight of Product	36.5 oz [1034 g]
Operating Temperature	0C to 40C (32F to 104F)
Storage Temperature	-20C to 60C (-4F to 140F)
Humidity	0%~80%

Performance

IP Control	No
Hot-Key Selection	No
Port Selection Support	Push Button
On-Screen Display	No
Maximum Number of Users	1
MTBF	136000 hours
DVI Support	Yes
Maximum Analog Resolutions	2560x1600 @ 60Hz
Maximum Digital Resolutions	1920x1200 @ 60/70Hz

Hardware

CAC Support	No
Audio	Yes
Number of KVM Ports	4
Supported Platforms	USB
PC Video Type	DVI
Number of Monitors Supported	1

Rack-Mountable	Optional
Cables Included	No
Cascadable	No

Packaging & In-the-Box

Included in Package	1 - 4 Port DVI KVM Switch
	4 - Rubber Feet
	1 - Power Adapter
	1 - User Manual
Package Width	16.3 in [414 mm]
Package Depth	8.5 in [215 mm]
Package Height	3.6 in [91 mm]
Shipping (Package) Weight	53.9 oz [1526 g]

Connector(s)

Host Connector 1 (Quantity)	4
Host Connector 1	DVI-I Dual-Link (29-Pin)
Host Connector 2 (Quantity)	4
Host Connector 2	USB-B (480Mbps, 2.5W)
Host Connector 3 (Quantity)	8
Host Connector 3	3.5mm (3 Conductors, TRS)
Connector 1 (Quantity)	2
Connector 1	USB-A (480Mbps, 2.5W)
Connector 2 (Quantity)	1
Connector 2	DVI-I Dual-Link (29-Pin)
Connector 3 (Quantity)	2

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Interface Modules](#) ***category:***

Click to view products by [Startech](#) ***manufacturer:***

Other Similar products are found below :

[9441560000](#) [73-546-001](#) [ADAM-4541-C](#) [USB-CARD-READER](#) [USB-RS485](#) [USB-SATA](#) [TD501D232H](#) [RSM232D](#) [TD502D232H](#) [RS232](#)
[TO RS485](#) [TD302D232H](#) [TD501D232H](#) [RSM232](#) [RSM232D](#) [TD301D232H](#) [TD302D232H](#) [TD502D232H](#) [SAVAK-58](#) [SAVKABELCL-24](#)
[20270](#) [20294](#) [30255](#) [50260](#) [20295](#) [20277](#) [50261](#) [EUR0001H](#) [ZHB2301G](#) [30346](#) [KS-308A](#) [KS-302A](#) [KS-304A](#) [KS-1041UA](#) [KS-1021UA](#)
[CEHBB](#) [66255](#) [50985](#) [4000-68512-0940003](#) [GPS50M](#) [2200002208](#) [4000-68112-1220000](#) [44110](#) [4000-68000-1300000](#) [4000-68512-4040001](#)
[446139](#) [60004-006](#) [2200002207](#) [1020882](#) [1021056](#) [1021058](#)