


State of the Art, Inc.

M55342/11 Thin Film Chip Resistor

0402 Size, Surface Mount, Solderable

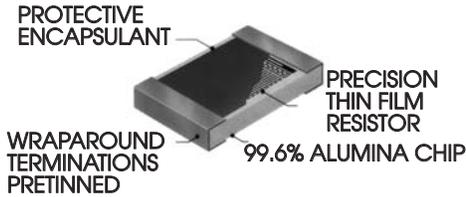

FEATURES

- Tolerances to $\pm 0.1\%$
- Operating temperature range : -55°C to $+150^{\circ}\text{C}$
- Pretinned (Sn60) nickel barrier terminations
- TCR's to ± 25 ppm
- Suitable for solder reflow, vapor phase, or wave solder attachment

PERFORMANCE CHARACTERISTICS



Resistance Range(1)	5.6 Ω - 100K Ω
Tolerances	0.1%, 1%, 2%, 5% 10%
Maximum Power	40mW
Maximum Voltage	25 Volts

ENVIRONMENTAL PERFORMANCE (2)



TCR (-55 to +125 $^{\circ}\text{C}$ in ppm/ $^{\circ}\text{C}$)	< 25 ppm
Thermal Shock	$\pm 0.03\%$
Low Temperature Operation	$\pm 0.02\%$
Short-time Overload	$\pm 0.02\%$
Resistance to Bonding Exposure	$\pm 0.03\%$
Moisture Resistance	$\pm 0.05\%$
High Temperature Exposure	$\pm 0.05\%$
Life	See Chart

(1) 0.1% tolerance 100 Ω to 100K Ω .
 (2) Typical resistance change, the maximum is the same as MIL-PRF-55342. Test methods are per MIL-PRF-55342.

Solderability: Solder coating compatible with Sn60, 62 or 63 solders, provides good wetting with all types of solder attachment. All product is tested IAW Mil-Std-202, method 208, including 8 hour steam aging.

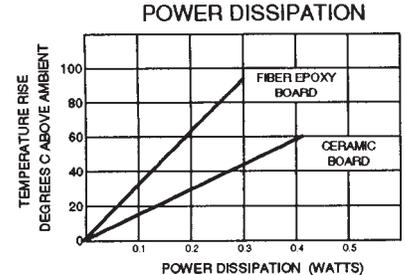

TYPICAL LIFE TEST PERFORMANCE

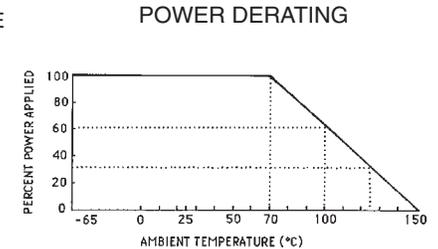

PART NUMBERING

M55342 H 11B 100D R

PRODUCT LEVEL DESIGNATOR*

M: 1% per 1000 hrs. R: 0.01% per 1000 hrs.
 P: 0.1% per 1000 hrs T: Space Level
 C: Non - ER

RESISTANCE AND TOLERANCE CODE

Three significant digits, with a letter indicating the decimal location, and the tolerance, and the value range (Ω , K Ω , M Ω)

A: 0.1% Ω D: 1% Ω G: 2% Ω J: 5% Ω M: 10% Ω
 B: 0.1%K Ω E: 1%K Ω H: 2%K Ω K: 5%K Ω N: 10%K Ω
 C: 0.1%M Ω F: 1%M Ω T: 2%M Ω L: 5%M Ω P: 10%M Ω

TCR

E: ± 25 ppm H: ± 50 ppm K: ± 100 ppm

MECHANICAL

	INCHES	MM
Length	.042 ($\pm .008$)	1.067 ($\pm .203$)
Width	.022 ($\pm .005$)	.559 ($\pm .127$)
Thickness	.010 - .033	.254 - .838
Top Term.	.010 ($\pm .005$)	.254 - ($\pm .127$)
Bottom Term.	.010 ($\pm .005$)	.254 - ($\pm .127$)

Approx. Weight .0011 grams

PACKAGING

Two packaging options are available:

Waffle Pack - (360 per Tray Max.)
 Tape & Reel - (5000 per 7" Inch Reel Max.)

* PRODUCT LEVELS

All product levels are based on the same design as our "R" level failure rate Established Reliability part. Level C is a Non-Established Reliability part requiring no group A, B or C testing. Established Reliability (failure rates based on life testing) product levels M,P, and R are subject to group A, B and C testing per MIL-PRF-55342. Space product level T requires group A and B tests including 100% power conditioning.

OPTIONS

Termination type wraparound style (pretinned with a Ni barrier), and type W (wire bondable) are available. Also available in thick film MIL-PRF-55342 characteristic K & M. SOTA offers a full line of component parts in the 0402 size including Standard Grade, High-Reliability (customer specified testing), and zero-ohm jumpers.

STATE OF THE ART, INC. 2470 Fox Hill Road, State College, PA 16803-1797

Phone (814) 355-8004 Fax (814) 355-2714 Toll Free 1-800-458-3401

10/25/00

Where Quality Isn't a Goal...It's Our Tradition

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Thick Film Resistors - SMD category:](#)

Click to view products by [State Of The Art manufacturer:](#)

Other Similar products are found below :

[CRCW04028R20JNEE](#) [CRCW06036K80FKEE](#) [CRG1206F1K58](#) [CRL0603-FW-R700ELF](#) [M55342K06B6E19RWL](#) [RC1005F1072CS](#)
[RC1005F471CS](#) [RC1005F4751CS](#) [RCP0603W100RGED](#) [RCWP72251K47FKWB](#) [RLR05C7501GPB14](#) [RLR07C5111FSBSL](#) [ERJ-](#)
[1GMF1R00C](#) [ERJ-1GMF1R20C](#) [ERJ-1GMF2R55C](#) [ERJ-1GMF8R66C](#) [25121WF1003T4E](#) [25.501.3653.0](#) [290-1.0M-RC](#) [292-1.0M-RC](#) [292-](#)
[2.2K-RC](#) [292-4.7K-RC](#) [25121WF4700T4E](#) [292-470K-RC](#) [302-1.0M-RC](#) [CPG1206F10KC](#) [CRCW02011R00FXED](#) [CRCW060315K0FKEE](#)
[CRCW060320K5FKEE](#) [CRG0201F10K](#) [RCG0402150RFKED](#) [RCG04023K92FKED](#) [RCP2512B100RGWB](#) [RCWP110010R0FKS3](#)
[RCWP11002K00FKS3](#) [RCWP12061K00FKS2](#) [3520510RJT](#) [352075KJT](#) [M55342K11B9E53RUL](#) [RMC16-102JT](#) [RMC1JPTE](#) [TR0603MR-](#)
[075K1L](#) [5-2176094-4](#) [35202K7JT](#) [WF06Q1000FTL](#) [ERJ-S03J1R0V](#) [ERJ-S14J4R7U](#) [CHP2512L4R30GNT](#) [CPCC10270R0JE32](#)
[RCWP11001K00FKS3](#)