


A-SLK4-R

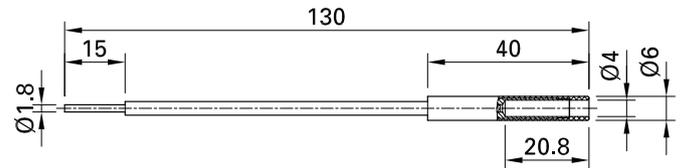

Item number 24.0162-*

Insulated flexible copper conductor, suitable for many types of screw clamp connections, e.g., rail mounted terminals. Ø 4 mm rigid socket in insulator, made of brass, accepting spring-loaded Ø 4 mm plugs with rigid insulating sleeve.

| Technical data | |
|--------------------------------------|--|
| Diameter of plug system | 4 mm |
| Rated Values | 1000 V, CAT II, 32 A |
| Surface treatment electrical contact | Ni |
| Base material electrical contact | CuZn |
| Standard color(s) * | 21 22 23 24 25 26 27 29 |
| Optional color(s) | 28 |
| Test accessory acc. to | IEC EN 61010-031 |
| User-Information | I 010 |
| Approvals | CE |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Test Probes](#) category:

Click to view products by [STAUBLI](#) manufacturer:

Other Similar products are found below :

[6214](#) [6474](#) [R941850000](#) [1541636](#) [1906693](#) [973995100](#) [CT3982B-120](#) [MO50-PINS](#) [20009209-03](#) [2294865-1](#) [20009209-02](#) [CT4386](#) [PP023-1](#) [PP026-1](#) [PK103](#) [PK-ZS-013](#) [RT-ZP05S](#) [68.9481-22](#) [20060](#) [21020](#) [24.243.3](#) [24.245.2](#) [24.243.5](#) [24.243.4](#) [24.243.1](#) [24.243.2](#) [24.245.1](#) [20.157.1](#) [CT4203](#) [6019](#) [CT2676ARA](#) [CT3662](#) [27.258.4](#) [UT-P30](#) [ADABV140-J](#) [405-IEC-N](#) [ADA32/1.4-N](#) [6016](#) [ADABV140-N](#) [102183](#) [102190](#) [402-IEC-RT](#) [AX-CP-05-B](#) [AX-CP-05-R](#) [00043](#) [BU-P5519A](#) [00125](#) [MPS1RT](#) [0602](#) [0645](#) [FLUKE 80PK-22](#)