



## N-channel 60 V, 0.0057 Ω typ., 90 A STripFET™ F6 Power MOSFET in a TO-220 package

Datasheet - production data

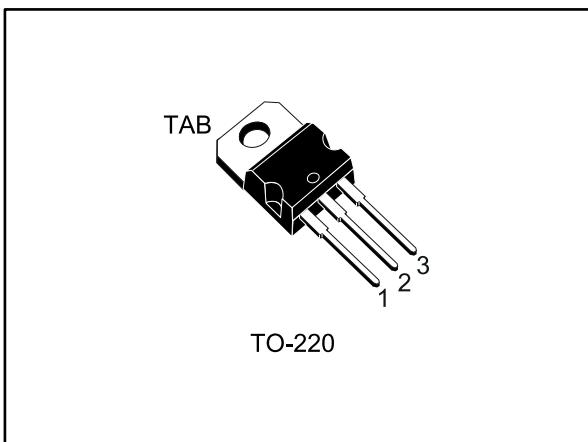

**Figure 1: Internal schematic diagram**

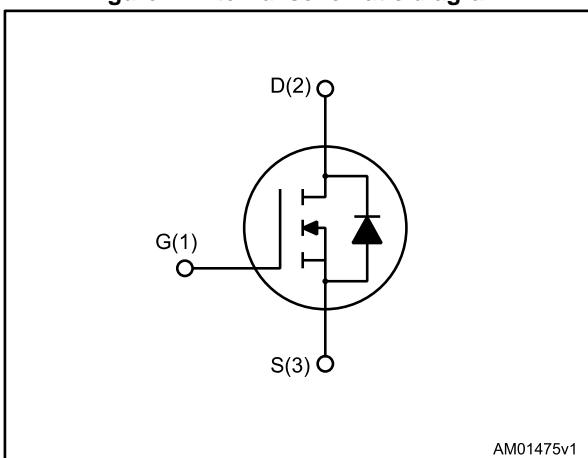

## Features

**Table 1: Device summary**

Order code	Marking	Package	Packaging
STP90N6F6	90N6F6	TO-220	Tube

## Contents

<b>1</b>	<b>Electrical ratings .....</b>	<b>3</b>
<b>2</b>	<b>Electrical characteristics .....</b>	<b>4</b>
2.1	Electrical characteristics (curves).....	6
<b>3</b>	<b>Test circuits .....</b>	<b>8</b>
<b>4</b>	<b>Package information .....</b>	<b>9</b>
4.1	TO-220 type A package information.....	10
<b>5</b>	<b>Revision history .....</b>	<b>12</b>

# 1 Electrical ratings

**Table 2: Absolute maximum ratings**

Symbol	Parameter	Value	Unit
$V_{DS}$	Drain-source voltage	60	V
$V_{GS}$	Gate-source voltage	$\pm 20$	V
$I_D$	Drain current (continuous) at $T_C = 25^\circ\text{C}$	90	A
$I_D$	Drain current (continuous) at $T_C = 100^\circ\text{C}$	70	A
$I_{DM}^{(1)}$	Drain current (pulsed)	360	A
$P_{TOT}$	Total dissipation at $T_C = 25^\circ\text{C}$	136	W
$T_{stg}$	Storage temperature	- 55 to 175	$^\circ\text{C}$
$T_j$	Max. operating junction temperature	175	$^\circ\text{C}$

**Notes:**

(1) Pulse width limited by safe operating area.

**Table 3: Thermal data**

Symbol	Parameter	Value	Unit
$R_{thj-case}$	Thermal resistance junction-case max.	1.1	$^\circ\text{C}/\text{W}$
$R_{thj-amb}$	Thermal resistance junction-ambient max.	62.5	$^\circ\text{C}/\text{W}$

**Table 4: Avalanche characteristics**

Symbol	Parameter	Value	Unit
$I_{AR}$	Avalanche current, repetitive or not repetitive (pulse width limited by $T_{jmax}$ )	45	A
$E_{AS}$	Single pulse avalanche energy (starting $T_j = 25^\circ\text{C}$ , $I_D = I_{AV}$ , $V_{DD} = 43\text{ V}$ )	152	mJ

## 2 Electrical characteristics

( $T_C = 25^\circ\text{C}$  unless otherwise specified).

**Table 5: Static**

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
$V_{(\text{BR})\text{DSS}}$	Drain-source breakdown voltage	$V_{GS} = 0 \text{ V}, I_D = 250 \mu\text{A}$	60			V
$I_{\text{DSS}}$	Zero gate voltage drain current	$V_{GS} = 0 \text{ V}, V_{DS} = 60 \text{ V}$			10	$\mu\text{A}$
		$V_{GS} = 0 \text{ V}, V_{DS} = 60 \text{ V}, T_j = 125^\circ\text{C}$			100	$\mu\text{A}$
$I_{GSS}$	Gate-body leakage current	$V_{DS} = 0 \text{ V}, V_{GS} = \pm 20 \text{ V}$			$\pm 100$	nA
$V_{GS(\text{th})}$	Gate threshold voltage	$V_{DS} = V_{GS}, I_D = 250 \mu\text{A}$	2		4	V
$R_{DS(\text{on})}$	Static drain-source on-resistance	$V_{GS} = 10 \text{ V}, I_D = 45 \text{ A}$		0.0057	0.0063	$\Omega$

**Table 6: Dynamic**

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
$C_{iss}$	Input capacitance	$V_{DS} = 25 \text{ V}, f = 1 \text{ MHz}, V_{GS} = 0 \text{ V}$	-	4295	-	pF
$C_{oss}$	Output capacitance		-	292	-	pF
$C_{rss}$	Reverse transfer capacitance		-	190	-	pF
$Q_g$	Total gate charge	$V_{DD} = 30 \text{ V}, I_D = 90 \text{ A}, V_{GS} = 10 \text{ V}$ (see <a href="#">Figure 14: "Gate charge test circuit"</a> )	-	74.9	-	nC
$Q_{gs}$	Gate-source charge		-	19	-	nC
$Q_{gd}$	Gate-drain charge		-	18.3	-	nC
$R_g$	Intrinsic gate resistance	$f = 1 \text{ MHz}$ open drain	-	2.2	-	$\Omega$

**Table 7: Switching times**

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
$t_{d(on)}$	Turn-on delay time	$V_{DD} = 30 \text{ V}, I_D = 45 \text{ A}$ $R_G = 4.7 \Omega, V_{GS} = 10 \text{ V}$ (see <a href="#">Figure 13: "Switching times test circuit for resistive load"</a> and <a href="#">Figure 18: "Switching time waveform"</a> )	-	22	-	ns
$t_r$	Rise time		-	42	-	ns
$t_{d(off)}$	Turn-off-delay time		-	73	-	ns
$t_f$	Fall time		-	16	-	ns

Table 8: Source-drain diode

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
$V_{SD}^{(1)}$	Forward on voltage	$V_{GS} = 0 \text{ V}$ , $I_{SD} = 90 \text{ A}$	-		1.3	V
$t_{rr}$	Reverse recovery time	$I_{SD} = 90 \text{ A}$ , $dI/dt = 100 \text{ A}/\mu\text{s}$ ,	-	49		ns
$Q_{rr}$	Reverse recovery charge	$V_{DD} = 48 \text{ V}$ , $T_j = 25^\circ\text{C}$ (see <i>Figure 15: "Test circuit for inductive load switching and diode recovery times"</i> )	-	8.5		$\mu\text{C}$
$I_{RRM}$	Reverse recovery current		-	0.3		A

**Notes:**(1) Pulse test: pulse duration = 300  $\mu\text{s}$ , duty cycle 1.5%.

## 2.1

## Electrical characteristics (curves)

Figure 2: Safe operating area

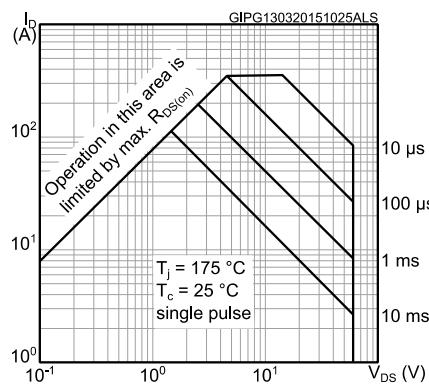


Figure 3: Thermal impedance

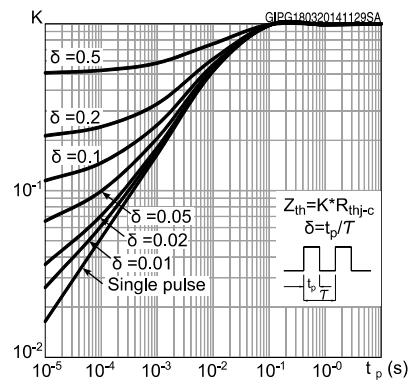


Figure 4: Output characteristics

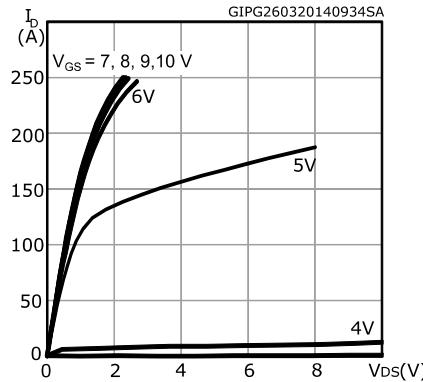


Figure 5: Transfer characteristics

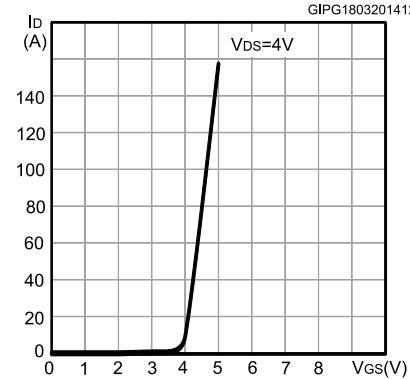


Figure 6: Normalized gate threshold voltage vs. temperature







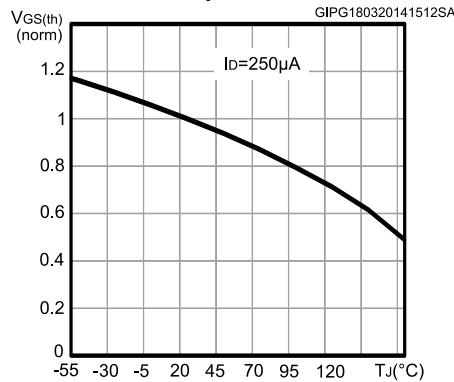



Figure 7: Normalized V(BR)DSS vs. temperature

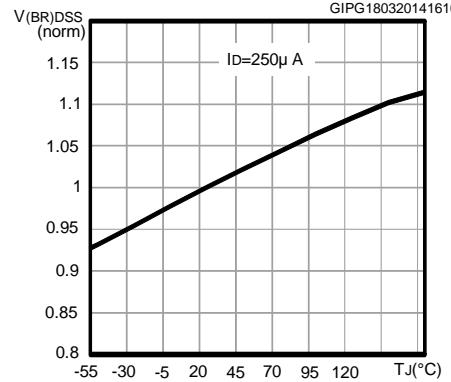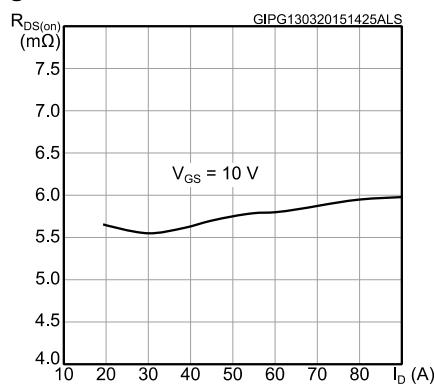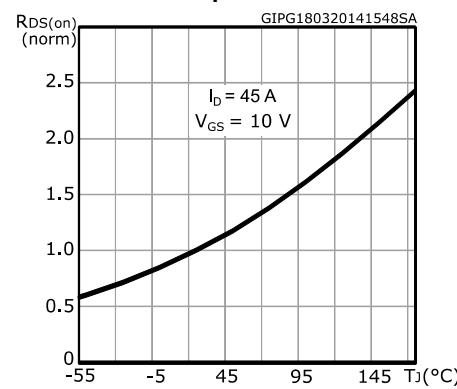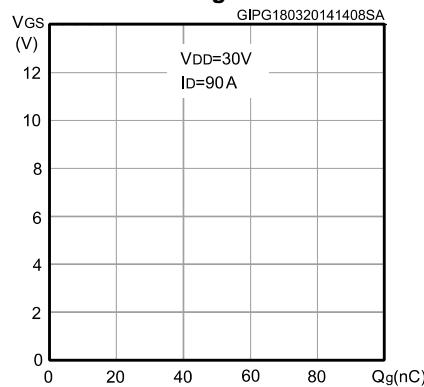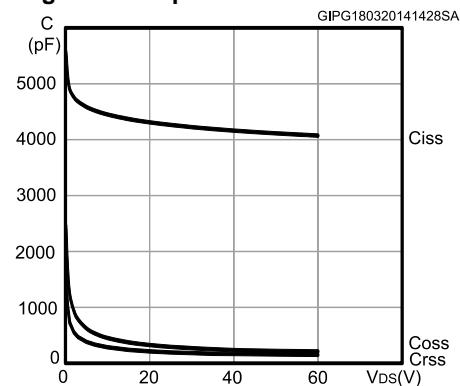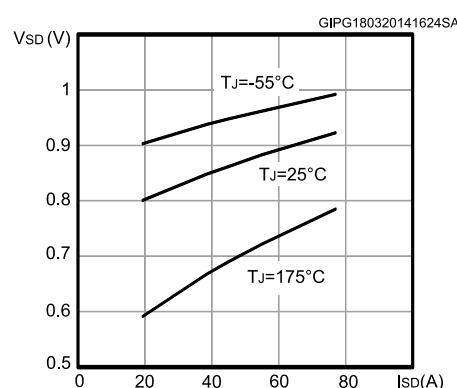


**Figure 8: Static drain-source on-resistance****Figure 9: Normalized on-resistance vs. temperature****Figure 10: Gate charge vs. gate-source voltage****Figure 11: Capacitance variations****Figure 12: Source- drain diode forward characteristics**

### 3 Test circuits


**Figure 13: Switching times test circuit for resistive load**

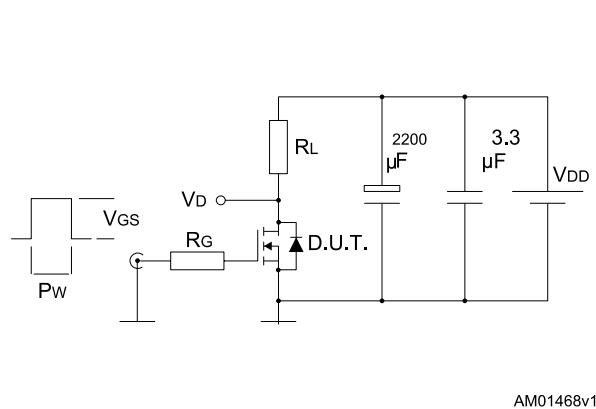


**Figure 14: Gate charge test circuit**

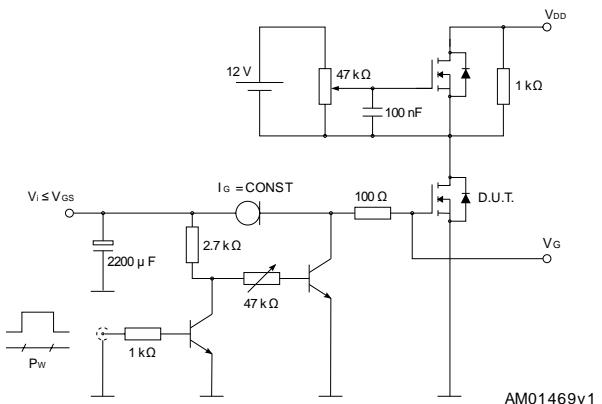


**Figure 15: Test circuit for inductive load switching and diode recovery times**

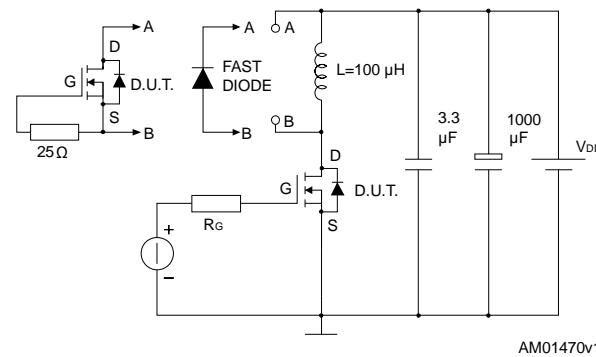


**Figure 16: Unclamped inductive load test circuit**

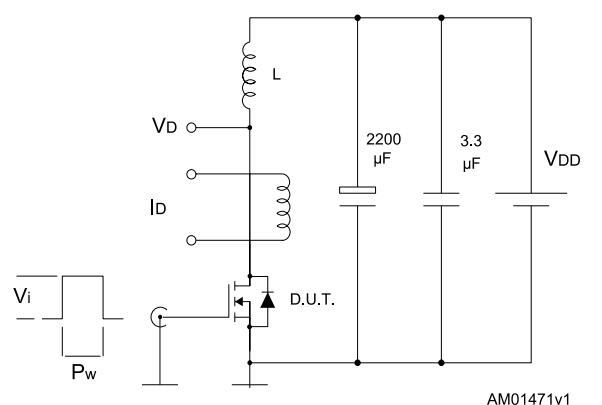

**Figure 17: Unclamped inductive waveform**

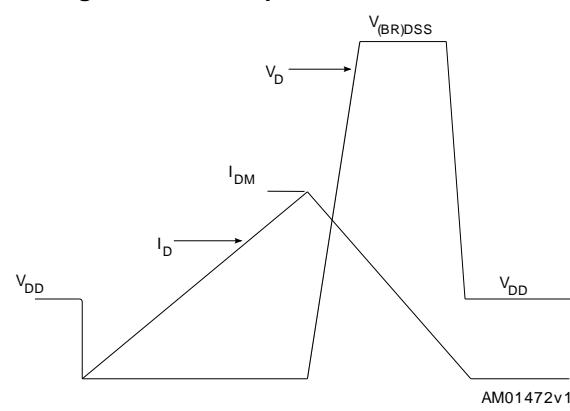

**Figure 18: Switching time waveform**

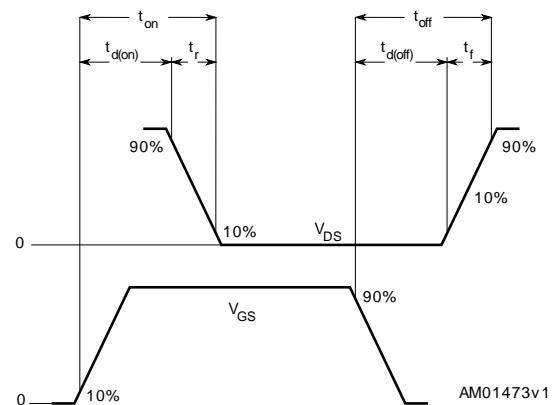

## 4 Package information

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK® specifications, grade definitions and product status are available at: [www.st.com](http://www.st.com).  
ECOPACK® is an ST trademark.

## 4.1 TO-220 type A package information

Figure 19: TO-220 type A package outline

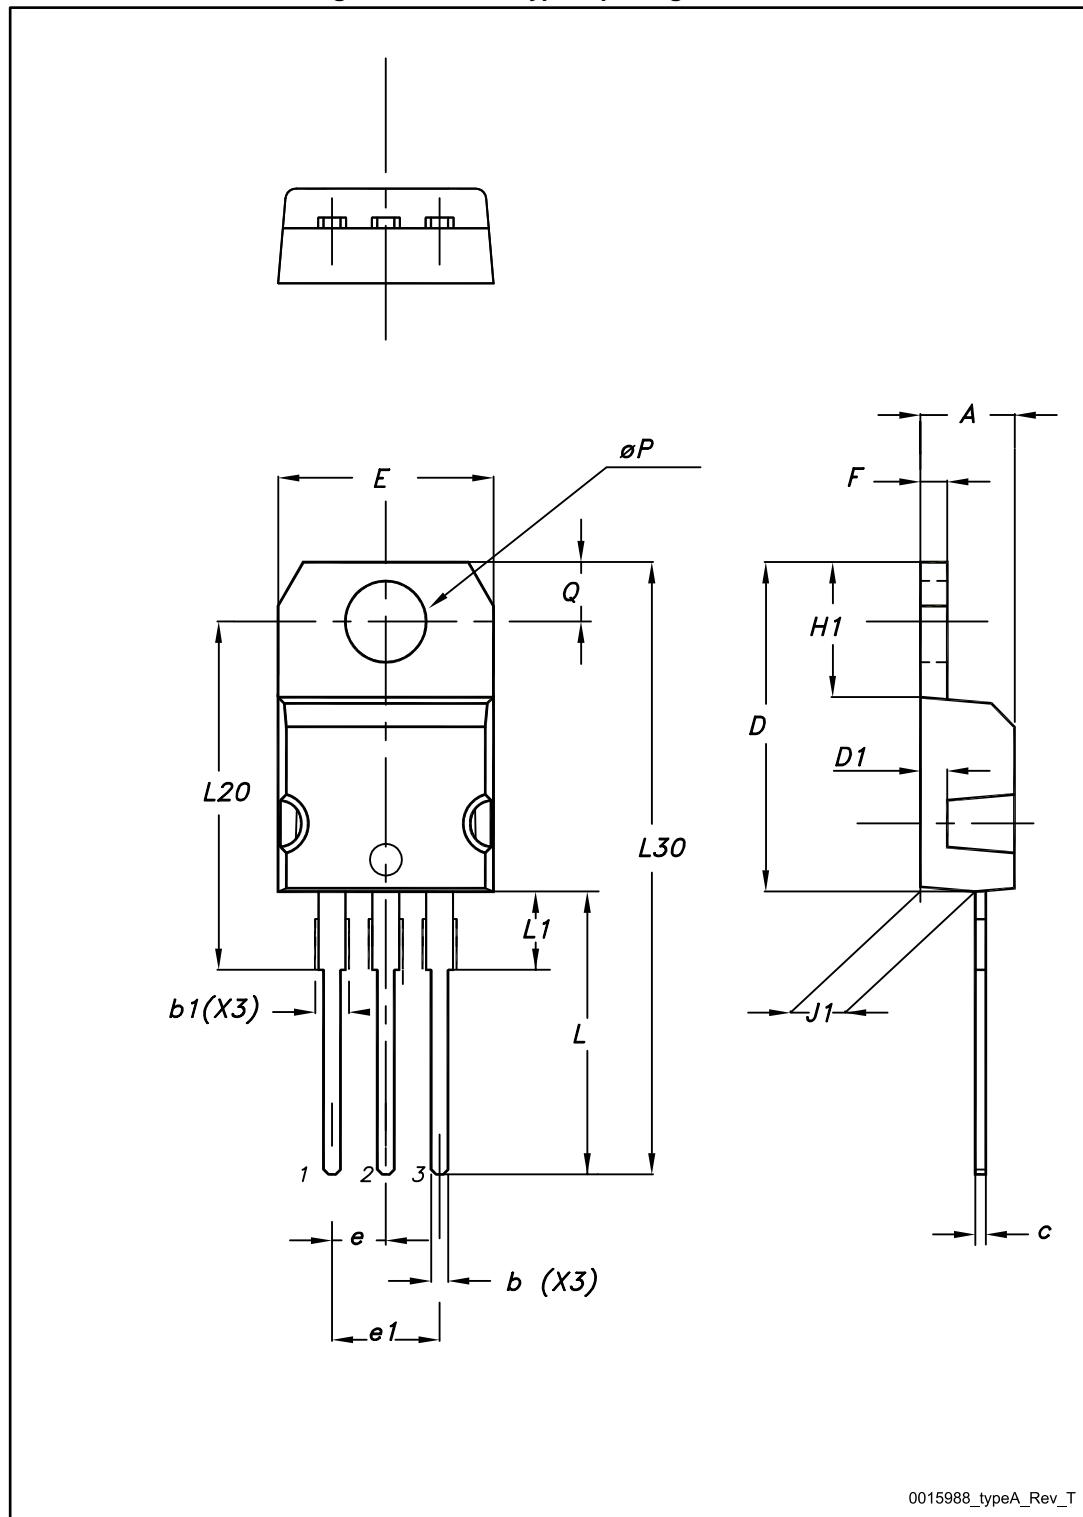


Table 9: TO-220 type A mechanical data

Dim.	mm		
	Min.	Typ.	Max.
A	4.40		4.60
b	0.61		0.88
b1	1.14		1.70
c	0.48		0.70
D	15.25		15.75
D1		1.27	
E	10		10.40
e	2.40		2.70
e1	4.95		5.15
F	1.23		1.32
H1	6.20		6.60
J1	2.40		2.72
L	13		14
L1	3.50		3.93
L20		16.40	
L30		28.90	
ØP	3.75		3.85
Q	2.65		2.95

## 5 Revision history

Table 10: Document revision history

Date	Revision	Changes
03-Sep-2013	1	Initial release.
03-Apr-2014	2	Document status promoted from preliminary to production data. Updated new section curves. Minor text changes.
13-Mar-2015	3	Minor text edits throughout document On cover page: updated title description, features table and description In section 1 Electrical ratings: renamed and updated Table 5 "Static" (was On/off states), Table 6 "Dynamic", Table 7 "Switching times", Table 8 "Source-drain diode" In section 2 Electrical characteristics: updated Table 2 "Absolute maximum ratings" and Table 4 "Avalanche characteristics"; updated Section 2.1 Electrical characteristics (curves)

**IMPORTANT NOTICE – PLEASE READ CAREFULLY**

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2015 STMicroelectronics – All rights reserved

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for MOSFET category:***

***Click to view products by STMicroelectronics manufacturer:***

Other Similar products are found below :

[614233C](#) [648584F](#) [IRFD120](#) [JANTX2N5237](#) [SPP20N60S5XK](#) [FCA20N60\\_F109](#) [FDZ595PZ](#) [2SK2545\(Q,T\)](#) [405094E](#) [423220D](#)  
[TPCC8103,L1Q\(CM](#) [MIC4420CM-TR](#) [VN1206L](#) [SBVS138LT1G](#) [614234A](#) [715780A](#) [NTNS3166NZT5G](#) [SSM6J414TU,LF\(T](#) [751625C](#)  
[BUK954R8-60E](#) [DMN3404LQ-7](#) [NTE6400](#) [SQJ402EP-T1-GE3](#) [2SK2614\(TE16L1,Q\)](#) [2N7002KW-FAI](#) [DMN1017UCP3-7](#)  
[EFC2J004NUZTDG](#) [ECH8691-TL-W](#) [FCAB21350L1](#) [P85W28HP2F-7071](#) [DMN1053UCP4-7](#) [NTE221](#) [NTE2384](#) [NTE2903](#) [NTE2941](#)  
[NTE2945](#) [NTE2946](#) [NTE2960](#) [NTE2967](#) [NTE2969](#) [NTE2976](#) [NTE455](#) [NTE6400A](#) [NTE2910](#) [NTE2916](#) [NTE2956](#) [NTE2911](#)  
[DMN2080UCB4-7](#) [TK10A80W,S4X\(S](#) [SSM6P69NU,LF](#)