


## 120 V power Schottky rectifier

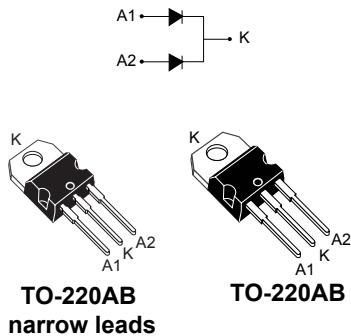

### Features

- High junction temperature capability
- Avalanche rated
- Low leakage current
- Good trade-off between leakage current and forward voltage drop
- ECOPACK®2 compliant

### Applications

- Switching diode
- SMPS
- DC/DC converter
- LED lighting
- Notebook adapter

### Description

This dual center tap Schottky rectifier is ideally suited for high frequency switch mode power supply.

Packaged in TO-220AB and TO-220AB narrow leads, the **STPS40120C** is optimized for use in notebook and LCD adapters, desktop SMPS, providing in these applications a margin between the remaining voltages applied on the diode and the voltage capability of the diode.

| Product status link        |          |
|----------------------------|----------|
| <a href="#">STPS40120C</a> |          |
| Product summary            |          |
| Symbol                     | Device   |
| $I_{F(AV)}$                | 2 x 20 A |
| $V_{RRM}$                  | 120 V    |
| $T_j$ (max.)               | 175 °C   |
| $V_F$ (typ.)               | 0.69 V   |

## 1 Characteristics

**Table 1. Absolute ratings (limiting values at 25 °C unless otherwise specified, per diode)**

| Symbol       | Parameter   | Value  | Unit             |
|--------------|---|--|------------------|
| $V_{RRM}$    | Repetitive peak reverse voltage   | 120  | V                |
| $I_{F(RMS)}$ | Forward rms current   | 30   | A                |
| $I_{F(AV)}$  | Average forward current , $T_c = 145 \text{ }^\circ\text{C}$ , $\delta = 0.5$ | Per diode  | 20               |
|              |   | Per device   | 40               |
| $I_{FSM}$    | Surge non repetitive forward current  | $t_p = 10 \text{ ms sinusoidal}$                         | 200              |
| $P_{ARM}$    | Repetitive peak avalanche power   | $t_p = 10 \mu\text{s}, T_j = 125 \text{ }^\circ\text{C}$ | 755              |
| $T_{stg}$    | Storage temperature range   | -65 to +175  | $^\circ\text{C}$ |
| $T_j$        | Maximum operating junction temperature <sup>(1)</sup>                         | 175  | $^\circ\text{C}$ |

1.  $(dP_{tot}/dT_j) < (1/R_{th(j-a)})$  condition to avoid thermal runaway for a diode on its own heatsink.

**Table 2. Thermal resistance parameters**

| Symbol        | Parameter        | Max. value | Unit |
|---------------|------------------|------------|------|
| $R_{th(j-c)}$ | Junction to case | Per diode  | 1.6  |
|               |                  | Total      | 0.85 |
| $R_{th(c)}$   | Coupling         | 0.1        |      |

When the diodes 1 and 2 are used simultaneously:

$$\Delta T_j(\text{diode 1}) = P(\text{diode 1}) \times R_{th(j-c)}(\text{per diode}) + P(\text{diode 2}) \times R_{th(c)}$$

**Table 3. Static electrical characteristics**

| Symbol      | Parameter               | Test conditions                    |                       | Min. | Typ. | Max. | Unit |
|-------------|-------------------------|------------------------------------|-----------------------|------|------|------|------|
|             |                         | $T_j = 25 \text{ }^\circ\text{C}$  | $V_R = V_{RRM}$       |      |      |      |      |
| $I_R^{(1)}$ | Reverse leakage current | $T_j = 125 \text{ }^\circ\text{C}$ | $I_F = 7.5 \text{ A}$ | -    | 4    | 12   | mA   |
|             |                         | $T_j = 25 \text{ }^\circ\text{C}$  |                       | -    |      | 0.73 |      |
|             | Forward voltage drop    | $T_j = 125 \text{ }^\circ\text{C}$ | $I_F = 20 \text{ A}$  | -    | 0.57 | 0.61 | V    |
|             |                         | $T_j = 25 \text{ }^\circ\text{C}$  |                       | -    |      | 0.90 |      |
|             |                         | $T_j = 125 \text{ }^\circ\text{C}$ | $I_F = 40 \text{ A}$  | -    | 0.69 | 0.73 |      |
|             |                         | $T_j = 25 \text{ }^\circ\text{C}$  |                       | -    |      | 1.00 |      |
|             |                         | $T_j = 125 \text{ }^\circ\text{C}$ |                       | -    | 0.83 | 0.88 |      |

1. Pulse test:  $t_p = 5 \text{ ms}$ ,  $\delta < 2\%$

2. Pulse test:  $t_p = 380 \mu\text{s}$ ,  $\delta < 2\%$

To evaluate the conduction losses, use the following equation:


$$P = 0.58 \times I_{F(AV)} + 0.0075 \times I_{F(RMS)}^2$$

For more information, please refer to the following application notes related to the power losses :


- AN604: Calculation of conduction losses in a power rectifier
- AN4021: Calculation of reverse losses on a power diode

## 1.1 Characteristics (curves)


**Figure 1. Average forward power dissipation versus average forward current (per diode)**

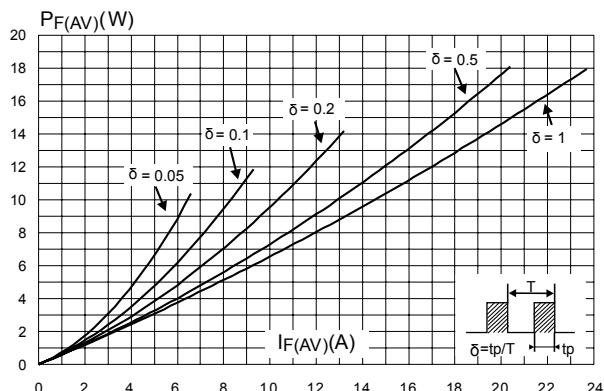


**Figure 2. Average forward current versus ambient temperature ( $\delta = 0.5$ , per diode)**

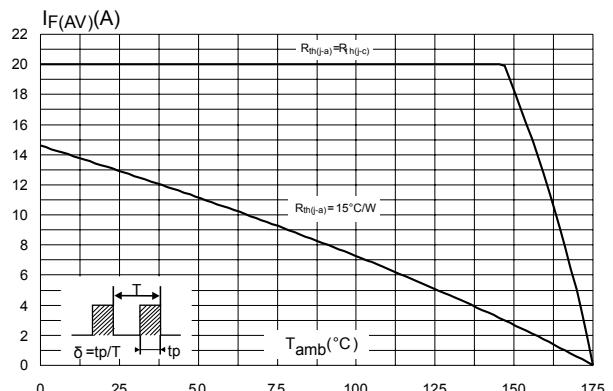


**Figure 3. Normalized avalanche power derating versus pulse duration ( $T_j = 125 \text{ }^{\circ}\text{C}$ )**

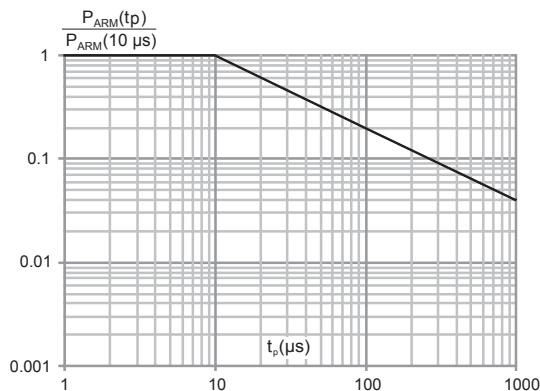


**Figure 4. Relative variation of thermal impedance junction to case versus pulse duration**

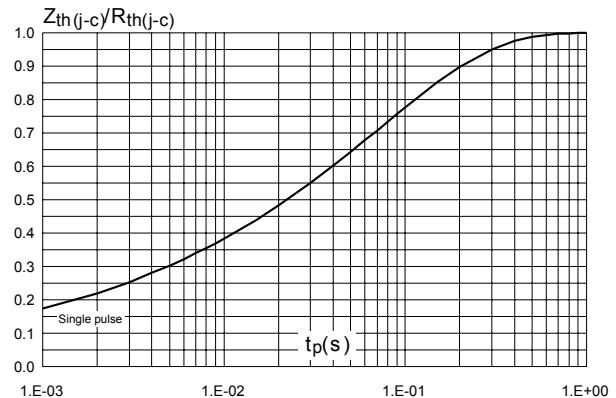


**Figure 5. Reverse leakage current versus reverse voltage applied (typical values, per diode)**

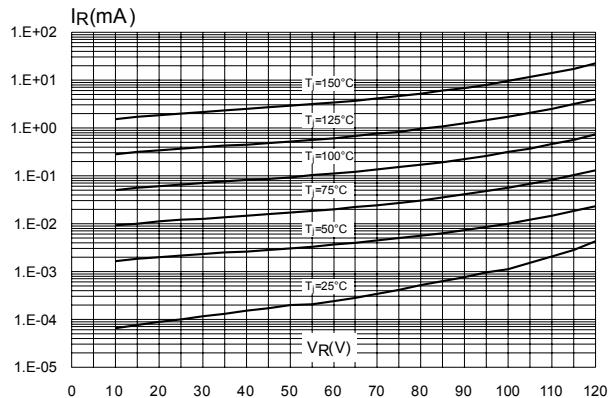

**Figure 6. Junction capacitance versus reverse voltage applied (typical values, per diode)**

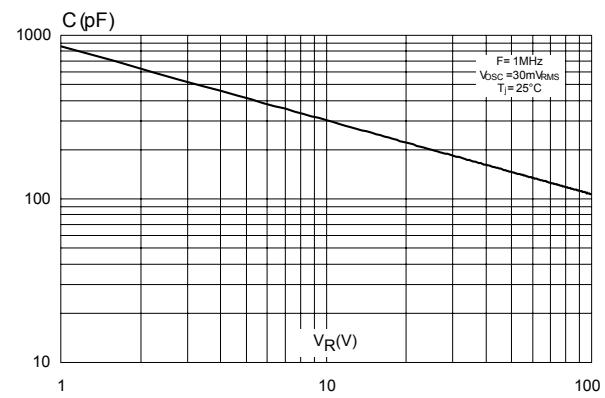

**Figure 7. Forward voltage drop versus forward current (per diode)**

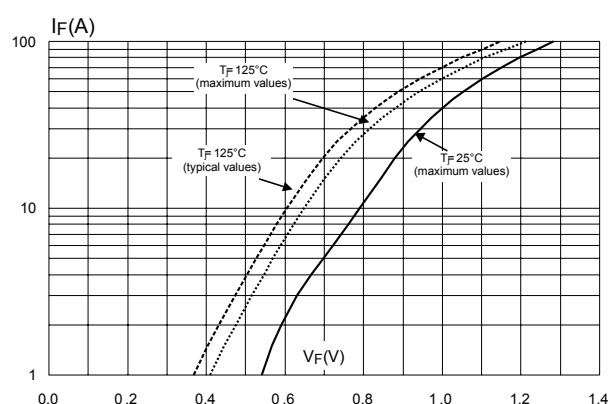


## 2 Package information

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK® specifications, grade definitions and product status are available at: [www.st.com](http://www.st.com). ECOPACK® is an ST trademark.

### 2.1 TO-220AB package information

- Epoxy meets UL 94,V0
- Cooling method: by conduction (C)
- Recommended torque value: 0.55 N·m
- Maximum torque value: 0.70 N·m

Figure 8. TO-220AB package outline

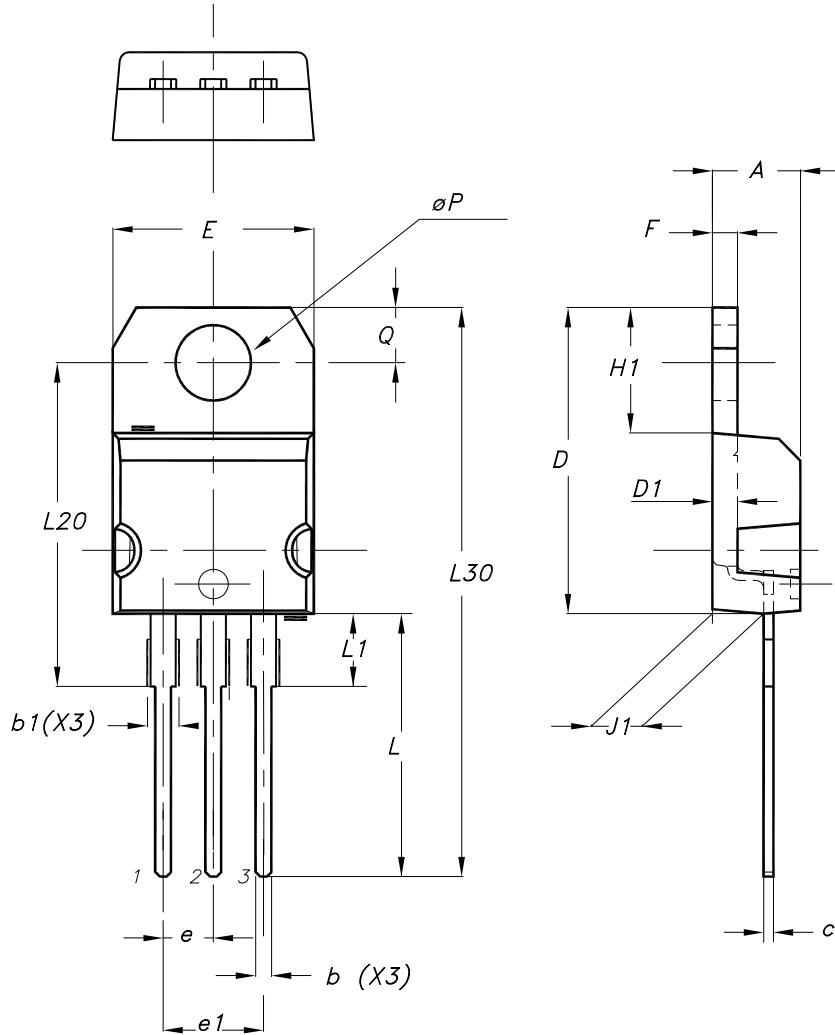

**Table 4.** TO-220AB package mechanical data


| Ref. | Dimensions  |       |                             |       |
|------|-------------|-------|-----------------------------|-------|
|      | Millimeters |       | Inches (for reference only) |       |
|      | Min.        | Max.  | Min.                        | Max.  |
| A    | 4.40        | 4.60  | 0.173                       | 0.181 |
| b    | 0.61        | 0.88  | 0.240                       | 0.035 |
| b1   | 1.14        | 1.55  | 0.045                       | 0.061 |
| c    | 0.48        | 0.70  | 0.019                       | 0.028 |
| D    | 15.25       | 15.75 | 0.600                       | 0.620 |
| D1   | 1.27 typ.   |       | 0.050 typ.                  |       |
| E    | 10.00       | 10.40 | 0.394                       | 0.409 |
| e    | 2.40        | 2.70  | 0.094                       | 0.106 |
| e1   | 4.95        | 5.15  | 0.195                       | 0.203 |
| F    | 1.23        | 1.32  | 0.048                       | 0.052 |
| H1   | 6.20        | 6.60  | 0.244                       | 0.260 |
| J1   | 2.40        | 2.72  | 0.094                       | 0.107 |
| L    | 13.00       | 14.00 | 0.512                       | 0.551 |
| L1   | 3.50        | 3.93  | 0.138                       | 0.155 |
| L20  | 16.40 typ.  |       | 0.646 typ.                  |       |
| L30  | 28.90 typ.  |       | 1.138 typ.                  |       |
| θP   | 3.75        | 3.85  | 0.148                       | 0.152 |
| Q    | 2.65        | 2.95  | 0.104                       | 0.116 |

## 2.2

## TO-220AB narrow leads package information

- Epoxy meets UL94, V0
- Cooling method: by conduction (C)
- Recommended torque value: 0.55 N·m
- Maximum torque value: 0.70 N·m

Figure 9. TO-220AB narrow leads package outline

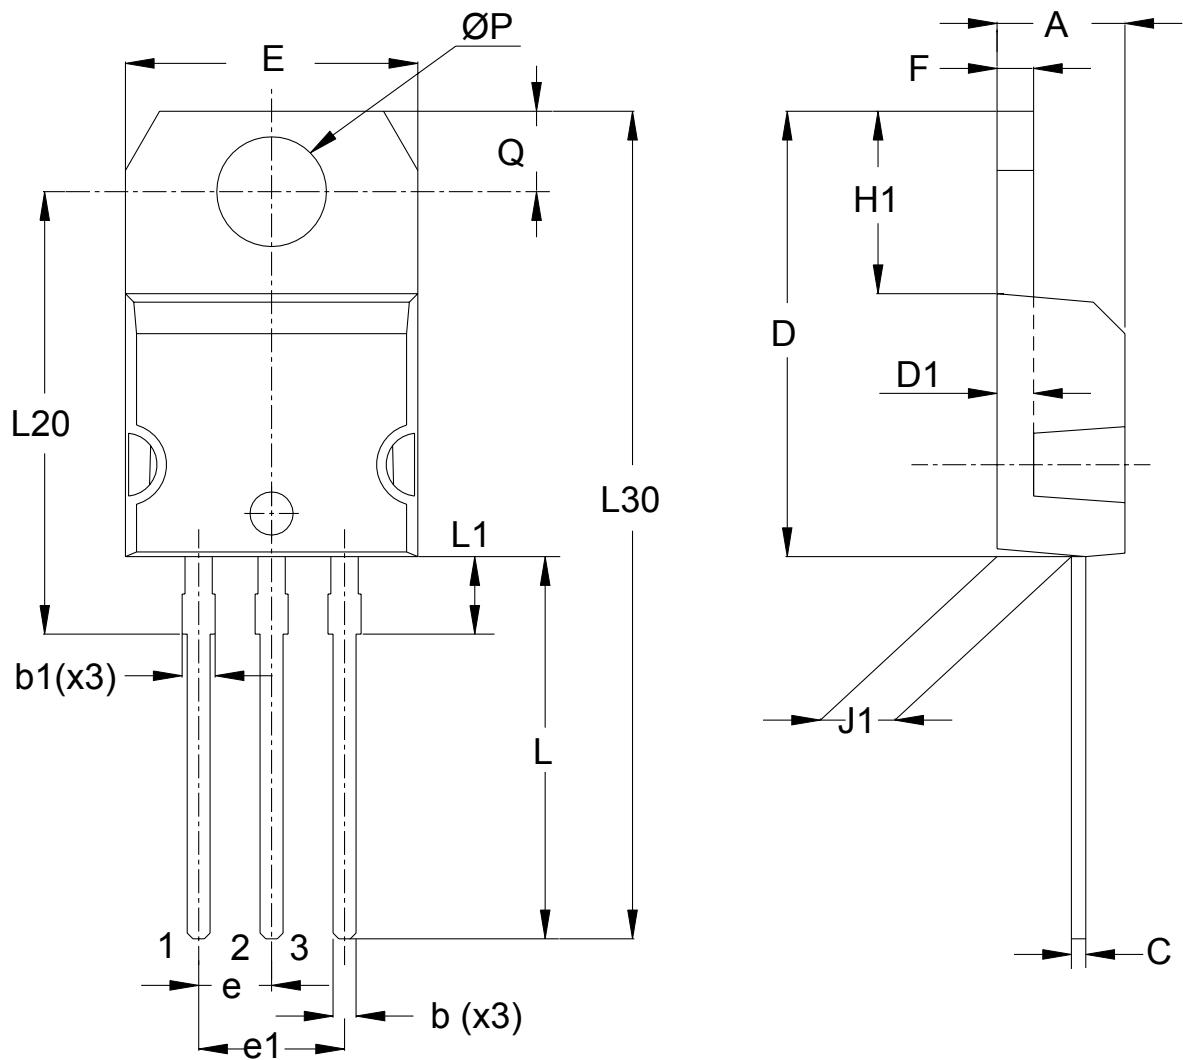

**Table 5.** TO-220AB narrow leads package mechanical data

| Ref. | Dimensions  |       |                             |       |
|------|-------------|-------|-----------------------------|-------|
|      | Millimeters |       | Inches (for reference only) |       |
|      | Min.        | Max.  | Min.                        | Max.  |
| A    | 4.40        | 4.60  | 0.173                       | 0.181 |
| b    | 0.61        | 0.88  | 0.240                       | 0.035 |
| b1   | 0.95        | 1.20  | 0.037                       | 0.047 |
| c    | 0.48        | 0.70  | 0.019                       | 0.028 |
| D    | 15.25       | 15.75 | 0.600                       | 0.620 |
| D1   | 1.27 typ.   |       | 0.050 typ.                  |       |
| E    | 10.00       | 10.40 | 0.394                       | 0.409 |
| e    | 2.40        | 2.70  | 0.094                       | 0.106 |
| e1   | 4.95        | 5.15  | 0.195                       | 0.203 |
| F    | 1.23        | 1.32  | 0.048                       | 0.052 |
| H1   | 6.20        | 6.60  | 0.244                       | 0.260 |
| J1   | 2.40        | 2.72  | 0.094                       | 0.107 |
| L    | 13.00       | 14.00 | 0.512                       | 0.551 |
| L1   | 2.60        | 2.90  | 0.138                       | 0.155 |
| L20  | 15.40 typ.  |       | 0.646 typ.                  |       |
| L30  | 28.90 typ.  |       | 1.138 typ.                  |       |
| θP   | 3.75        | 3.85  | 0.148                       | 0.152 |
| Q    | 2.65        | 2.95  | 0.104                       | 0.116 |

### 3 Ordering information

**Table 6. Ordering information**

| Order code   | Marking     | Package                  | Weight | Base qty. | Delivery mode |
|--------------|-------------|--------------------------|--------|-----------|---------------|
| STPS40120CT  | STPS40120CT | TO-220AB                 | 1.95 g | 50        | Tube          |
| STPS40120CTN | PS40120CTN  | TO-220AB<br>narrow leads | 1.9 g  | 50        | Tube          |

## Revision history

**Table 7. Document revision history**

| Date        | Version | Changes  |
|-------------|---------|--|
| 18-Feb-2005 | 1       | First issue  |
| 1-Dec-2006  | 2       | Reformatted to current standards. Added I <sup>2</sup> PAK.  |
| 15-Sep-2011 | 3       | Added TO-220AB narrow leads package.   |
| 21-Jun-2018 | 4       | Removed I <sup>2</sup> PAK package, figure 4 and figure 5.<br>Updated Figure 3. Normalized avalanche power derating versus pulse duration ( $T_j = 125^\circ\text{C}$ ) and Table 1. Absolute ratings (limiting values at $25^\circ\text{C}$ unless otherwise specified, per diode).<br>Minor text changes to improve readability. |

**IMPORTANT NOTICE – PLEASE READ CAREFULLY**

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2018 STMicroelectronics – All rights reserved

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for Schottky Diodes & Rectifiers category:***

***Click to view products by STMicroelectronics manufacturer:***

Other Similar products are found below :

[MA4E2039](#) [D1FH3-5063](#) [MBR0530L-TP](#) [MBR10100CT-BP](#) [MBR1545CT](#) [MMBD301M3T5G](#) [RB160M-50TR](#) [RB551V-30](#)  
[BAS16E6433HTMA1](#) [BAT 54-02LRH E6327](#) [NSR05F40QNXT5G](#) [NTE555](#) [JANS1N6640](#) [SB07-03C-TB-H](#) [SB1003M3-TL-W](#) [SK310-T](#)  
[SK32A-LTP](#) [SK33A-TP](#) [SK34B-TP](#) [SS3003CH-TL-E](#) [GA01SHT18](#) [CRS10I30A\(TE85L,QM](#) [MA4E2501L-1290](#) [MBRB30H30CT-1G](#)  
[SB007-03C-TB-E](#) [SK32A-TP](#) [SK33B-TP](#) [SK35A-TP](#) [SK38B-TP](#) [NRVBM120LT1G](#) [NTE505](#) [NTSB30U100CT-1G](#) [SS15E-TP](#) [VS-6CWQ10FNHM3](#) [ACDBA1100LR-HF](#) [ACDBA1200-HF](#) [ACDBA140-HF](#) [ACDBA2100-HF](#) [ACDBA3100-HF](#) [CDBQC0530L-HF](#)  
[CDBQC0240LR-HF](#) [ACDBA340-HF](#) [ACDBA260LR-HF](#) [ACDBA1100-HF](#) [SK310B-TP](#) [MA4E2502L-1246](#) [MA4E2502H-1246](#)  
[NRVBM120ET1G](#) [NSR01L30MXT5G](#) [NTE573](#)