


## 2 A, 800 V ultrafast recovery diode

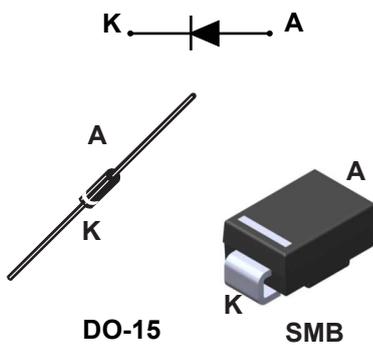

### Features

- Low forward voltage drop
- High reliability
- High surge current capability
- Soft switching for reduced EMI disturbances
- Planar technology
- ECOPACK compliant

### Applications

- Switching diode
- Power switching applications

### Description

The STTH208, which is using ST ultrafast high voltage planar technology, is specially suited for free-wheeling, clamping, snubbing, demagnetization in power supplies and other power switching applications.

Product status	
STTH208	
Product summary	
Symbol	Value
$I_{F(AV)}$	2 A
$V_{RRM}$	800 V
$T_{j(max.)}$	175 °C
$V_{F(typ.)}$	0.89 V
$t_{rr(max.)}$	75 ns

# 1 Characteristics

**Table 1. Absolute ratings (limiting values at 25 °C, unless otherwise specified)**

Symbol	Parameter		Value	Unit	
$V_{RRM}$	Repetitive peak reverse voltage		800	V	
$V_{RMS}$	RMS voltage		560	V	
$I_{F(AV)}$	Average forward current $\delta = 0.5$ , square wave	DO-15	$T_L = 60\text{ °C}$	2	A
		SMB	$T_L = 100\text{ °C}$		
$I_{FSM}$	Surge non repetitive forward current	DO-15	$t_p = 8.3\text{ ms sinusoidal}$	45	A
		SMB		35	
$T_{stg}$	Storage temperature range		-50 to +175	°C	
$T_j$	Maximum operating junction temperature		+175	°C	

**Table 2. Thermal resistance parameter**

Symbol	Parameter		Max. value	Unit	
$R_{th(j-l)}$	Junction to lead	Lead length = 10 mm on infinite heatsink	SMB	25	°C/W
	Junction to lead		DO-15	40	
$R_{th(j-a)}$	Junction to ambient			110	

For more information, please refer to the following application note :

- AN5088 : Rectifiers thermal management, handling and mounting recommendations

**Table 3. Static electrical characteristics**

Symbol	Parameter	Test conditions		Min.	Typ.	Max.	Unit
$I_R^{(1)}$	Reverse leakage current	$T_j = 25\text{ °C}$	$V_R = 800\text{ V}$	-		5	$\mu\text{A}$
		$T_j = 125\text{ °C}$		-	5	50	$\mu\text{A}$
$V_F^{(2)}$	Forward voltage drop	$T_j = 25\text{ °C}$	$I_F = 2\text{ A}$	-		1.65	V
		$T_j = 150\text{ °C}$		-	0.89	1.25	

1. Pulse test:  $t_p = 5\text{ ms}$ ,  $\delta < 2\%$

2. Pulse test:  $t_p = 380\text{ }\mu\text{s}$ ,  $\delta < 2\%$

To evaluate the conduction losses, use the following equation:

$$P = 0.5 \times I_{F(AV)} + 0.10 \times I_{F(RMS)}^2$$

For more information, please refer to the following application notes related to the power losses :


- AN604: Calculation of conduction losses in a power rectifier
- AN4021: Calculation of reverse losses on a power diode

**Table 4. Dynamic characteristics ( $T_j = 25\text{ °C}$  unless otherwise stated)**


Symbol	Parameters	Test conditions	Min.	Typ.	Max.	Unit
$t_{rr}$	Reverse recovery time	$I_F = 0.5\text{ A}$ , $I_{rr} = 0.25\text{ A}$ , $I_F = 1\text{ A}$	-	-	75	ns
$t_{fr}$	Forward recovery time	$I_F = 2\text{ A}$ , $di_F/dt = 50\text{ A}/\mu\text{s}$ , $V_{FR} = 1.1 \times V_{F(max.)}$	-	-	200	ns
$V_{FP}$	Forward recovery voltage		-	-	9	V

### 1.1 Characteristics (curves)


**Figure 1. Average forward power dissipation versus average forward current**

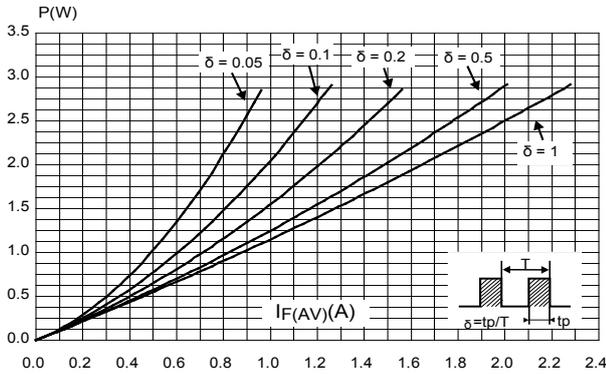


**Figure 2. Forward voltage drop versus forward current**

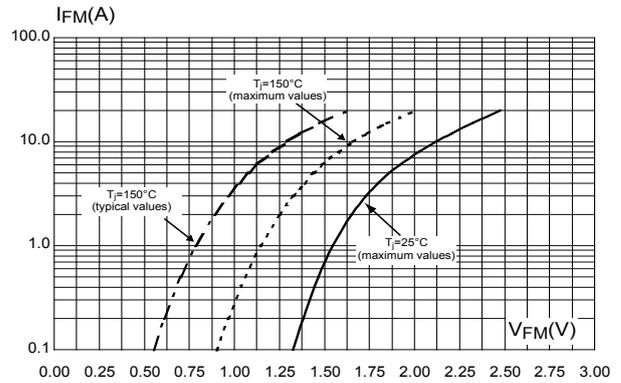


**Figure 3. Relative variation of thermal impedance junction to lead versus pulse duration (DO-15)**

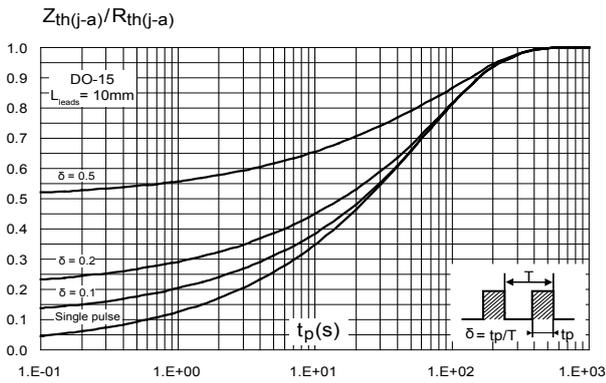


**Figure 4. Relative variation of thermal impedance junction to lead versus pulse duration (SMB)**

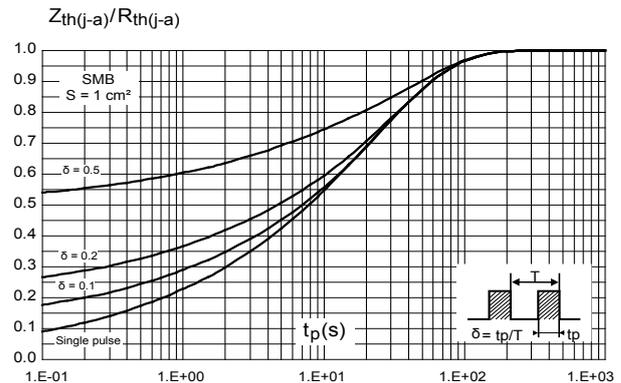

**Figure 5. Thermal resistance junction to ambient versus copper surface under each lead (typical values)**

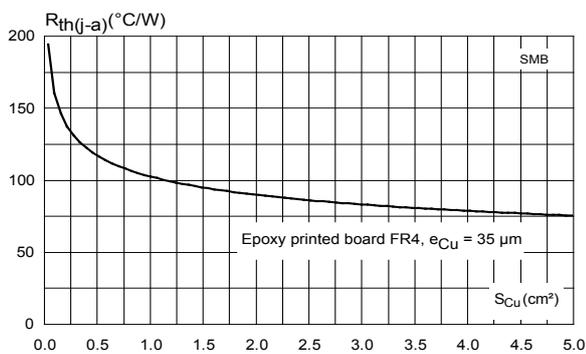

**Figure 6. Thermal resistance junction to ambient versus lead length, DO-15**

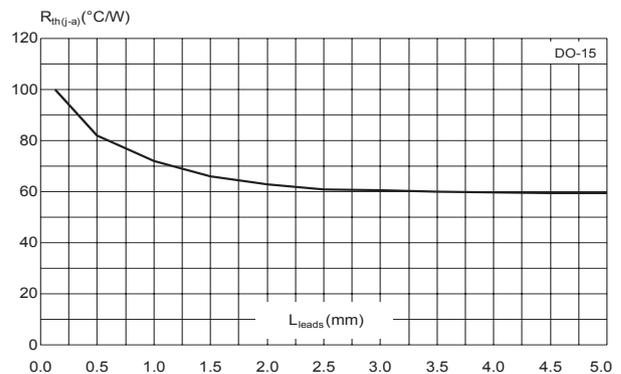


## 2 Package information

In order to meet environmental requirements, ST offers these devices in different grades of **ECOPACK** packages, depending on their level of environmental compliance. ECOPACK specifications, grade definitions and product status are available at: [www.st.com](http://www.st.com). ECOPACK is an ST trademark.

### 2.1 SMB package information

- Epoxy meets UL94, V0
- Lead-free package


Figure 7. SMB package outline

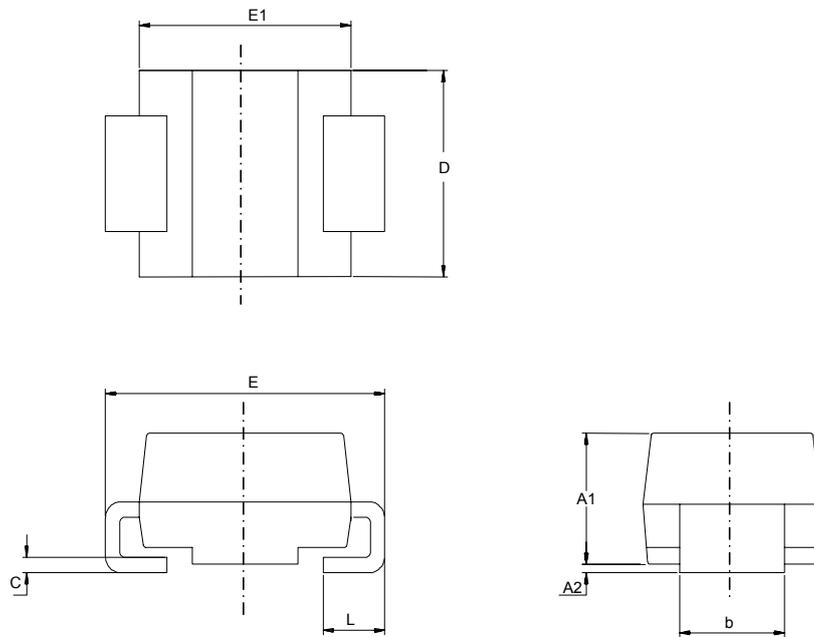

**Table 5. SMB package mechanical data**

Ref.	Dimensions			
	Millimeters		Inches (for reference only)	
	Min.	Max.	Min.	Max.
A1	1.90	2.45	0.074	0.097
A2	0.05	0.20	0.001	0.008
b	1.95	2.20	0.076	0.087
c	0.15	0.40	0.005	0.016
D	3.30	3.95	0.129	0.156
E	5.10	5.60	0.200	0.221
E1	4.05	4.60	0.159	0.182
L	0.75	1.50	0.029	0.060

**Figure 8. SMB recommended footprint**

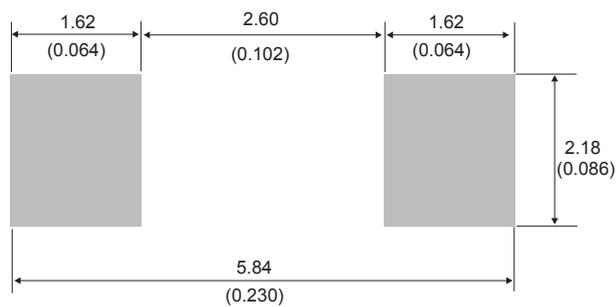

## 2.2 DO-15 package information

- Epoxy meets UL 94, V0

Figure 9. DO-15 package outline

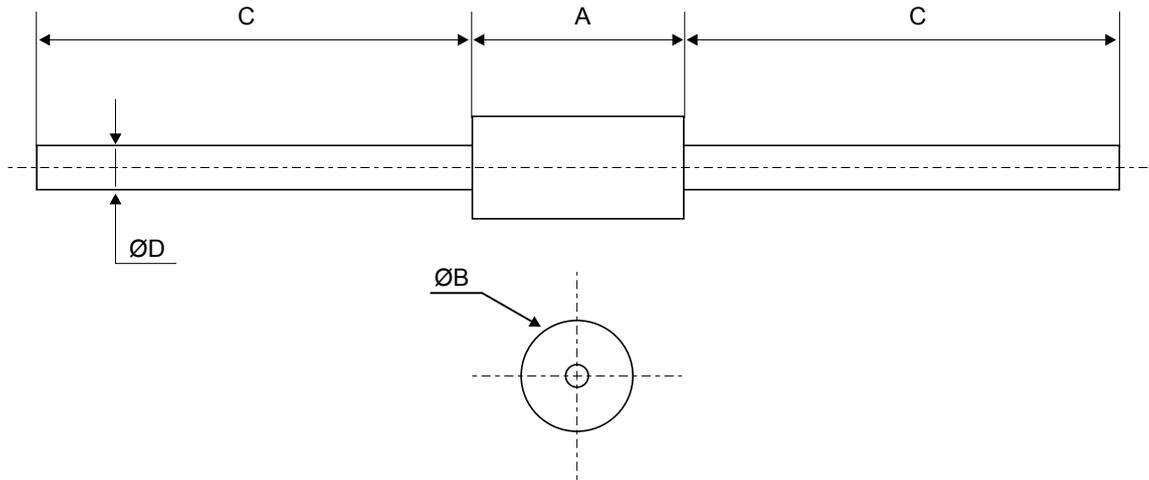


Table 6. DO-15 package mechanical data

Ref.	Dimensions					
	Millimeters			Inches (for reference only)		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	6.05	-	6.75	0.238	-	0.266
B	2.95	-	3.53	0.116	-	0.139
C	26.00	-	31.00	1.024	-	1.220
D	0.71	-	0.88	0.028	-	0.0035

### 3 Ordering information

**Table 7. Ordering information**

Order code	Marking	Package	Weight	Base qty.	Delivery mode
STTH208U	U08	SMB	0.107 g	2500	Tape and reel
STTH208	STTH208	DO-15	0.400 g	6000	Tape and reel

## Revision history

**Table 8. Document revision history**

Date	Revision	Changes
2003	1	First issue.
01-Apr-2020	2	Updated <a href="#">Figure 4</a> and <a href="#">Figure 3</a> . Minor text changes.

**IMPORTANT NOTICE – PLEASE READ CAREFULLY**

STMicroelectronics NV and its subsidiaries (“ST”) reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST’s terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers’ products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. For additional information about ST trademarks, please refer to [www.st.com/trademarks](http://www.st.com/trademarks). All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2020 STMicroelectronics – All rights reserved

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Rectifiers](#) category:*

*Click to view products by [STMicroelectronics](#) manufacturer:*

Other Similar products are found below :

[70HFR40](#) [RL252-TP](#) [150KR30A](#) [1N5397](#) [NTE5841](#) [NTE6038](#) [SCF5000](#) [1N4002G](#) [1N4005-TR](#) [JANS1N6640US](#) [481235F](#)  
[RRE02VS6SGTR](#) [067907F](#) [MS306](#) [70HF40](#) [T85HFL60S02](#) [US2JFL-TP](#) [A1N5404G-G](#) [CRS04\(T5L,TEMQ\)](#) [ACGRA4007-HF](#)  
[ACGRB207-HF](#) [CLH03\(TE16L,Q\)](#) [ACGRC307-HF](#) [ACEFC304-HF](#) [NTE6356](#) [NTE6359](#) [NTE6002](#) [NTE6023](#) [NTE6039](#) [NTE6077](#)  
[85HFR60](#) [40HFR60](#) [70HF120](#) [85HFR80](#) [D126A45C](#) [SCF7500](#) [D251N08B](#) [SCHJ22.5K](#) [SM100](#) [SCPA2](#) [SCH10000](#) [SDHD5K](#) [VS-](#)  
[12FL100S10](#) [ACGRA4001-HF](#) [D1821SH45T PR](#) [D1251S45T](#) [NTE5990](#) [NTE6358](#) [NTE6162](#) [NTE5850](#)