


Multilayer Chip Inductor for Choke– MCL-N Series

Operating Temp. : -40°C~+85°C



FEATURES

- Monolithic structure for high reliability
- Excellent solderability and high heat resistance
- No cross coupling due to magnetic shield
- High DC bias current due to developed material
- Low AC resistance, low power loss.


APPLICATIONS

- NFC output filtering and matching circuit, Power line, etc.

PRODUCT IDENTIFICATION

<u>MCL</u> ①	<u>1608</u> ②	<u>N</u> ③	<u>R16</u> ④	<u>J</u> ⑤	<u>I</u> ⑥
①	②	③	④	⑤	⑥
Type		External Dimensions (L×W) (mm)		Feature Type	
MCL	Chip Power Inductor	1005 [0402]	1.0×0.5	N	NFC
		1608 [0603]	1.6×0.8		
Nominal Inductance		Inductance Tolerance		Packing	
Example	Nominal Value	J	±5%	T	Tape & Reel
R16	0.16μH	K	±10%		
※R= decimal point		M	±20%		

SHAPE AND DIMENSIONS

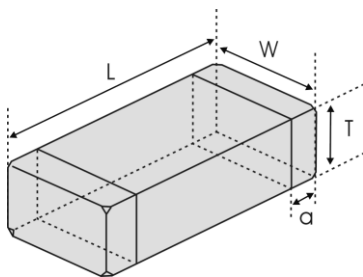

Unit: mm [inch]

Type	L	W	T	a
MCL1005N [0402]	1.0±0.15 [0.039±0.006]	0.5±0.15 [0.020±0.006]	0.5±0.15 [0.020±0.006]	0.25±0.1 [0.010±0.004]
MCL1608N [0603]	1.60±0.15 [0.063±0.006]	0.8±0.15 [0.031±0.006]	0.8±0.15 [0.031±0.006]	0.3±0.2 [0.012±0.008]

SPECIFICATIONS

MCL1005N TYPE

Part Number	Inductance	L Test Freq.	DC Resistance Max.	Min. Self-resonant Frequency	Saturation Current Typ.	Heat Rating Current Max.
Units	nH	MHz	Ω	MHz	mA	mA
Symbol	L	Freq.	DCR	S.R.F	Isat	Irms
MCL1005N77N□T	77	25	0.27	200	550	550
MCL1005N96N□T	96	25	0.35	200	500	500
MCL1005NR10□T	100	25	0.35	200	500	500
MCL1005NR11□T	110	25	0.39	200	450	450
MCL1005NR12□T	120	25	0.39	200	450	450
MCL1005NR13□T	130	25	0.39	200	450	450
MCL1005NR14□T	140	25	0.45	200	450	450
MCL1005NR15□T	150	25	0.45	200	450	450
MCL1005NR16□T	160	25	0.52	200	550	400
MCL1005NR18□T	180	25	0.58	200	370	400
MCL1005NR20□T	200	25	0.58	200	370	400
MCL1005NR22□T	220	25	0.58	180	370	400
MCL1005NR27□T	270	25	0.65	180	350	350
MCL1005NR33□T	330	25	0.65	120	300	350
MCL1005NR39□T	390	25	0.97	120	300	300
MCL1005NR47□T	470	25	0.97	120	250	300
MCL1005NR56□T	560	25	1.40	120	250	250

MCL1608N TYPE

Part Number	Inductance	L Test Freq.	DC Resistance Max.	Min. Self-resonant Frequency	Saturation Current Typ.	Heat Rating Current Max.
Units	nH	MHz	Ω	MHz	mA	mA
Symbol	L	Freq.	DCR	S.R.F	Isat	Irms
MCL1608N77N□T	77	25	0.11	200	1100	1100
MCL1608N85N□T	85	25	0.11	200	1100	1100
MCL1608NR10□T	100	25	0.12	200	1000	1000
MCL1608NR12□T	120	25	0.14	200	1000	800
MCL1608NR16□T	160	25	0.156	200	1100	700
MCL1608NR20□T	200	25	0.22	200	700	650
MCL1608NR21□T	210	25	0.26	200	700	600
MCL1608NR22□T	220	25	0.26	200	700	600
MCL1608NR27□T	270	25	0.286	200	650	550
MCL1608NR33□T	330	25	0.312	180	650	500
MCL1608NR39□T	390	25	0.36	180	600	450
MCL1608NR47□T	470	25	0.494	120	600	400
MCL1608NR56□T	560	25	0.52	120	550	400
MCL1608NR65□T	650	25	0.65	100	450	350
MCL1608NR82□T	820	25	0.75	80	400	300



※Isat: DC current at which the inductance drops approximate 10% from its value without current;

※Irms : DC current that causes the temperature rise ($\Delta T = 25^{\circ}\text{C}$) from 20°C ambient.



※□: Please specify the inductance tolerance code (J=±5%,K=±10%,M=±20%).

TYPICAL ELECTRICAL CHARACTERISTICS



Inductance vs. Frequency Characteristics

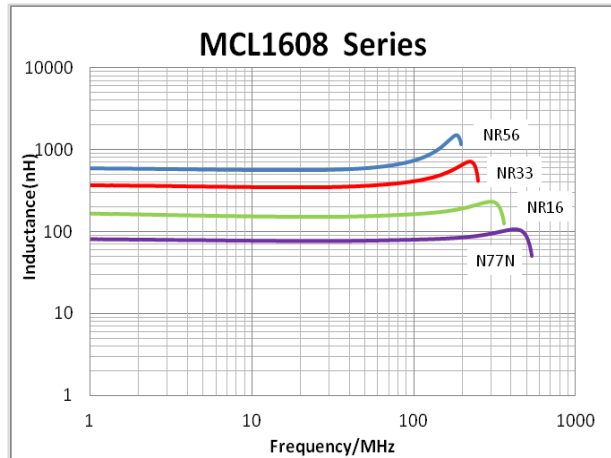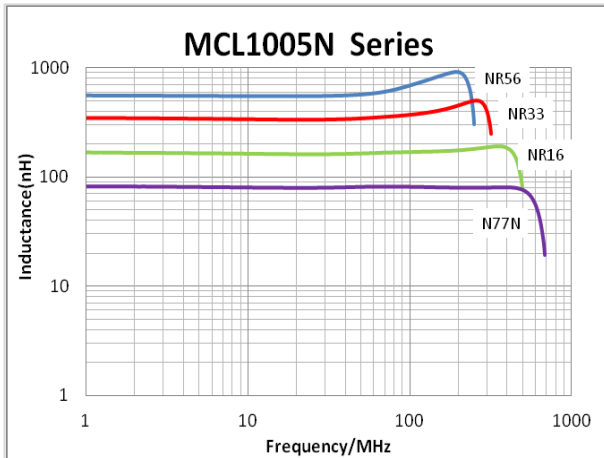

Impedance vs. Frequency Characteristics

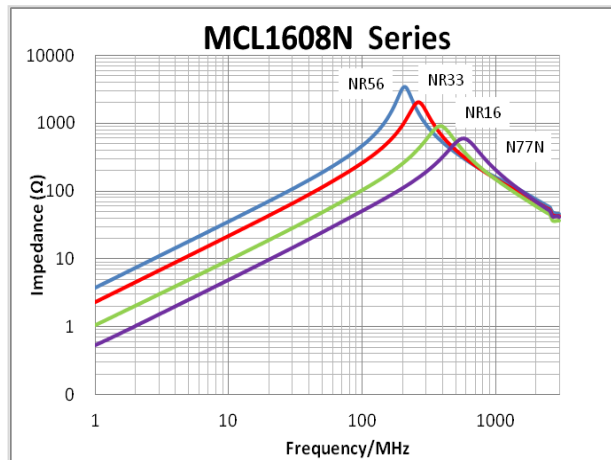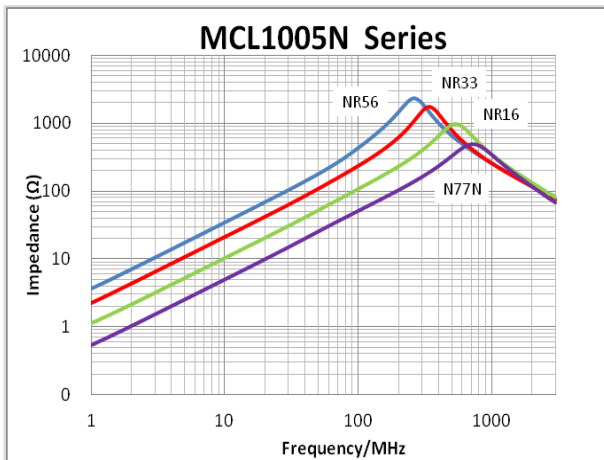

Inductance vs. DC Current Characteristics

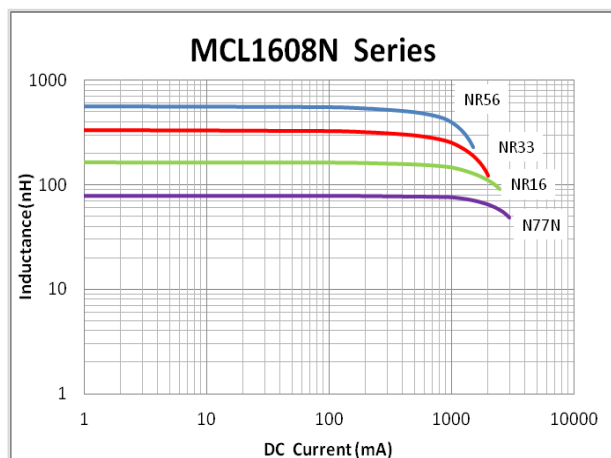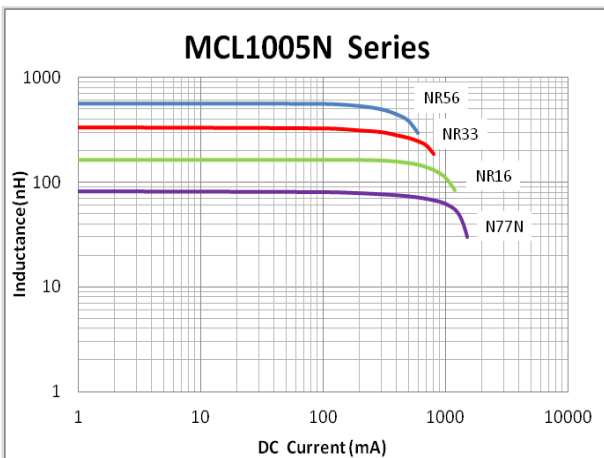

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Inductors](#) category:

Click to view products by [Sunlord](#) manufacturer:

Other Similar products are found below :

[CR32NP-151KC](#) [CR32NP-180KC](#) [CR32NP-181KC](#) [CR32NP-1R5MC](#) [CR32NP-390KC](#) [CR32NP-3R9MC](#) [CR32NP-680KC](#) [CR32NP-820KC](#) [CR32NP-8R2MC](#) [CR43NP-390KC](#) [CR43NP-560KC](#) [CR43NP-680KC](#) [CR54NP-181KC](#) [CR54NP-470LC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#) [70F224AI](#) [MGDQ4-00004-P](#) [MHL1ECTTP18NJ](#) [MHQ1005P10NJ](#) [MHQ1005P1N0S](#) [MHQ1005P2N4S](#) [MHQ1005P3N6S](#) [MHQ1005P5N1S](#) [MHQ1005P8N2J](#) [PE-51506NL](#) [PE-53601NL](#) [PE-53602NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#) [9220-20](#) [9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#) [1206CS-471XJ](#) [HC2LP-R47-R](#) [HC2-R47-R](#) [HC3-2R2-R](#) [HCF1305-3R3-R](#) [1206CS-151XG](#) [RCH664NP-140L](#) [RCH664NP-4R7M](#) [RCH8011NP-221L](#) [RCP1317NP-332L](#) [RCP1317NP-391L](#) [RCR1010NP-470M](#)