

Country of Origin : China  
 Operating Temperature : 0~40 [°C]  
 Dimension : 61 × 61 × 29 [mm]  
 Efficiency level (ErP) : VI



**GREEN MODE**      **RoHS**



**Specifications**


Model	Voltage DC/Loading [V/A]	Max. Power [W]	Ripple / Noise [mV] p-p	Connector
SYS1621-TYPE C 60-T2	5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/3A	60	250	USB-C

**Features:**

GaN technology Power Supply  
 Auto-detect the charging voltage and current for Type C and ios devices.  
 Meet PD3.0 requirement rules  
 The Programmable Power Supply (PPS) output is 3.3-21V / 3.0A max (60W max)  
 USB-C desktop charger T2  
 Output connector: Regulated Output With Low Ripple Noise | Safety Agency Requirements and EMI/EMS Certified  
 Private Label Marking Available | 2 Years Warranty

<b>INPUT   OUTPUT</b>	<b>Voltage</b>	90-264VAC
	<b>Current</b>	1.5A rms max   At AC low line input and DC output full load
	<b>Inrush Current</b>	0
	<b>Power consumption</b>	0.21W max. with output no load at 115VAC/230VAC input
	<b>Efficiency</b>	Meet ERP level VI
	<b>Hold up time</b>	0
	<b>Turn delay</b>	5000mS max.   At AC low line input @ output full load.
	<b>Ripple noise</b>	250mV
	<b>Burn-in</b>	2 Hour Full Load
<b>PROTECTION</b>	<b>Over current Short protection</b>	Fold back   Auto recovery when abnormal circuit faults remove.
	<b>Over Voltage</b>	Auto recovery
	<b>Input protection</b>	3.15A/250V Fuse   The power supply shall be protected against power line surges and any abnormal condition
	<b>Protection class</b>	Class II
<b>SAFETY</b>	<b>CE EMC</b>	2014/30/EU
	<b>CE LVD</b>	2014/35/EU EN IEC 62368-1:2020+A11:2020
	<b>Safety approvals</b>	GS   cTUVus   FCC   CE   CB   SAA+RCM   PSE   UKCA
	<b>Dielectric Strength (Hi-pot)</b>	IEC 320 2pin primary to secondary 4000Vdc 10mA 1min
	<b>Leakage current</b>	0.25 mA max.
<b>ENVIRONMENTAL</b>	<b>Temperature</b>	Operating: -5~35°C / Storage: -20~85°C
	<b>Humidity</b>	Operating: 8%~90%RH / Storage:5%~95% RH
	<b>Cooling</b>	Natural Convection Cooling
<b>OTHER</b>	<b>MTBF</b>	MTBF shall be least 50,000 hours at 25°C (MIL-HDBK-217F)
	<b>Weight</b>	0
	<b>Dimension</b>	61x61x29 mm
	<b>Packing</b>	100 pcs   1 box

**Mechanical case specification:**

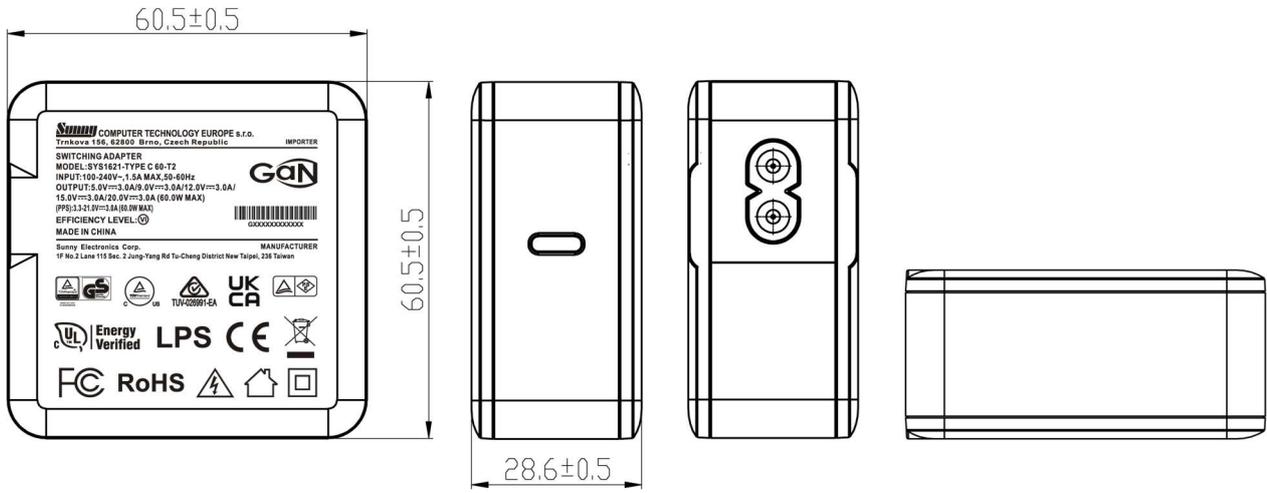

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Desktop AC Adapters](#) category:*

*Click to view products by [Sunny](#) manufacturer:*

Other Similar products are found below :

[SWA-1202](#) [SWA-1501](#) [212A2220](#) [820A4080G](#) [825A0057-03](#) [SWA-1704W](#) [SDI18-12-UC-P6](#) [TWN4 MIFARE NFC USB ADAPTE](#)  
[96PSA-A36W12R1-3](#) [NPB-750-24](#) [96PSA-A60W12V1-4](#) [96PSA-A60W12W7-3](#) [96PSA-A100W18D4-M3](#) [5130](#) [TR70MA480-01E03 VI](#)  
[52408](#) [52398](#) [52415](#) [51733](#) [52410](#) [POSC12300D3-C8](#) [SYS1621-PD60W-T2](#) [51773](#) [50760](#) [CPSUNOTAKY-07056](#) [CPSUNOTAKY-07058](#)  
[CPSUNOTAKY-07168](#) [CPSUNOTAKY-07169](#) [CPSUNOTAKY-07234](#) [CPSUNOTAKY-07236](#) [CPSUNOTAKY-07288](#) [CPSUNOTAKY-](#)  
[07342](#) [CPSUNOTAKY-07387](#) [CPSUNOTAKY-07388](#) [TE30A0503F01](#) [TE30A4803F01](#) [TE40A2403F01](#) [TE40A2403N01](#) [ME30A1803N01](#)  
[ME40A1203N01](#) [ME40A2403N01](#) [MENB1040A0503F01](#) [125530040F](#) [1255300611](#) [ME30A0503F01](#) [ME30A1203F01](#) [ME30A1803F01](#)  
[ME30A2403F01](#) [ME40A1803N01](#) [MENB1010A1203F01](#)