



A Tallysman Accutenna® TW4721/TW4722 Wideband Dual Feed GPS/GLONASS/BeiDou/Galileo Antenna



The TW4721/TW4722 is a compact, wideband GNSS antenna that provides accurate reception for all upper L- band GPS, GLONASS, Beidou, and Galileo signals (L1, G1, B1, B1 BOC, B1-2, E1) and associated augmentation signals (WAAS, EGNOS and MSAS SBAS). This antenna employs Tallysman's patented *Accutenna* technology.

The TW4721/TW4722 features a novel 25mm dual feed wideband patch element that, in sharp contrast with its competitors, provides a truly circularly polarized response, with a typical axial ratio of less than 2dB over the full bandwidth. This provides a more linear carrier phase response and substantially improved multipath rejection for higher precision applications.

The TW4722 is the pre-filtered version of the TW1721. The pre-filter provides protection from near frequency or strong harmonic interfering signals.

The TW4721/TW4722 is the smallest, lightest, wideband GNSS antenna available. It is housing in a compact IP67 magnetic or adhesive mount enclosure and is available with a wide range of connector options and custom coax cable lengths.

The antenna can be ordered without the magnet. In such cases, the magnet is replaced with a plastic plug to provide a smooth under surface, with the option of ordering it with or without 1.1 mm double-sided VHB tape on the bottom.

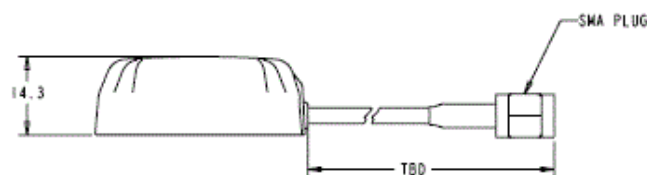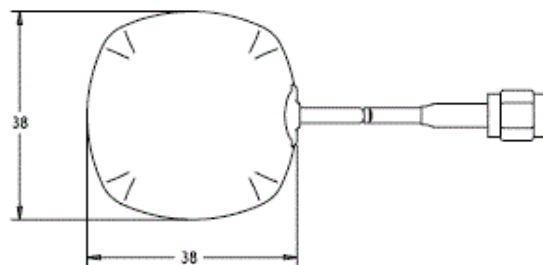

Applications

- Cost Sensitive Mission Critical Positioning
- UAV / UAS
- Covert surveillance
- Fleet Management & Asset Tracking

Features

- Dual feed patch element
- Axial ratio: 2 dB typ.
- Low noise LNA: 1 dB
- High rejection mid-section SAW filter
- High gain: 26 dB typ.
- Wide voltage input range: 1.8 to 16 VDC
- IP67 weather proof housing
- Low Power: 10mA typ. over supply range.

Benefits

- Greatly enhanced multipath rejection
- improved GNSS reliability
- Excellent signal to noise ratio
- RoHS compliant
- Ideal for harsh environments
- Excellent out of band signal rejection



TW4721/TW4722 Wideband Dual Feed GPS/GLONASS/BeiDou/Galileo Antenna Specifications

At; Vcc = 3V, over full bandwidth, T=25°C

Antenna

Architecture	Wideband Dual Feed Patch Element
2 dB radiated power bandwidth (RHCP)	47 MHz
Antenna Gain (with 100mm ground plane)	4.5 dBic @ 1582.5MHz
Axial Ratio over full bandwidth	<2dB typ. 3dB max.
Polarization	RHCP

Electrical

Architecture	Dual Feed Patch -> Hybrid->LNA stage 1 -> SAW filter-> LNA stage 2		
Filtered LNA Frequency Bandwidth	1559 to 1606 MHz		
Gain (1559 MHz to 1606MHz)	TW4721: 25dB min, 29dB max TW4722: 23dB min, 27dB max		
Gain flatness	+/- 2dB, 1559 MHz to 1606MHz		
Out-of-Band Rejection	TW4721	TW4722	
	<1500MHz	>40dB	>57dB
	<1525MHz	>45dB	>62dB
	>1630MHz	>45dB	>50dB
VSWR (at LNA output)	<1.5:1 typ. 1.8:1 max		
Noise Figure	TW4721: 1.0dB typ. TW4722: 3.0dB typ.		
Supply Voltage Range (over coaxial cable)	+1.8VDC to 16VDC nominal (12VDC recommended maximum)		
Supply Current	10mA typ.		
ESD Circuit Protection	15KV air discharge		

Mechanicals & Environmental

Mechanical Size	38mm x 38mm dia. x 14.3mm High
Cable	RG174
Operating Temp. Range	-40°C to +85°C
Enclosure	Radome and base: EXL9330
Weight	50gm (Enclosure + SMA connector 34gm, cable 0.31gm/cm)
Attachment Method	Magnetic or Adhesive
Environmental	IP67, REACH and RoHS compliant
Shock	Vertical axis: 50G, other axes: 30G
Vibration	3 axis, sweep = 15 min, 10 to 200Hz sweep: 3G
Warranty	One year, parts and labour

Ordering Information

TW4721 – GPS/GLONASS/BeiDou/Galileo Antenna	33-4721-xx-yyyy
TW4722 - GPS/GLONASS/BeiDou/Galileo Antenna	33-4722-xx-yyyy
xx = connector type yyyy = cable length in mm	

Please refer to the Ordering Guide (<http://www.tallysman.com/wp-content/uploads/Current-Ordering-Guide.pdf>) for the current and complete list of available radomes and connectors.



An ISO 9001:2015
Certified Company

Tel 613 591 3131

36 Steacie Drive Ottawa ON K2K 2A9 Canada
Fax 613 591 3121 sales@tallysman.com

The information provided herein is intended as a guide only and is subject to change without notice. This document is not to be regarded as a guarantee of performance. Tallysman Wireless Inc. hereby disclaims any or all warranties and liabilities of any kind. © 2015 Tallysman Wireless Inc. All rights reserved. Rev 1.9

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Antennas](#) category:

Click to view products by [Tallysman](#) manufacturer:

Other Similar products are found below :

[108-00014-50](#) [66089-2406](#) [A09-F8NF-M](#) [RGFRA1903041A1T](#) [108-00016-050](#) [W1049B090](#) [WTL2449CQ1-FRSMM](#) [CPL9C](#) [0600-00060](#)
[GD53-25](#) [S9025PLSMF](#) [GPSCPMM00](#) [ANTDOM-05-01-WPM](#) [ANT-WP868SMA-Y](#) [CBNC58](#) [ABFT](#) [LP800NMOW](#) [NMOQ88C](#)
[NMOQB](#) [NMOQC](#) [ANT-GSMGPSPUKS](#) [60210](#) [60140](#) [ANT-8WPIG-UFL](#) [A21H0](#) [29000863](#) [29000848](#) [955179003](#) [22100003](#) [DL-T022-](#)
[2.4G](#) [DL-T023-4G](#) [T1-915M](#) [DL-T021-2.4GW](#) [DL-T021-2.4G](#) [BWGNSCNX16-6B1Y2L120](#) [BWGNSCNX15-15B1Y4L120](#) [DL-T023-4GW](#)
[J008-GSM](#) [3N0401LG-021](#) [KHA\(RG1.13\)-TX90B-IPEX](#) [KH-GPS181804-WY](#) [TX5800-JZ-5](#) [3E0402BK-004](#) [3E0301BK-006](#) [PRO-OB-440](#)
[ACR0301U](#) [BWGNSCNX9-9B1Y4L120](#) [BWGPSCNX20-20B1Y4L120](#) [DL-J023-5GB](#) [3N0101BK-017](#)