



# TAOGLAS®



# Datasheet

## Magma X

**Part No:**

**AA.175.B.301111**

## Description

MagmaX2 Active GPS L1/L2 Magnetic Mount Antenna

## Features:

Magnetic Mount Antenna

Covers GPS L1 / L2 Bands along with BeiDou B1I and GLONASS G1

Excellent Out-Of-Band Rejection

Low Noise Figure

Cable: 3m of RG-174

Connector: SMA(M)

IP67 Waterproof Rated Enclosure

Dimensions: 49.8 x 52.4 x 17.1mm

RoHS & Reach Compliant

|           |                                |           |
|-----------|--------------------------------|-----------|
| <b>1.</b> | <b>Introduction</b>            | <b>3</b>  |
| <b>2.</b> | <b>Specification</b>           | <b>4</b>  |
| <b>3.</b> | <b>Mechanical Drawing</b>      | <b>7</b>  |
| <b>4.</b> | <b>Packaging</b>               | <b>8</b>  |
| <b>5.</b> | <b>Antenna Characteristics</b> | <b>9</b>  |
| <b>6.</b> | <b>Radiation Patterns</b>      | <b>13</b> |
| <b>7.</b> | <b>LNA Characteristics</b>     | <b>18</b> |
| <hr/>     |                                |           |
|           | Changelog                      | 23        |

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein. Reproduction, use or disclosure to third parties without express permission is strictly prohibited.



## 1. Introduction



The Taoglas **MagmaX2 AA.175.B** is an external, IP67 rated, magnetic mount, high-performance multiband GNSS antenna. Utilizing an internal, active stacked patch, the GNSS antenna supports both L1 and L2 bands. It is an economical, after market solution for the highest accuracy centimeter-level tracking applications.

Typical applications include:

- UAVs and Robotics
- Transportation and Autonomous Vehicles
- Marine and Agriculture
- Navigation

This compact antenna exhibits excellent radiation patterns on both L1 and L2 bands and with a low noise figure to preserve signal quality, which helps minimize time to first fix. It also features excellent out-of-band rejection to prevent out-of-band signals from overdriving or damaging its LNAs. The AA.175 features very tight Phase Centre Offset (PSO) at just  $\pm 2\text{cm}$  at the L1 Band and  $\pm 5\text{cm}$  at the L2. The precision of antenna phase center directly affects the accuracy of GNSS positioning systems and can ensure that the accuracy of the receiver can really achieve cm-level accuracy.


This antenna has been tuned and tested on a 70 x 70 mm ground plane, working at GPS L1 (1575.42MHz), GPS L2 (1227.6MHz) and GLONASS L1(1602MHz) with a 2 stage LNA ensuring good signal strength. It can operate with an input voltage ranging from 1.8 to 5 volts.

The enclosure is made from robust ABS material and is IP67 rated to endure the most challenging of environments. It is supplied with 3m RG-164 cable and SMA(M) connector, both of which can be customized to suit your application.

Contact your regional Taoglas customer support team to request these services or additional support to integrate and test this antenna's performance in your device.

## 2. Specification

| GNSS Frequency Bands |                        |                           |                    |                    |                   |
|----------------------|------------------------|---------------------------|--------------------|--------------------|-------------------|
| GPS                  | L1<br>1575.42 MHz      | L2<br>1227.6 MHz          | L5<br>1176.45 MHz  |                    |                   |
|                      | ■                      | ■                         | □                  |                    |                   |
| GLONASS              | G1<br>1602 MHz         | G2<br>1248 MHz            | G3<br>1207 MHz     |                    |                   |
|                      | ■                      | □                         | □                  |                    |                   |
| Galileo              | E1<br>1575.24 MHz      | E5a<br>1176.45 MHz        | E5b<br>1201.5 MHz  | E6<br>1278.75 MHz  |                   |
|                      | ■                      | □                         | □                  | □                  |                   |
| BeiDou               | B1C<br>1575.42 MHz     | B1I<br>1561 MHz           | B2a<br>1176.45 MHz | B2b<br>1207.14 MHz | B3<br>1268.52 MHz |
|                      | ■                      | ■                         | □                  | □                  | □                 |
| L-Band               | L-Band<br>1542 MHz     |                           |                    |                    |                   |
|                      | □                      |                           |                    |                    |                   |
| QZSS (Regional)      | L1<br>1575.42 MHz      | L2C<br>1227.6 MHz         | L5<br>1176.45 MHz  | L6<br>1278.75e6    |                   |
|                      | ■                      | ■                         | □                  | □                  |                   |
| IRNSS (Regional)     | L5<br>1176.45 MHz      |                           |                    |                    |                   |
|                      | □                      |                           |                    |                    |                   |
| SBAS                 | 1/E1/B1<br>1575.42 MHz | L5/B2a/E5a<br>1176.45 MHz | G1<br>1602 MHz     | G2<br>1248 MHz     | G3<br>1207 MHz    |
|                      | ■                      | □                         | ■                  | □                  | □                 |

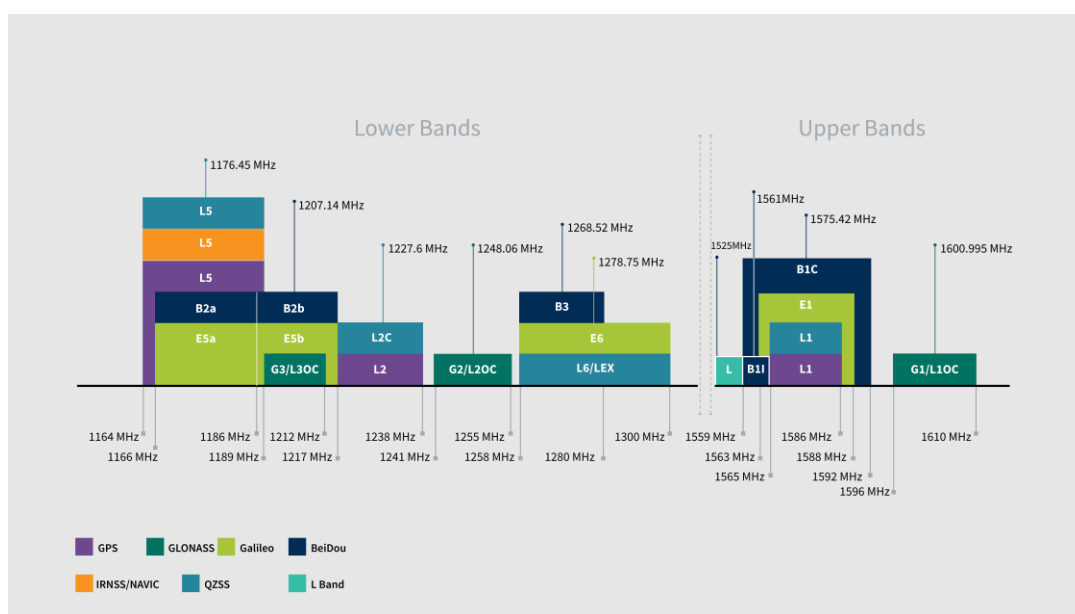

GNSS Bands and Constellations


| GNSS Electrical                   |               |                |                  |                    |
|-----------------------------------|---------------|----------------|------------------|--------------------|
| Frequency (MHz)                   | L2<br>1227MHz | B1I<br>1561MHz | L1<br>1575.42MHz | G1/L1OC<br>1602MHz |
|                                   | 1217-1238 MHz | 1559-1565 MHz  | 1565-1586 MHz    | 1596-1610 MHz      |
| VSWR                              | 3:1           | 2:1            | 4:1              | 4:1                |
| Passive Antenna Efficiency (%)    | 66.4          | 45.88          | 46.04            | 49.63              |
| Passive Antenna Peak Gain (dBi)   | 1.27          | 0.04           | 0.04             | 0.06               |
| Axial Ratio (dB)                  | 11.36         | 15.41          | 23.14            | 12.79              |
| PCO x (cm)                        | 1.68          | 0.94           | 1.55             | -0.03              |
| PCO y (cm)                        | 2.62          | 2.47           | 3.1              | 5.37               |
| PCV (cm)                          | 0.02          | 0.03           | 0.03             | 0.01               |
| Polarization                      | RHCP          |                |                  |                    |
| Impedance                         | 50 Ω          |                |                  |                    |
| *Tested on a 30x30cm Ground Plane |               |                |                  |                    |

| LNA and Filter Electrical Properties |                                                |                |                  |                    |
|--------------------------------------|------------------------------------------------|----------------|------------------|--------------------|
| Frequency (MHz)                      | L2<br>1227MHz                                  | B1I<br>1561MHz | L1<br>1575.42MHz | G1/L1OC<br>1602MHz |
|                                      | 1217-1238 MHz                                  | 1559-1565 MHz  | 1565-1586 MHz    | 1596-1610 MHz      |
| Gain (dB)                            | 28.03                                          | 27.32          | 28               | 26.8               |
| Noise (dB)                           | 3.11                                           | 3.8            | 3.26             | 3.88               |
| Group delay (ns)                     | 20.35                                          | 29.67          | 24.62            | 26.22              |
| Input Voltage(V)                     | + 1.8 to 5.5                                   |                |                  |                    |
| Current Consumption (mA)             | 5 $\pm$ 2                                      |                |                  |                    |
| Out of Band Rejection                | > 45dB @ <1GHz and > 60dB @ 1.7~6GHz           |                |                  |                    |
| ESD Protection (IEC61000-4-2)        | $\pm$ 30 kV air / $\pm$ 20Kv contact discharge |                |                  |                    |

| Mechanical          |                                                                                      |
|---------------------|--------------------------------------------------------------------------------------|
| Housing Dimensions  | 49.8 x 52.4 x 17.1mm                                                                 |
| Housing Material    | ABS                                                                                  |
| Cable               | 3m RG-174 (Customizable)                                                             |
| Connector           | SMA(M) (Customizable)                                                                |
| Waterproof          | IP67                                                                                 |
| Weight              | 98g                                                                                  |
| Magnetic Pull Force | Pull horizontal max pull force(kgf): 0.52<br>Pull vertical max pull force(kgf): 0.48 |

| Environmental         |                            |
|-----------------------|----------------------------|
| Operation Temperature | -40°C ~ +85°C              |
| Storage Temperature   | -40°C ~ +90°C              |
| Humidity              | Non-condensing 65°C 95% RH |


### 3. Mechanical Drawing

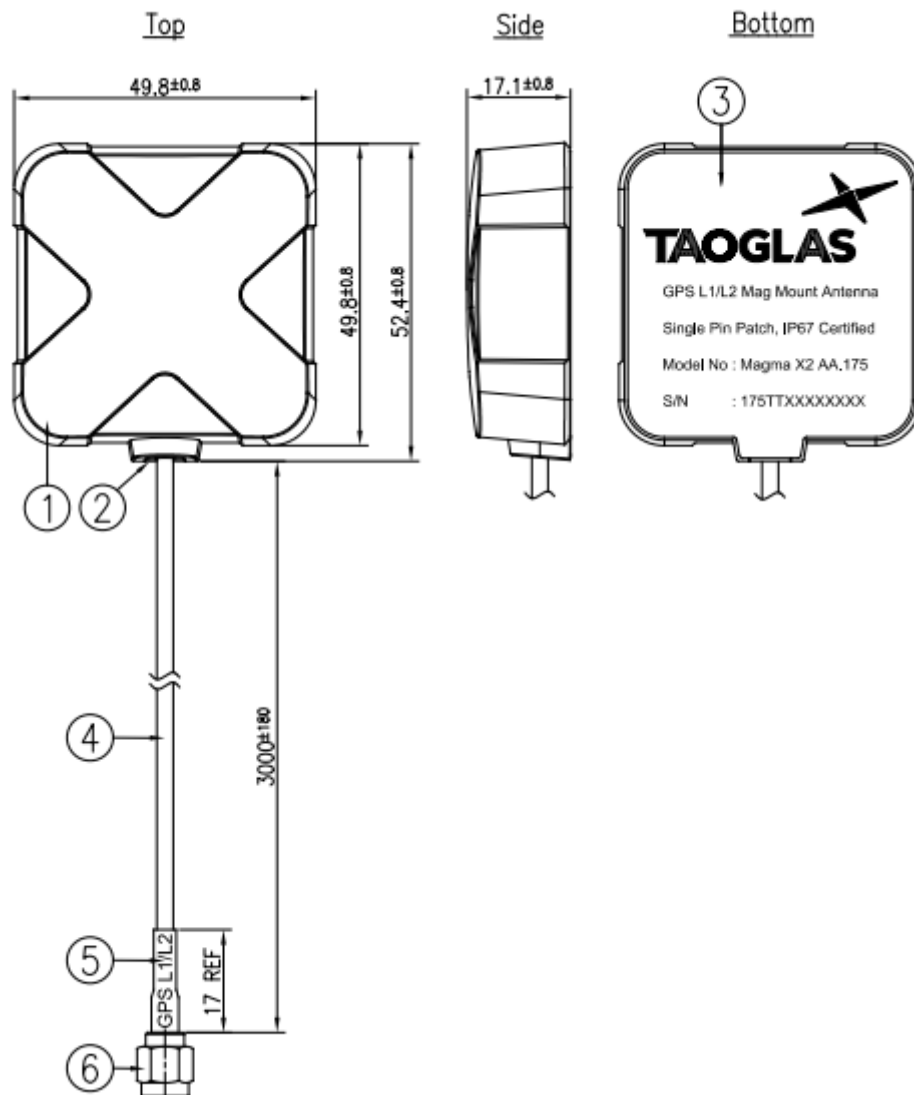

|   | Name                         | Material | Finish               | QTY |
|---|------------------------------|----------|----------------------|-----|
| 1 | Top Housing                  | ABS      | Black                | 1   |
| 2 | Bottom Housing               | ABS      | Black                | 1   |
| 3 | Sticker Bottom               | PET      | Silver               | 1   |
| 4 | RG174 Coaxial Cable          | PVC      | Black                | 1   |
| 5 | Heat Shrink Tube (GPS L1/L2) | PE       | Blue Tube/White Text | 1   |
| 6 | SMA(M)ST                     | Brass    | Au Plated            | 1   |

## 4. Packaging

1 pcs AA.175.B.301111 per PE Bag  
Bag Dimensions: 100x230mm  
Weight: 94g



10 pcs AA.175.B.301111 per Large PE Bag  
Bag Dimensions: 220x460mm  
Weight: 0.97Kg




100pcs AA.175.B.301111 per Carton  
Carton Dimensions-370 x 370 x 300mm  
Weight: 10.5Kg




## 5. Antenna Characteristics


### 5.1 Return Loss

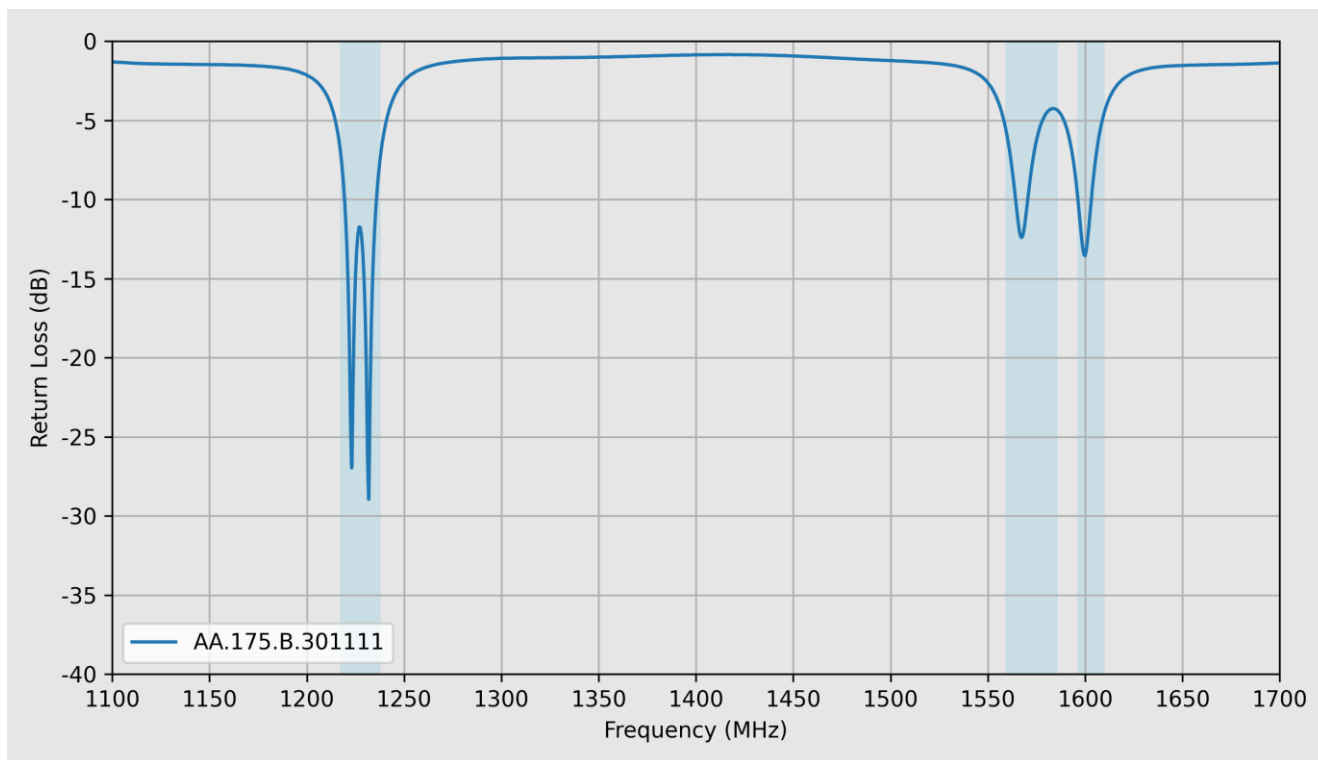


### 5.2 VSWR

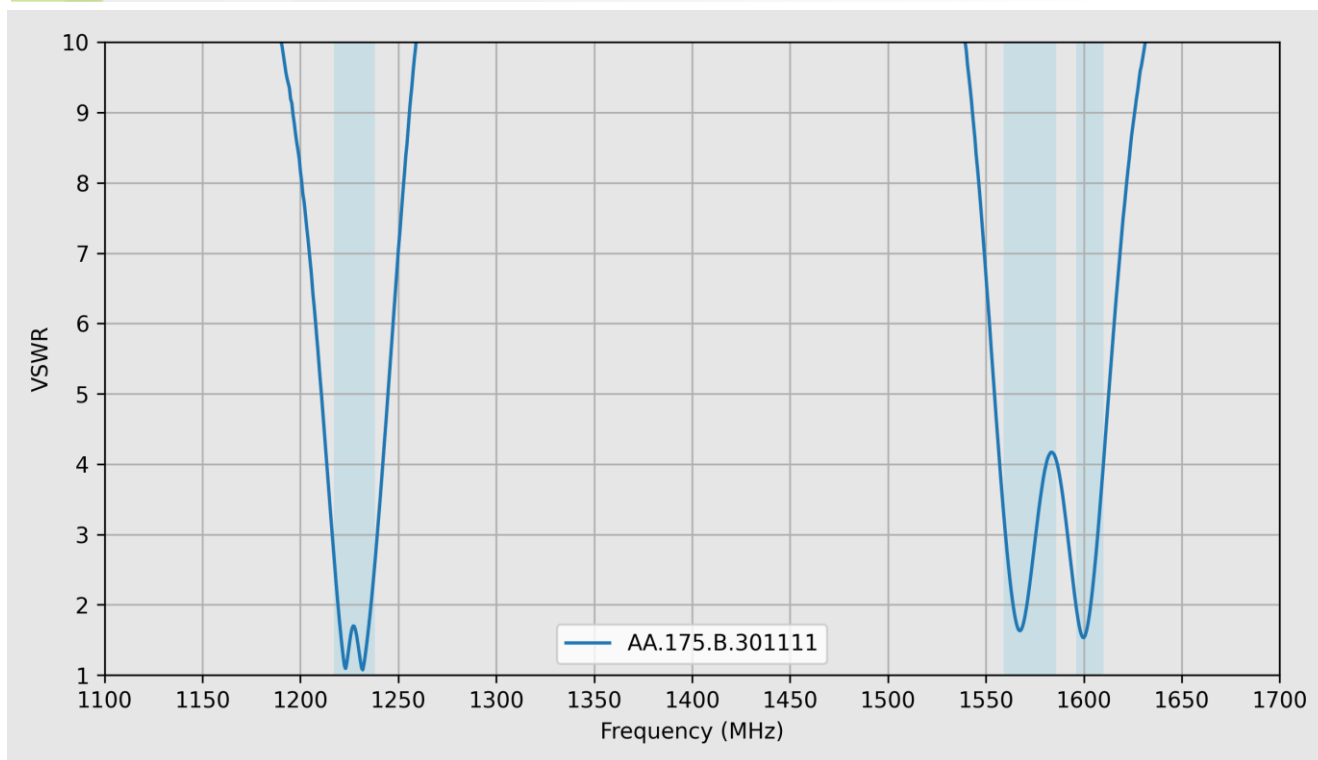


### 5.3 Efficiency

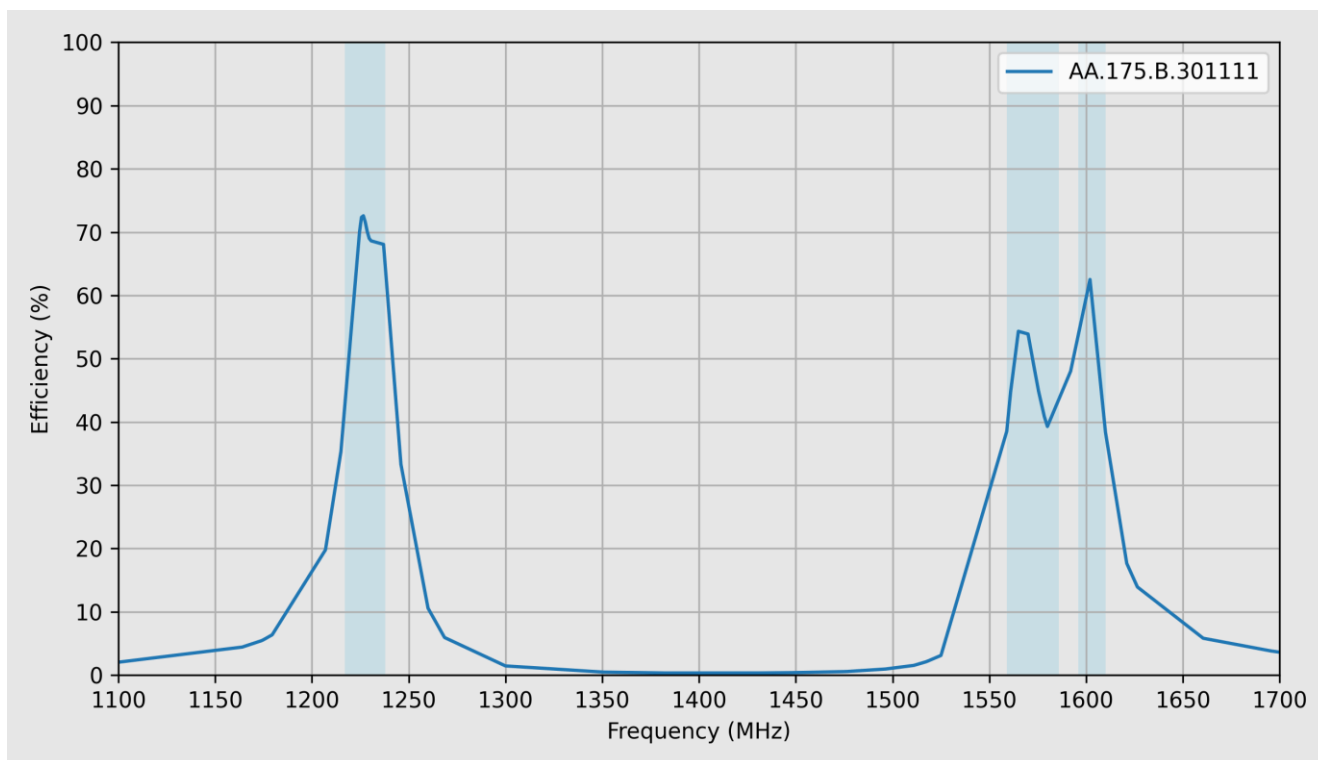


### 5.4 Average Gain

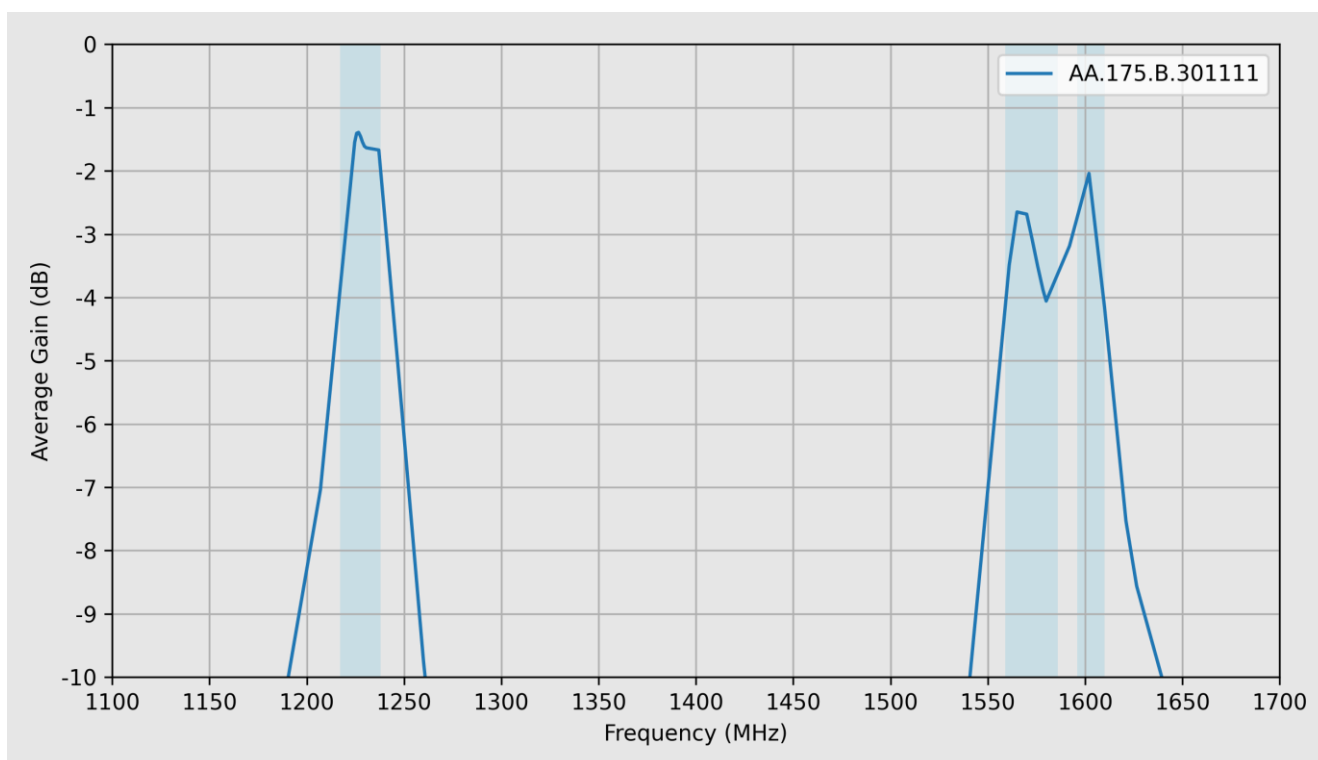


## 5.5 Peak Gain

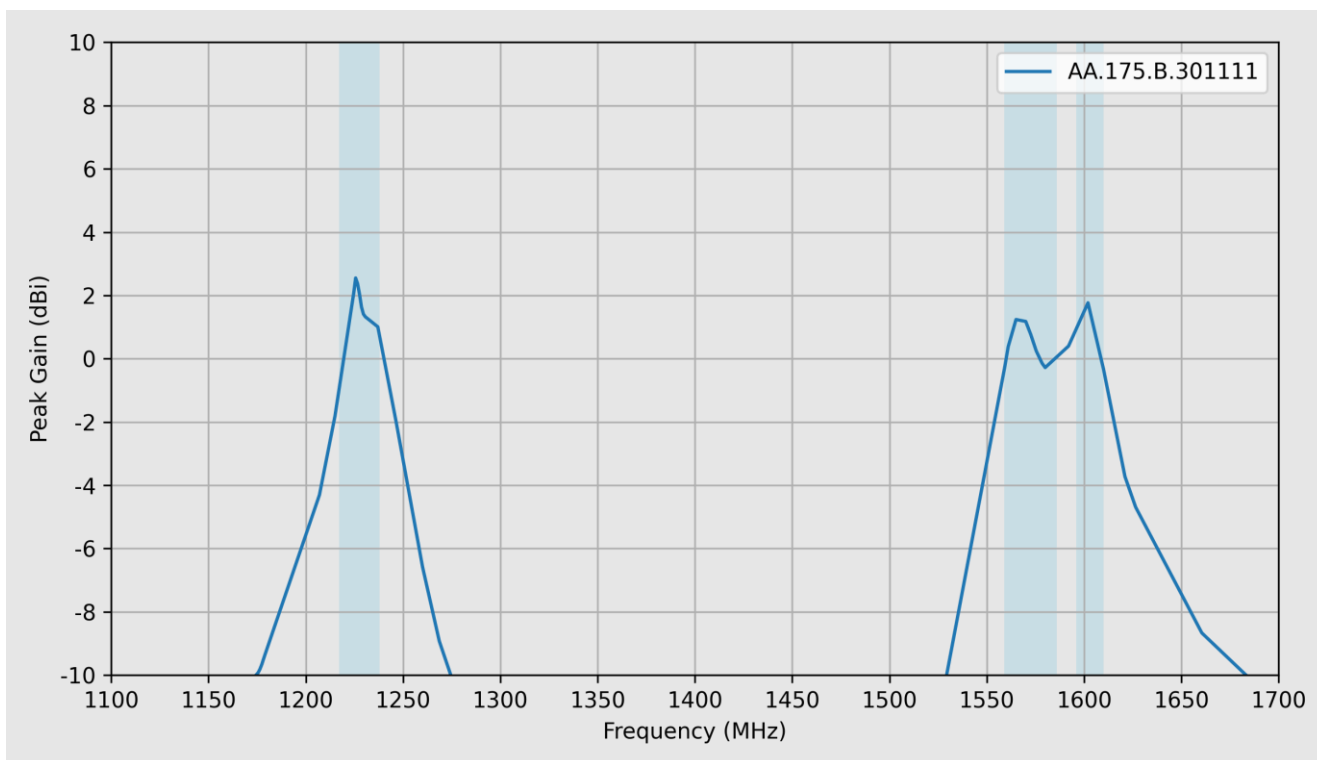


## 5.6 Axial Ratio

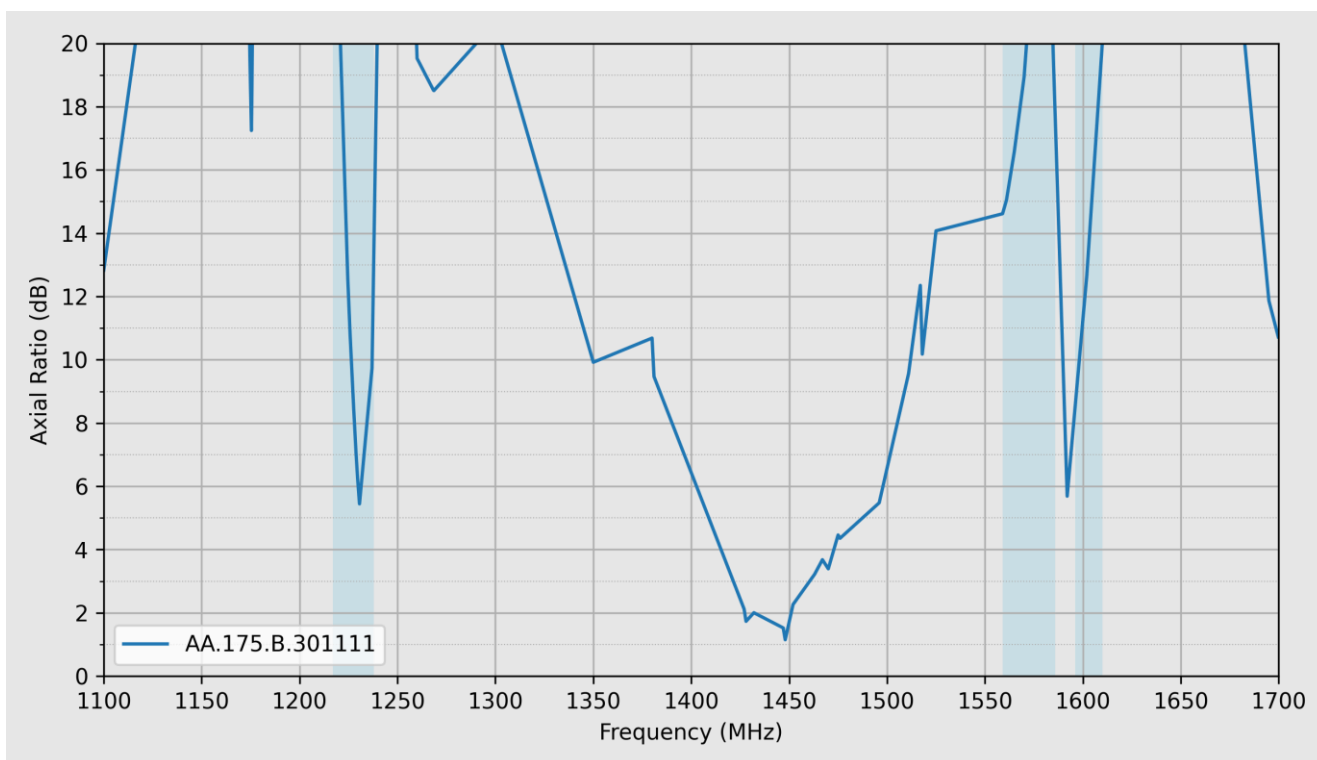

## 5.7 PCO

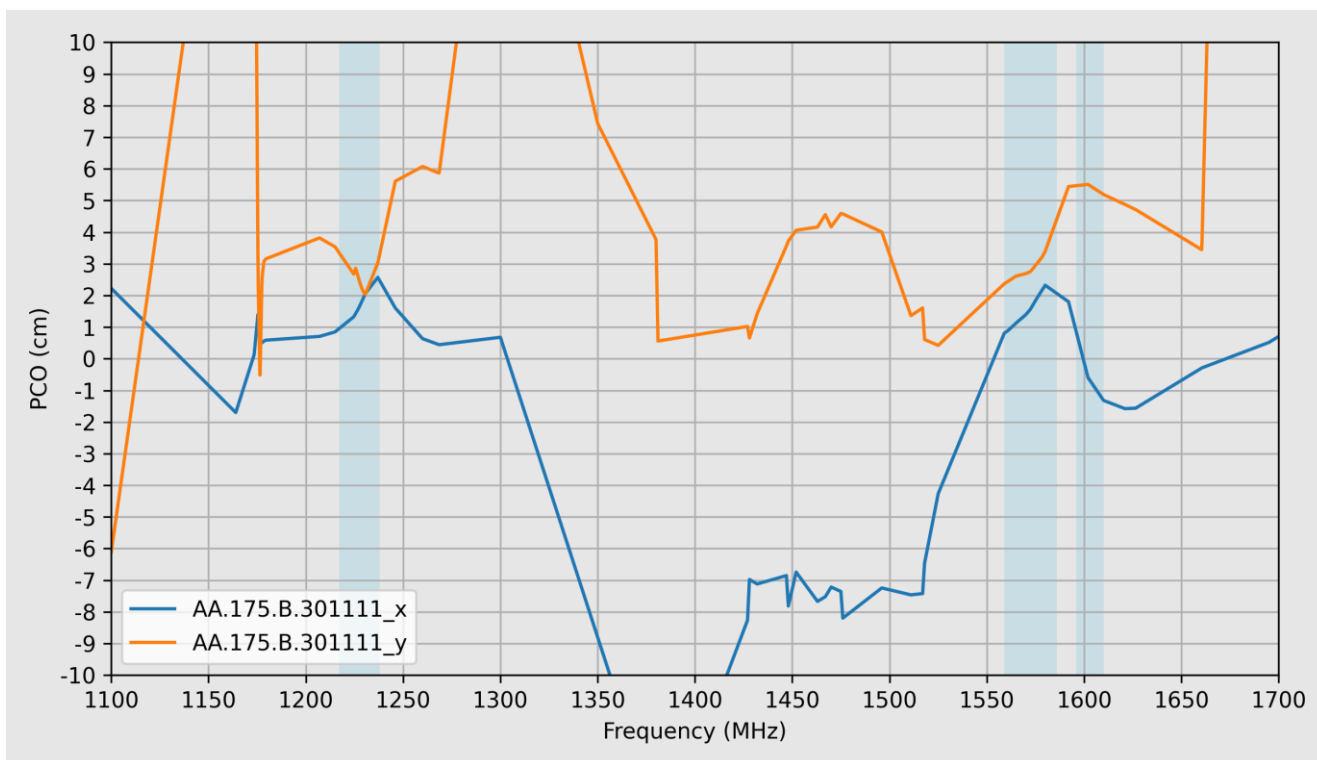


## 5.8 PCV

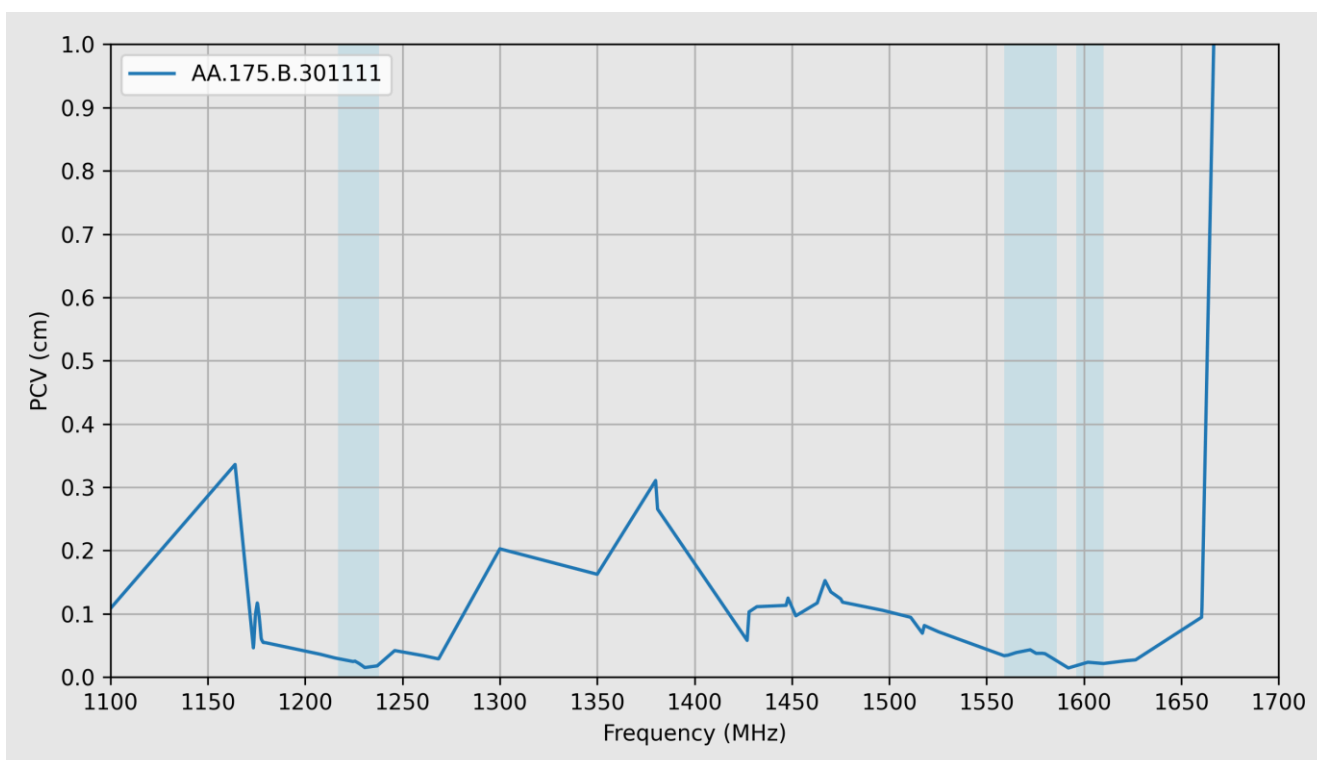


## 6. Radiation Patterns

### 6.1 Test Setup

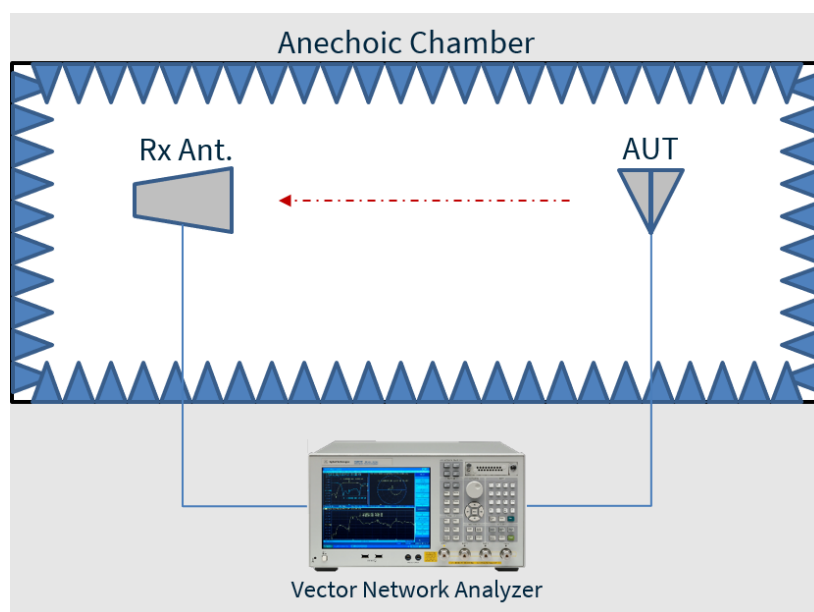


Test Set-up on a 30x30cm Metal Ground Plane


## 6.2 Patterns at 1227 MHz

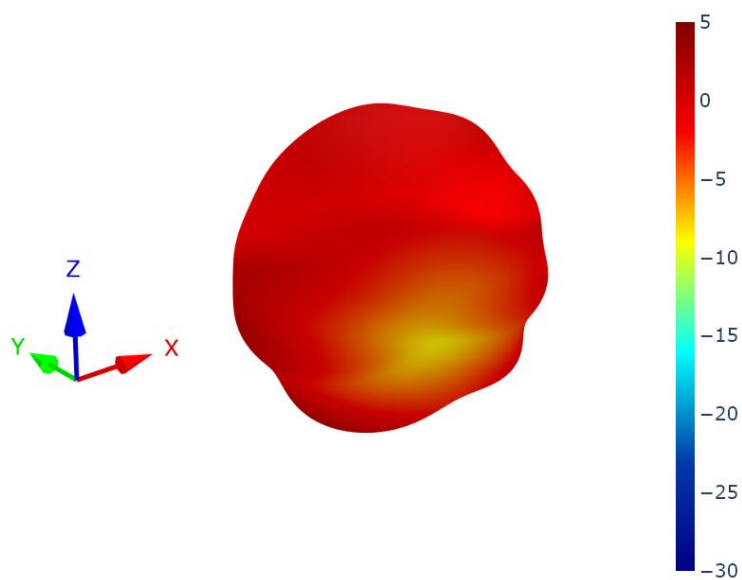


XZ Plane

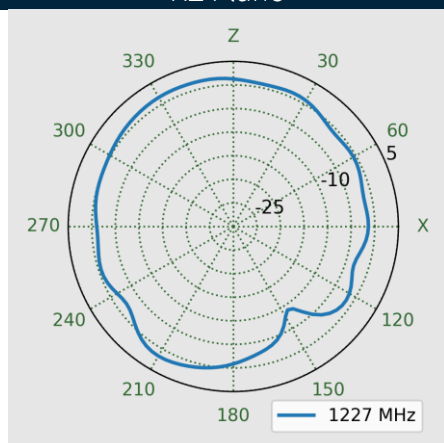


YZ Plane

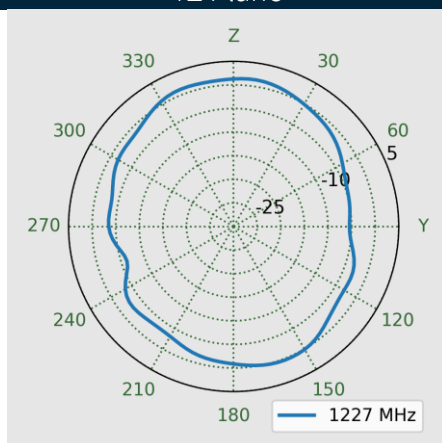


XY Plane

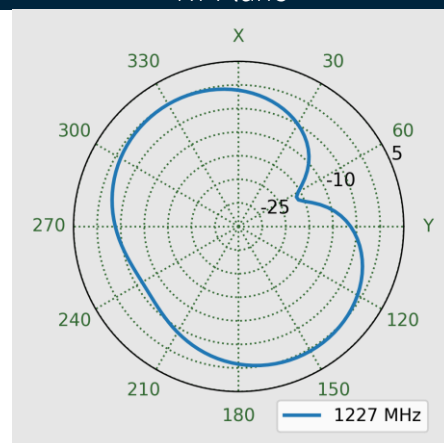


## 6.3 Patterns at 1561 MHz

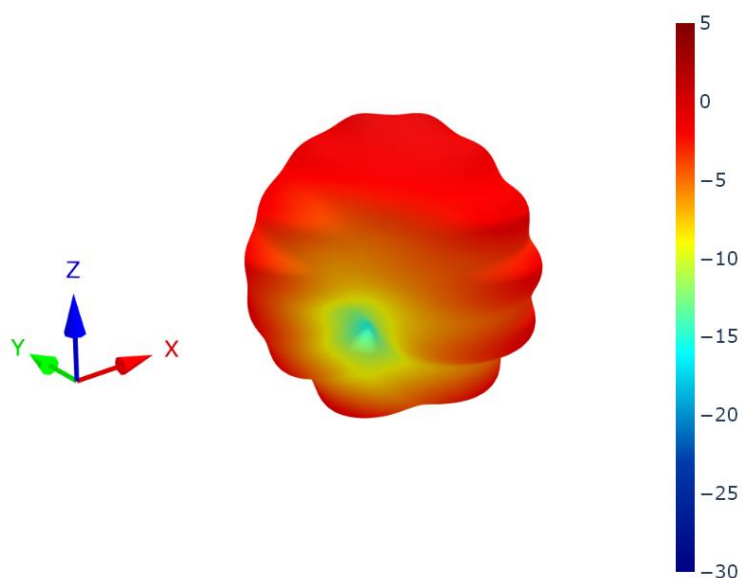


XZ Plane

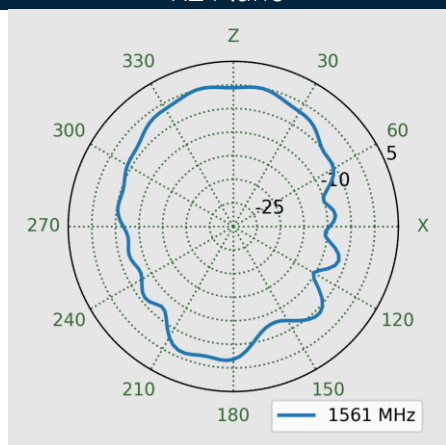


YZ Plane

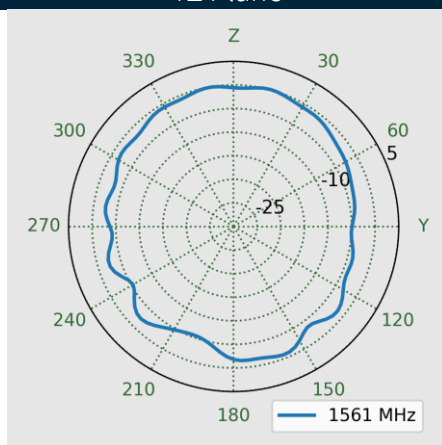


XY Plane

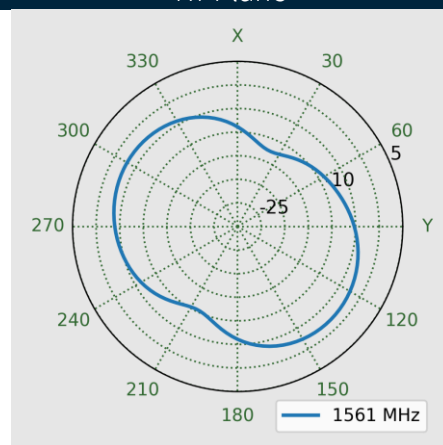


## 6.4 Patterns at 1575 MHz

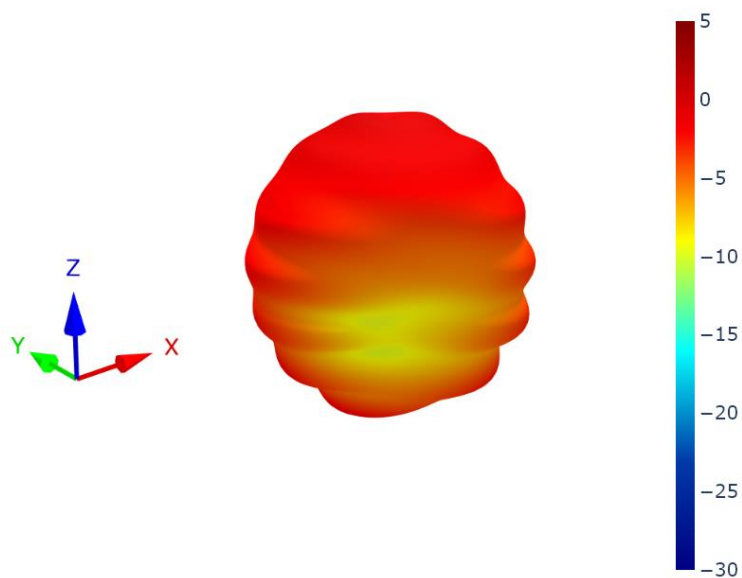


XZ Plane

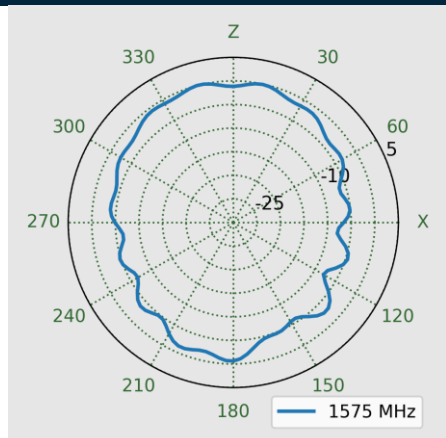


YZ Plane

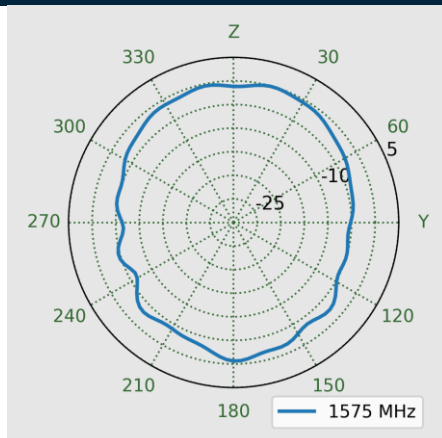


XY Plane

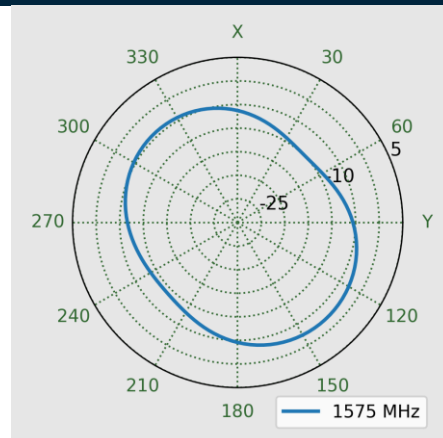


## 6.5 Patterns at 1602 MHz

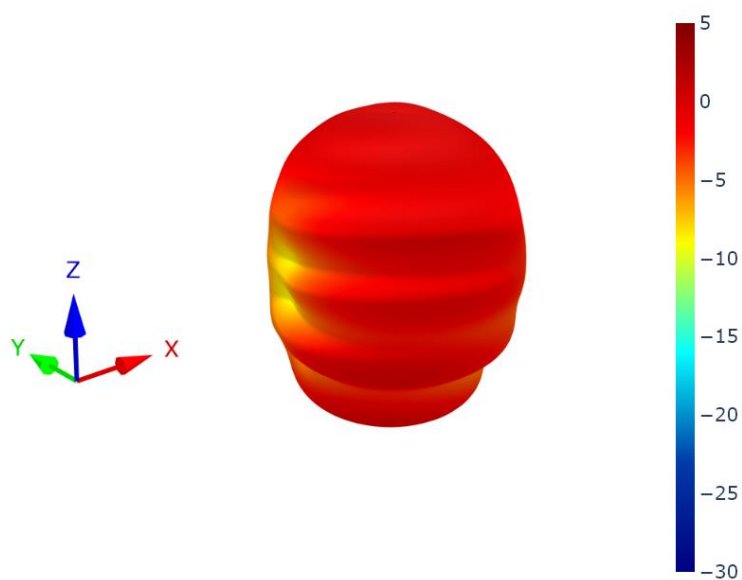


XZ Plane

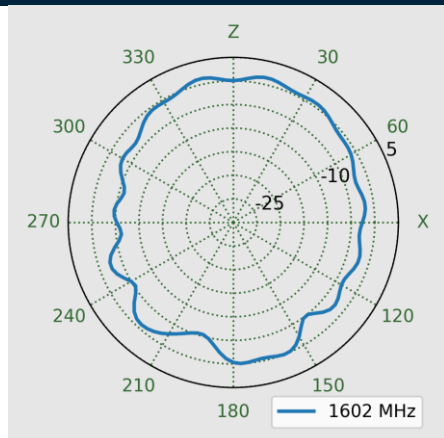

YZ Plane

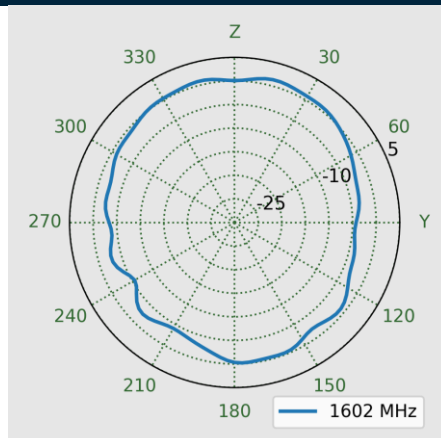


XY Plane

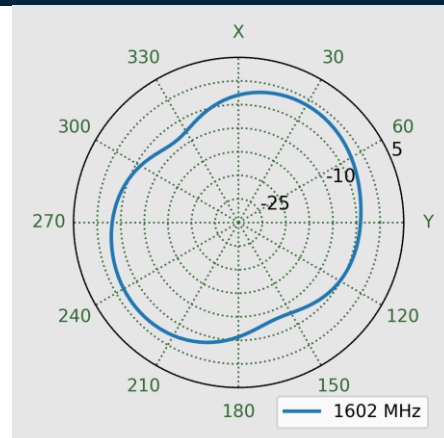


## 7. LNA Characteristics


### 7.1 Block Diagram

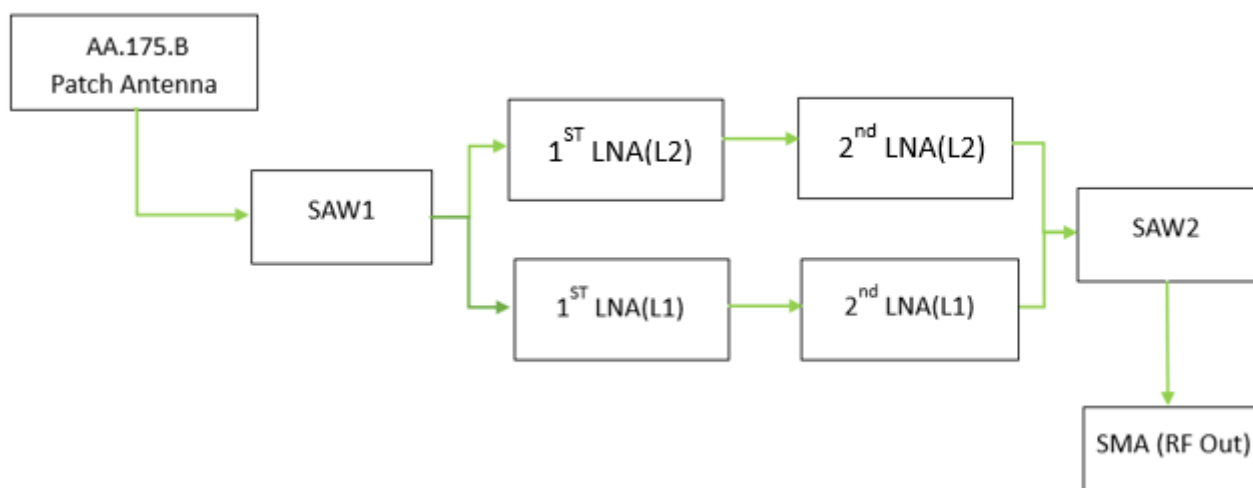


### 7.2 LNA Wide-Band Gain

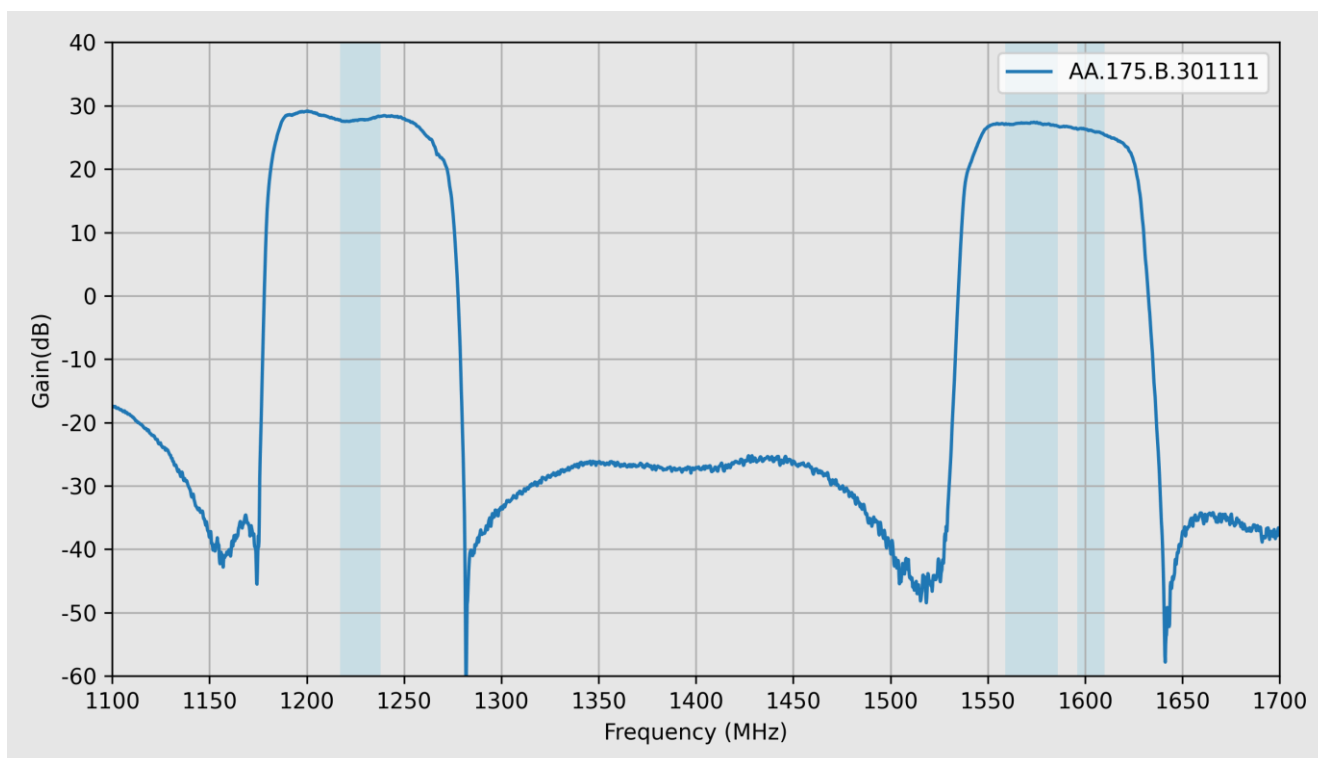


### 7.3 Out Of Band Rejection

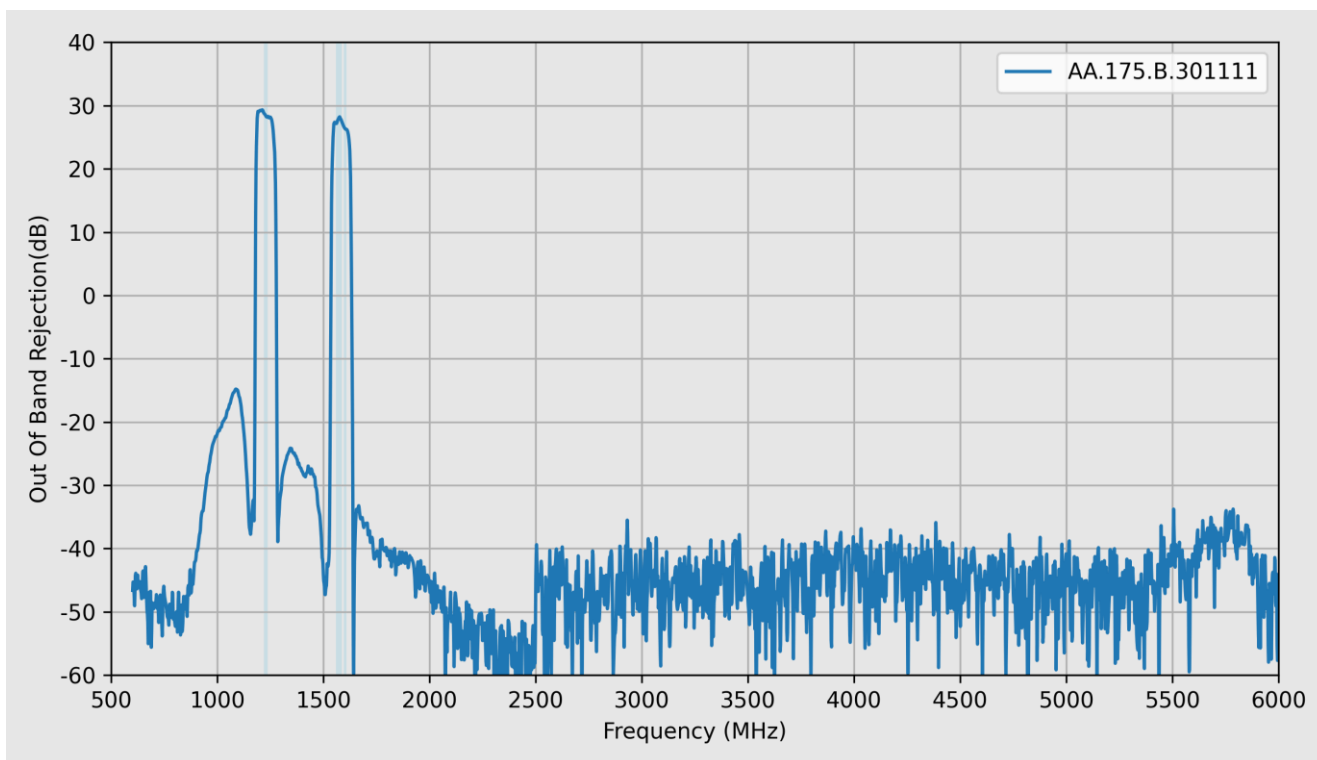


### 7.4 Gain – Low-Band

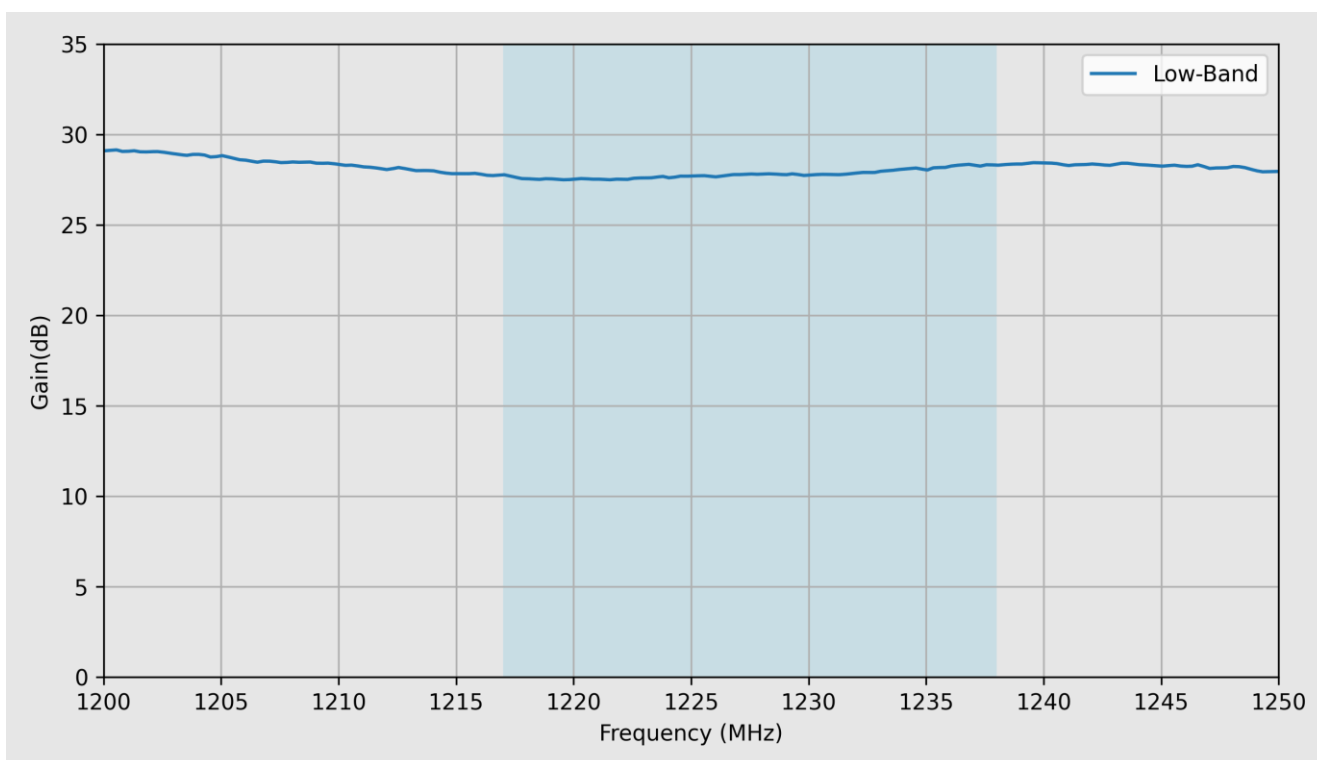


## 7.5 Gain – High-Band

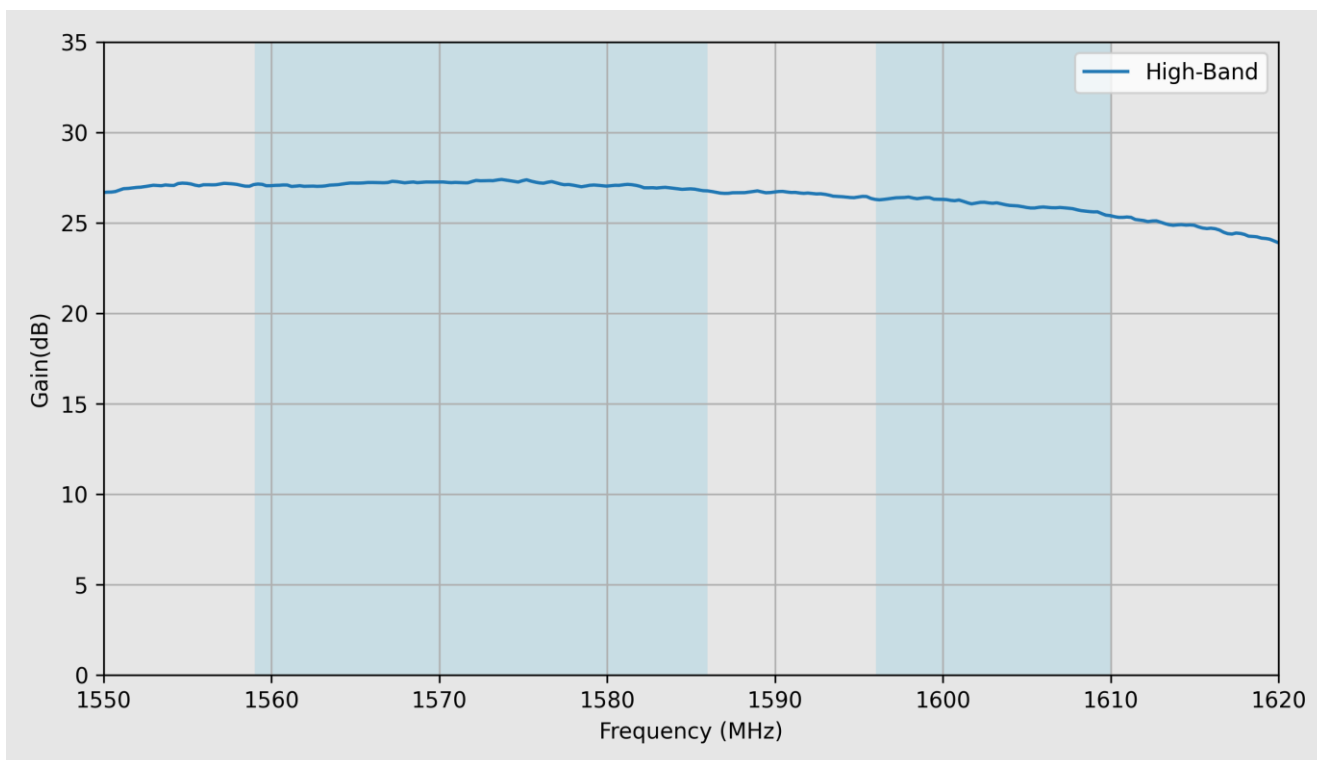


## 7.6 Noise Figure – Low-Band

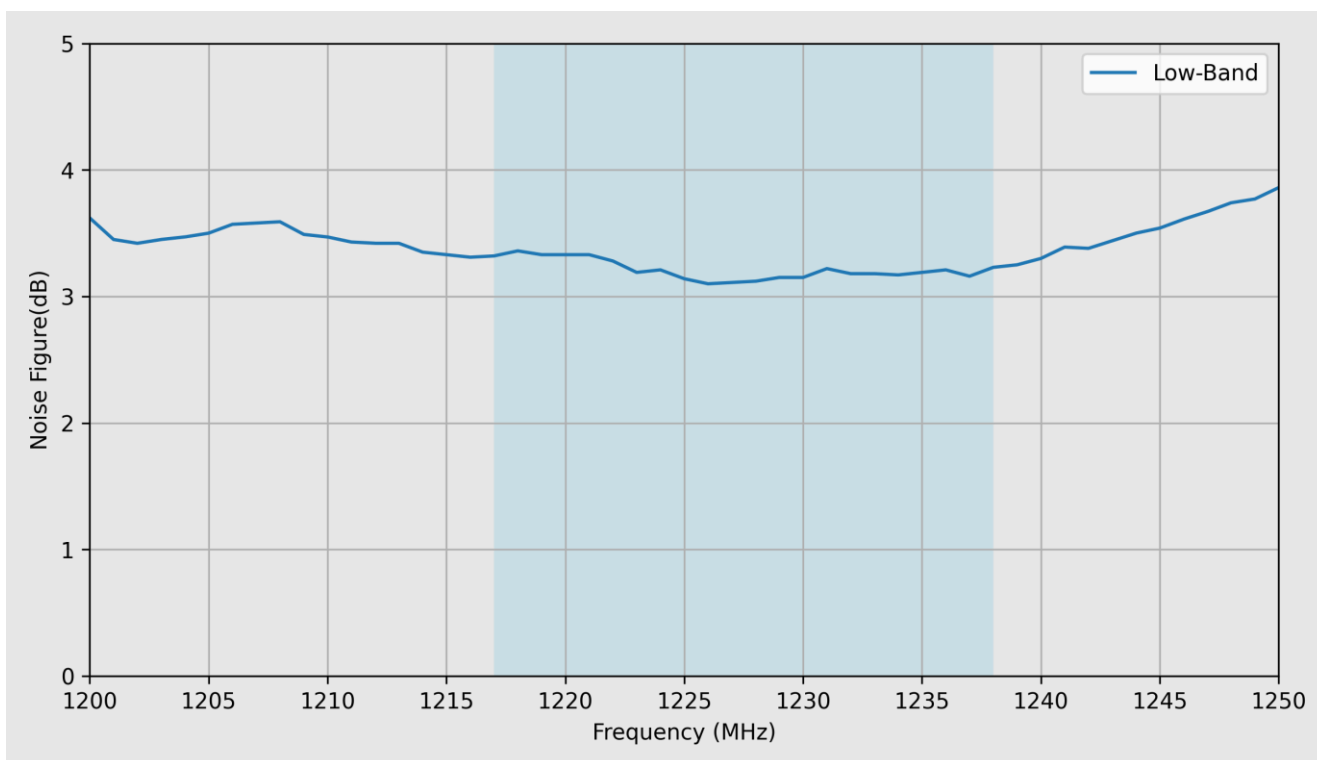


## 7.7 Noise Figure – High-Band

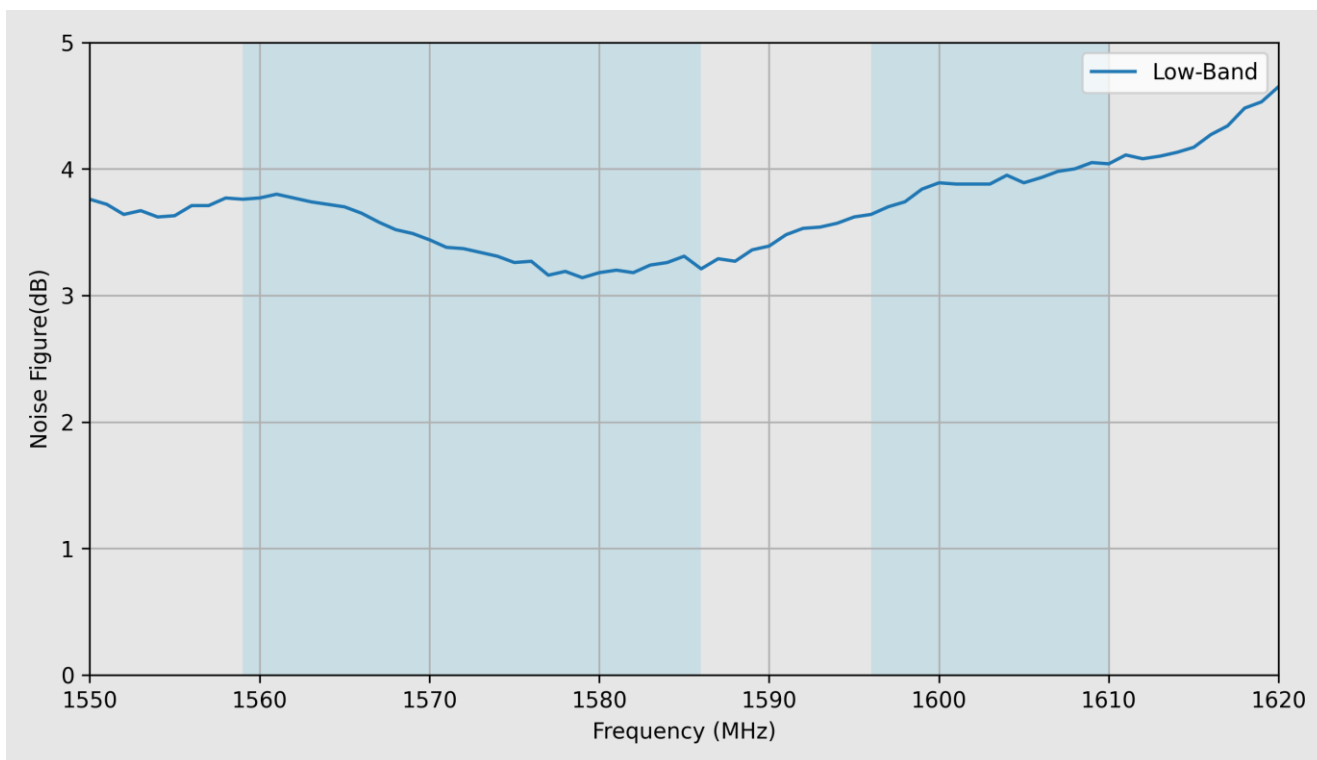

## 7.8 Group Delay – Low-Band

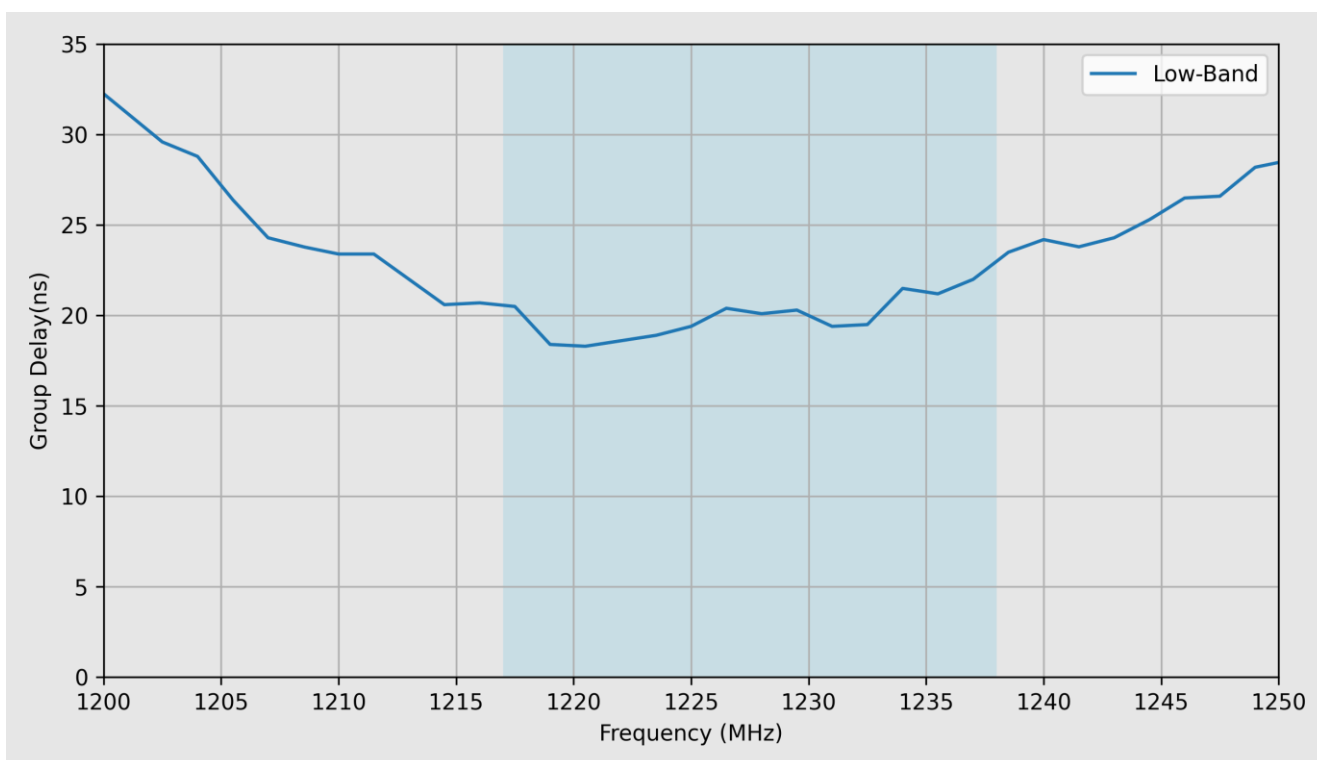

## 7.9 Group Delay – High-Band

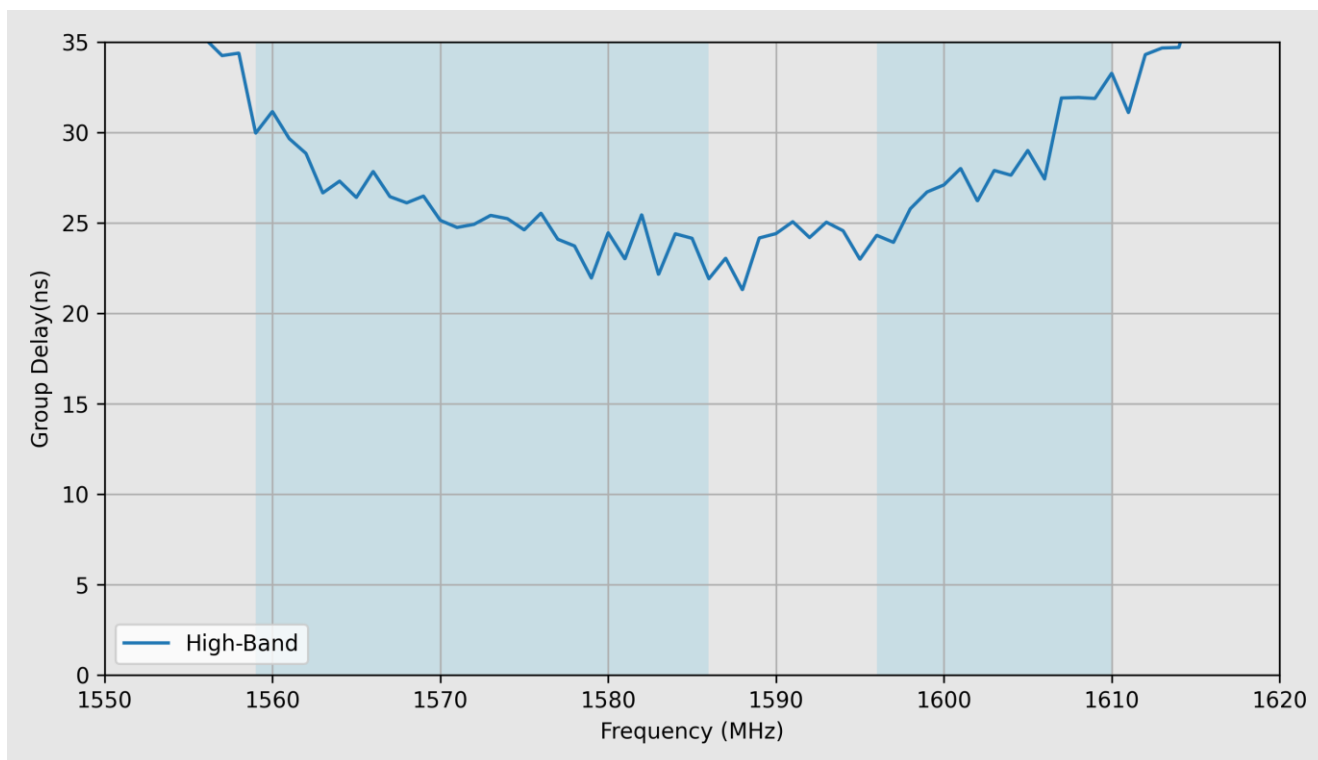

Changelog for the datasheet

SPE-24-8-166 - AA.175.B.301111

Revision: A (Original First Release)

|         |                 |
|---------|-----------------|
| Date:   | 2024-07-22      |
| Notes:  | Initial Release |
| Author: | Gary West       |

Previous Revisions

|  |  |
|--|--|
|  |  |
|  |  |
|  |  |
|  |  |
|  |  |



[www.taoglas.com](http://www.taoglas.com)



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Antennas](#) category:*

*Click to view products by [Taoglas](#) manufacturer:*

Other Similar products are found below :

[108-00014-50](#) [66089-2406](#) [A09-F8NF-M](#) [RGFRA1903041A1T](#) [108-00016-050](#) [W1049B090](#) [WTL2449CQ1-FRSMM](#) [CPL9C](#) [0600-00060](#)  
[GD53-25](#) [S9025PLSMF](#) [GPSCPMM00](#) [ANTDOM-05-01-WPM](#) [ANT-WP868SMA-Y](#) [CBNC58](#) [ABFT](#) [LP800NMOW](#) [NMOQ88C](#)  
[NMOQB](#) [NMOQC](#) [ANT-GSMGPSPUKS](#) [60210](#) [60140](#) [ANT-8WPIG-UFL](#) [A21H0](#) [29000863](#) [29000848](#) [955179003](#) [22100003](#) [DL-T022-](#)  
[2.4G](#) [DL-T023-4G](#) [T1-915M](#) [DL-T021-2.4GW](#) [DL-T021-2.4G](#) [BWGNSCNX16-6B1Y2L120](#) [BWGNSCNX15-15B1Y4L120](#) [DL-T023-4GW](#)  
[J008-GSM](#) [3N0401LG-021](#) [KHA\(RG1.13\)-TX90B-IPEX](#) [KH-GPS181804-WY](#) [TX5800-JZ-5](#) [KH-113-TX100B-IPEX4](#) [3E0402BK-004](#)  
[3N0401LG-038](#) [3N0401BK-049](#) [3E0301BK-006](#) [PRO-OB-440](#) [ACR0301U](#) [BWGNSCNX9-9B1Y4L120](#)