TAOGLAS



Datasheet

Comet

Part No:
Black – MA582.A.001
White - MA582.W.001

Description

2-in-1 2x5G/4G MIMO Permanent Mount Puck Antenna with 2m 1.5DS and SMA(M)

Features:

Permanent Mount Puck Antenna
2* 4G-5G Antenna 617 – 6000MHz
IP67 Waterproof Enclosure
Dims: 101 x 101 x 20 mm
Cables: 2m of TGC-1.5DS
Connectors: SMA(M)
RoHS & Reach Compliant

1.	Introduction	3
2.	Specification	4
3.	Mechanical Drawing	6
4.	Installation Recommendations	7
5.	Packaging	9
6.	Antenna Characteristics	10
7.	Radiation Patterns	14
	Changelog	47

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein. Reproduction, use or disclosure to third parties without express permission is strictly prohibited.

1. Introduction



The Taoglas Comet MA582 is a low-profile, puck-style, screw-mount antenna that integrates two high-performance 5G/4G MIMO cellular elements. Covering all worldwide cellular frequencies from 600 MHz to 6 GHz, it achieves stable gain and efficiency that are typically difficult to realize in such a compact 101 × 101 × 20 mm form factor.

A key differentiator of the Comet MA58x series is its ability to maintain strong performance when mounted directly on metallic enclosures. Competing antennas typically experience severe efficiency losses in the lower 5G/4G bands (617–960 MHz), but the Comet was designed specifically to overcome this challenge. Leveraging Taoglas' proprietary all-metal PIFA design and advanced bandwidth optimization techniques, the MA58x series delivers consistently higher efficiency and more reliable radiation even when installed on metal housings with feed cables routed inside.

This robust design ensures dependable connectivity where other low-profile antennas fail, making the Comet series particularly well-suited for fleet and transport telematics, public safety, gateways, industrial routers, and other mission-critical applications that demand both a discreet form factor and reliable operation on metallic or equipment surfaces.

Typical Applications Include:

- Telematics, Transport and Fleet Management
- Gateways and Industrial Routers
- Connected Kiosks, Digital Signage, and Point of Sale Terminals
- Public Safety and Critical Communications
- Construction, Mining, and Heavy Equipment

The Comet has been designed as a permanent screw-mount solution, enabling installation in applications where a strong and secure mechanical attachment is required, ensuring reliable performance even in high-vibration or harsh environments. The cellular MIMO connections utilize 2 m of TGC-1.5DS low-loss coaxial cable with SMA(M) connectors as standard. Customized cable and connector versions are also available upon request. Contact your regional Taoglas customer support team for further information.

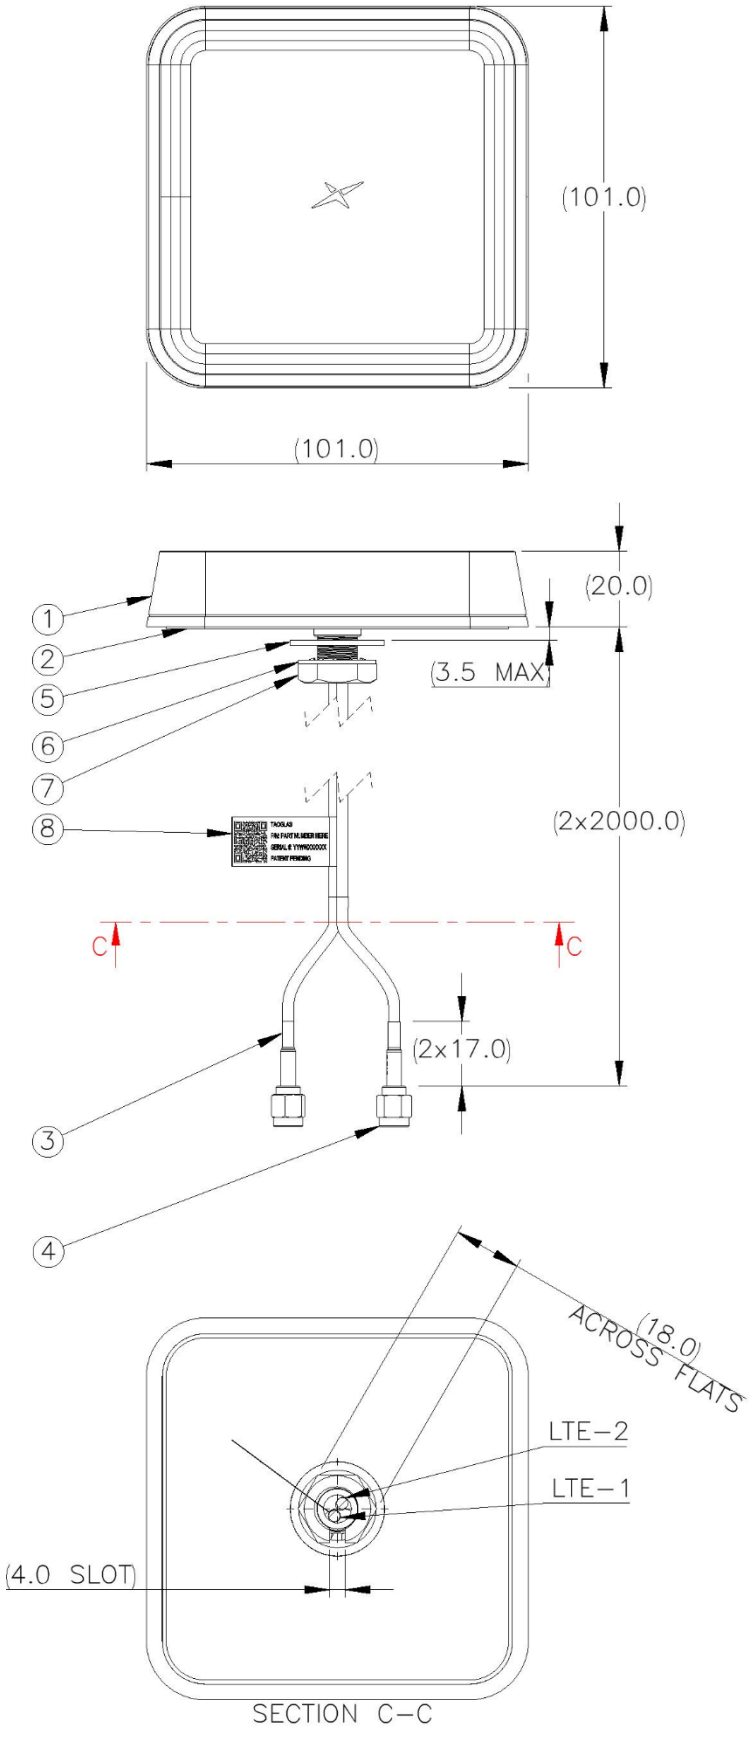
2. Specification

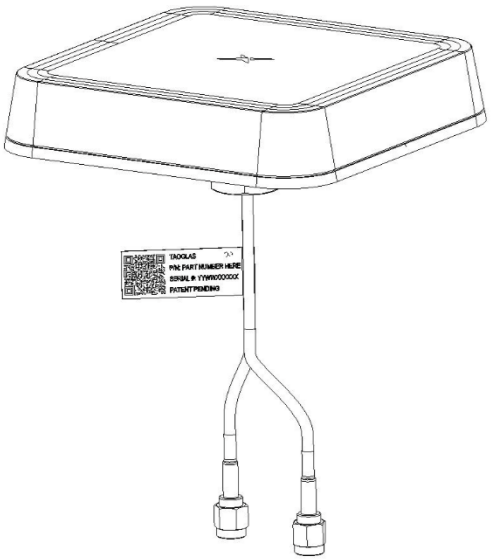
Electrical									
Band	Frequency (MHz)	Measurement	Efficiency (%)	Average Gain (dB)	Peak Gain (dBi)	Impedance	Polarization	Radiation Pattern	Max. input power
5GNR/4G Band71	617-698	4G-5G 1 - 30x30cm Ground Plane	34.2	-4.65	2.32	50 Ω	Linear	Omni directional	10W
		4G-5G 1 - Free Space	20.2	-6.94	1.66				
		4G-5G 2 - 30x30cm Ground Plane	32.5	-4.89	6.39				
		4G-5G 2 - Free Space	27.6	-5.59	4.81				
4G/3G Band 12,13,14,17,28,29	698-824	4G-5G 1 - 30x30cm Ground Plane	38.3	-4.17	2.94				
		4G-5G 1 - Free Space	32.0	-4.95	2.83				
		4G-5G 2 - 30x30cm Ground Plane	38.0	-4.20	7.01				
		4G-5G 2 - Free Space	33.4	-4.77	6.29				
4G/3G/NB-IoT/Cat M Band 5,8,18,19,20,26,27	824-960	4G-5G 1 - 30x30cm Ground Plane	33.9	-4.70	2.94				
		4G-5G 1 - Free Space	48.2	-3.17	2.83				
		4G-5G 2 - 30x30cm Ground Plane	50.2	-2.99	6.18				
		4G-5G 2 - Free Space	43.1	-3.66	6.35				
5GNR/4G Band 21,32,74,75,76	1427-1518	4G-5G 1 - 30x30cm Ground Plane	37.3	-4.29	4.82				
		4G-5G 1 - Free Space	20.7	-6.85	2.73				
		4G-5G 2 - 30x30cm Ground Plane	36.9	-4.33	5.58				
		4G-5G 2 - Free Space	52.3	-2.82	5.57				
4G/3G Band 1,2,3,4,9,23,25,35,39,66	1710-2200	4G-5G 1 - 30x30cm Ground Plane	49.5	-3.05	5.89				
		4G-5G 1 - Free Space	45.6	-3.41	5.97				
		4G-5G 2 - 30x30cm Ground Plane	34.6	-4.61	5.24				
		4G-5G 2 - Free Space	44.4	-3.53	5.46				
4G/3G Band 7,30,38,40,41	2300-2690	4G-5G 1 - 30x30cm Ground Plane	33.3	-4.78	5.81				
		4G-5G 1 - Free Space	41.2	-3.85	4.79				
		4G-5G 2 - 30x30cm Ground Plane	36.2	-4.41	5.04				
		4G-5G 2 - Free Space	45.2	-3.45	6.44				
LTE5200/Wi-Fi5800	5150-5925	4G-5G 1 - 30x30cm Ground Plane	20.1	-6.96	4.68				
		4G-5G 1 - Free Space	28.1	-5.51	4.98				
		4G-5G 2 - 30x30cm Ground Plane	30.1	-5.21	4.42				
		4G-5G 2 - Free Space	28.1	-5.51	1.58				
5GNR/4G Band 22,42,48,77,78,79	3300-5000	4G-5G 1 - 30x30cm Ground Plane	21.7	-6.63	4.91				
		4G-5G 1 - Free Space	23.7	-6.25	5.03				
		4G-5G 2 - 30x30cm Ground Plane	20.0	-7.00	5.64				
		4G-5G 2 - Free Space	21.0	-6.77	4.16				

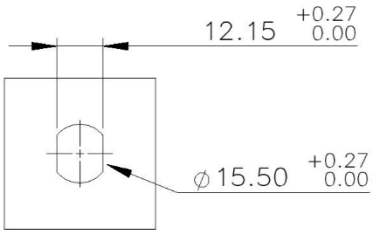
Mechanical	
Dimensions	101 x 101 x 20mm
Weight	175g
Material	ASA
Connector	SMA (M)
Cable	2m of 1.5DS
Thead Diameter	M12

Environmental	
Waterproof Rating	IP67
Operation Temperature	-40°C to 85°C
Storage Temperature	-40°C to 85°C
Relative Humidity	Non-condensing 65°C 95% RH
RoHs & REACH Compliant	Yes

3. Mechanical Drawing







MOUNTING HOLE REQUIREMENTS

ITEM NO.	DESCRIPTION	Color	QTY.
1	Antenna	RAL 9003-P Signal White, Logo Pantone 2965C Navy Blue	1
2	Foam Gasket with Two Sided PSA-Comet	Black	1
3	Cable Assy SMA(M) LTE-1	Cable Black, Heat Shrink Red With White Text	1
4	Cable Assy SMA(M) LTE-2	Cable Black, Heat Shrink Red With White Text	1
5	G30 Gasket POM/MITSUBISHI ENGINEERING-PLASTICS CORP-F20-03 PANTONE Red(199C)	Red	1
6	M12 Internal Tooth Washer	N/A	1
7	Hex Nut, M12 x 1P x 5mm, 4.0mm Slot	N/A	1
8	QR Label	White	1

Installation Instructions

Comet MA58x Series

Low Profile Permanent Mount Combination Antenna

A Introduction

The **Taoglas Comet MA58x Series** is a low-profile, puck-style, screw-mount antenna that integrates two high-performance 5G/4G MIMO cellular elements and one GNSS element. Covering all worldwide cellular frequencies from 600 MHz to 6 GHz, along with GPS, GLONASS, and BeiDou bands, it achieves stable gain and efficiency that are typically difficult to realize in such a compact 101 × 101 × 20 mm form factor.




Electrical Safety
The Comet can contains an active GPS/GNSS antenna.
Rated voltage: 1.8-5.5VDC Rated current: 10mA maximum
The supply to this device must be provided with overcurrent protection of 1A maximum.

Power consumption @ 1.8-5.5V ; 10 mA

B Mounting & Location

Secured via a ø12mm diameter threaded mounting stud, The Comet is recommended to be fitted by drilling a ø13mm hole will need to be drilled in the roof or enclosure surface.


When mounting on a vehicle roof panel ensure to mount on a flat surface, and measure for a central position. Care should be taken to mount the Comet antenna as far as possible from other roof-mounted features such as the aircon unit, light bar etc.



Sealing
In order to ensure that the installation is properly sealed against the mounting surface care must be taken regarding curvature of the mounting panel. It is highly recommended to install the antenna on a clean, flat and level surface. After installation the compression of the foam gasket and adhesive against the mounting panel should be checked and a small bead of neutral cure silicone sealant can be applied around the periphery of the enclosure if required.

C Surface Preparation

When preparing to drill the hole, mask the area around the hole position to protect the surface. If an existing OEM antenna mounting hole is not present, drill a pilot hole and increase the hole size to ø12mm (0.472”). Ensure the drill bit does not contact the headliner. Then deburr and clean the area around the hole carefully removing all waste.




Remove paint and primer from under panel surface to ensure adequate earth contact by washer and nut. Apply petroleum jelly or paint around cut edge of the hole to prevent corrosion

www.taoglas.com


D Adhesive Foam Gasket

On the underside of the antenna there is a 3M adhesive foam gasket. Peel away the 3M adhesive protection and feed the cables through the hole. Position the antenna over the hole and press down onto the panel with pressure. This adhesion will ensure the antenna is securely mounted and will also allow for extremely minimal curvature on the roof of a vehicle.



E Securing the Mount

A split nut is used to easily fit onto the thread through the cables. The nut is attached from the underside of the panel, it should easily twist onto the thread and then secured in place with a final tighten with a spanner. After tightening, double check the antenna to make sure that it is properly secured.



F Cable Routing and Connection

The cables supplied are RG-174 and TGC-1.5DS for all feeds. The heatshrink will denote which cable is which for ease of installation. Connect each individual connector to the correct port of the router, if any cable is unused please fit a 50Ω terminator to the individual connection.



G Notices

Caution
To comply with FCC RF Exposure requirements in section 1.1310 of the FCC Rules, antennas used with this device must be installed to provide a separation distance of at least 20 cm from all persons to satisfy RF exposure compliance.

Warning
Do not operate the equipment in an explosive atmosphere.

European Waste Electronic Equipment Directive 2012/19/EU
Please ensure that your old Waste Electricals and Electronics are recycled do not throw them away into standard waste.

Hazardous Substances Directive (RoHS) 2011/65/EU / 2015/863/EU
Directive 2014/53/EU Radio Equipment Directive (RED)

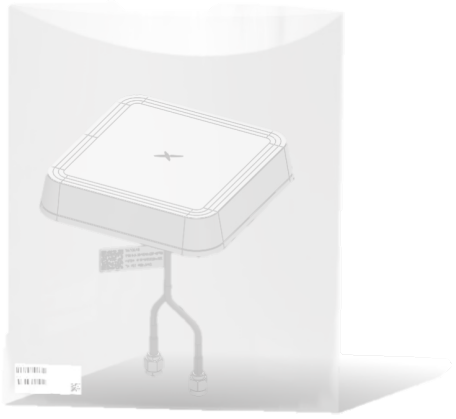
View CE Certificate online:
www.taoglas.com/assets/ce/CE-Declaration-of-Conformity-RoHS-RED-Patriot-Series.pdf

Harmonised Standards and References:
EN 301 489-1 (V2.2.3): ElectroMagnetic Compatibility (EMC) standard for radio equipment and services;
Part 1: Common technical requirements. Referencing CENELEC EN 55032 Class B.

Waiver: This document represents information compiled by Taoglas to the best of our current knowledge. This is not intended to be used as a representation or warranty of fitness of the products described for any particular purpose. This document details guidelines for general information purposes only. When planning installations, always seek specialist advice and ensure that the products are always installed by a properly qualified installer in accordance with applicable regional laws and regulations.

All copyrights, trademarks and any other intellectual property rights related are owned by Taoglas Group Holdings Limited.

5. Packaging



☑ 1 PCS / PE bag

☑ PE bag(mm): 200x130 (Ref)

☑ Weight (g): 175 ±3%

☑ SPQ Label



☑ 50 PCS / Carton

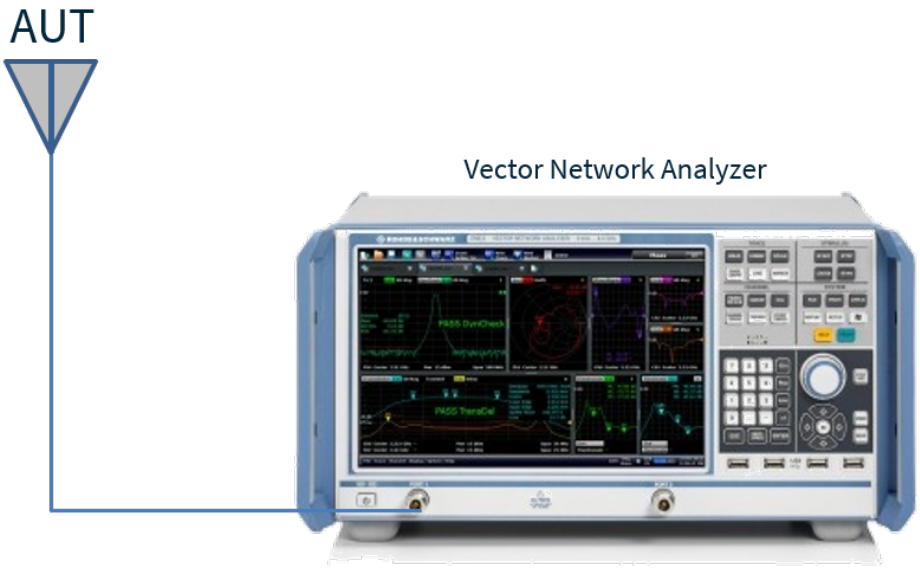
☑ Carton(mm): 370x370x300

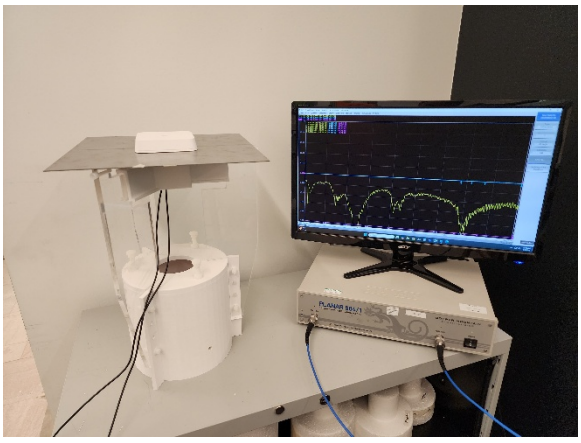
☑ Weight (Kg): 9.65 ±3%

☑ Carton Label


6. Antenna Characteristics

6.1 Test Setup






Set-up on a 30x30cm Ground Plane

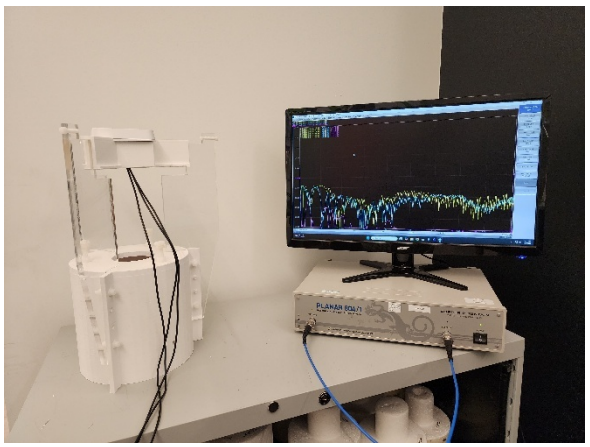


Set-up in Free Space

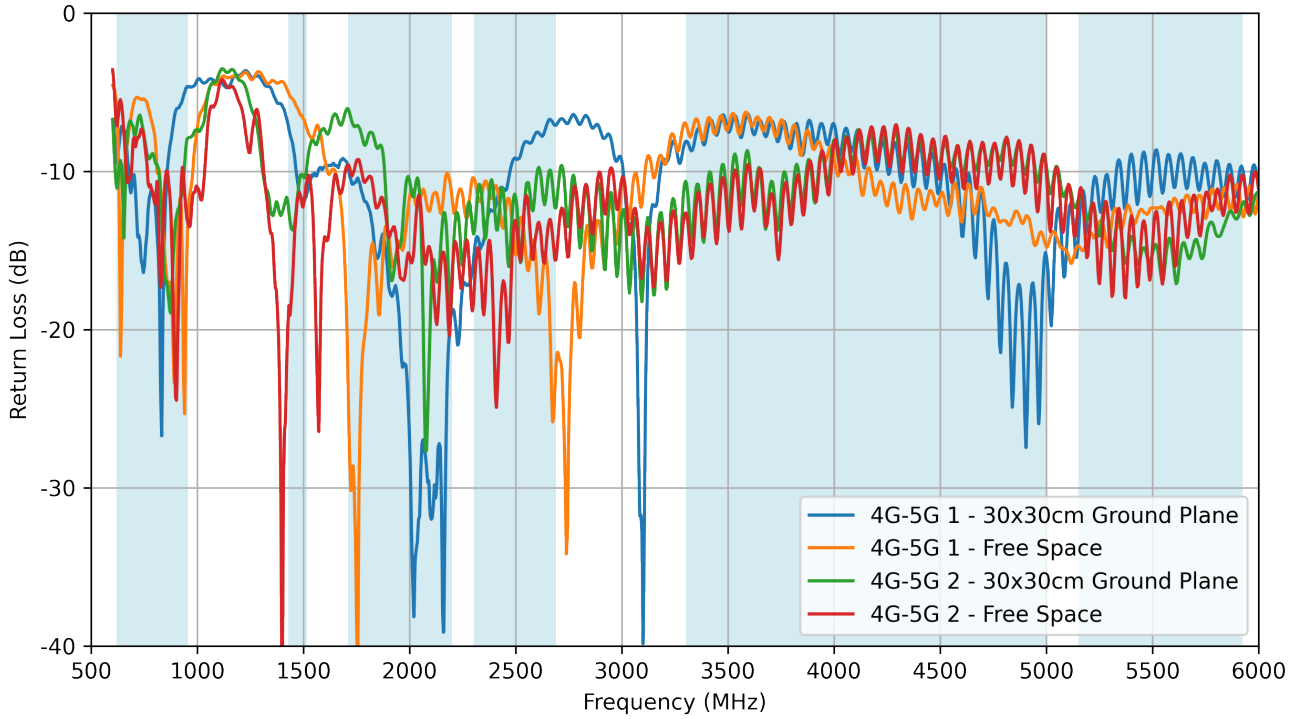
6.2 Return Loss



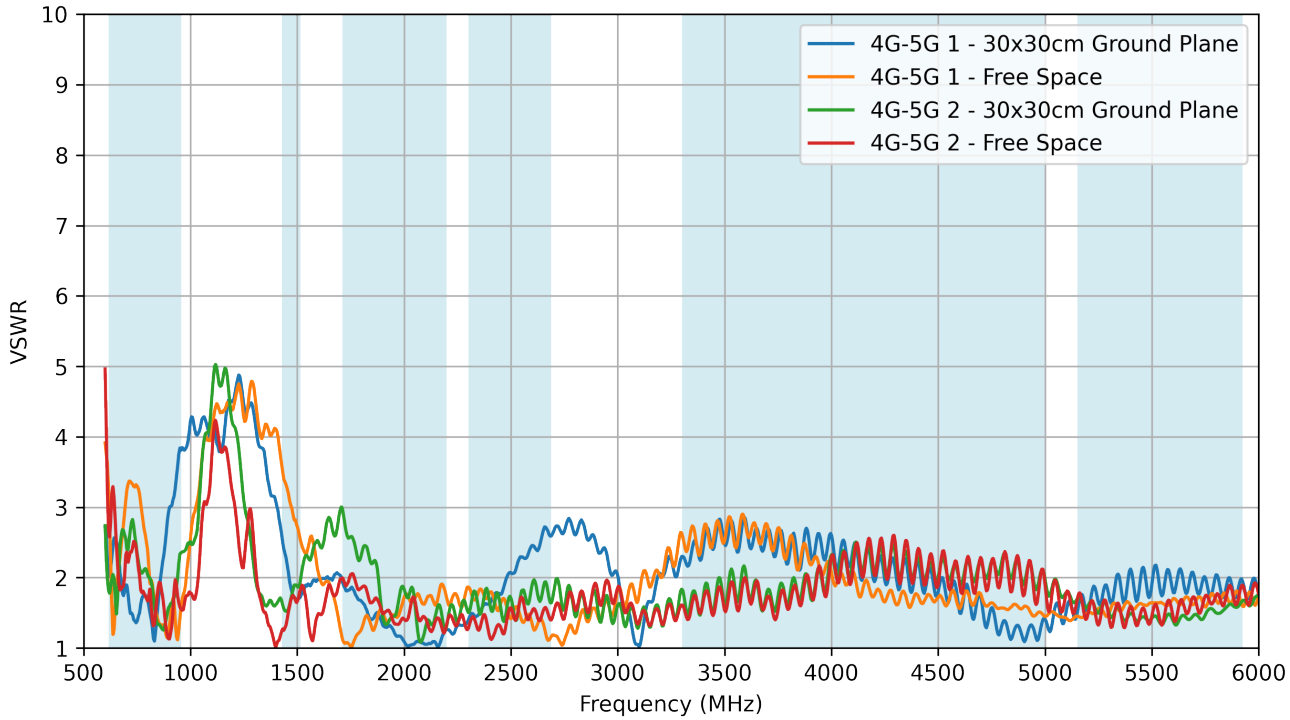
6.3 VSWR



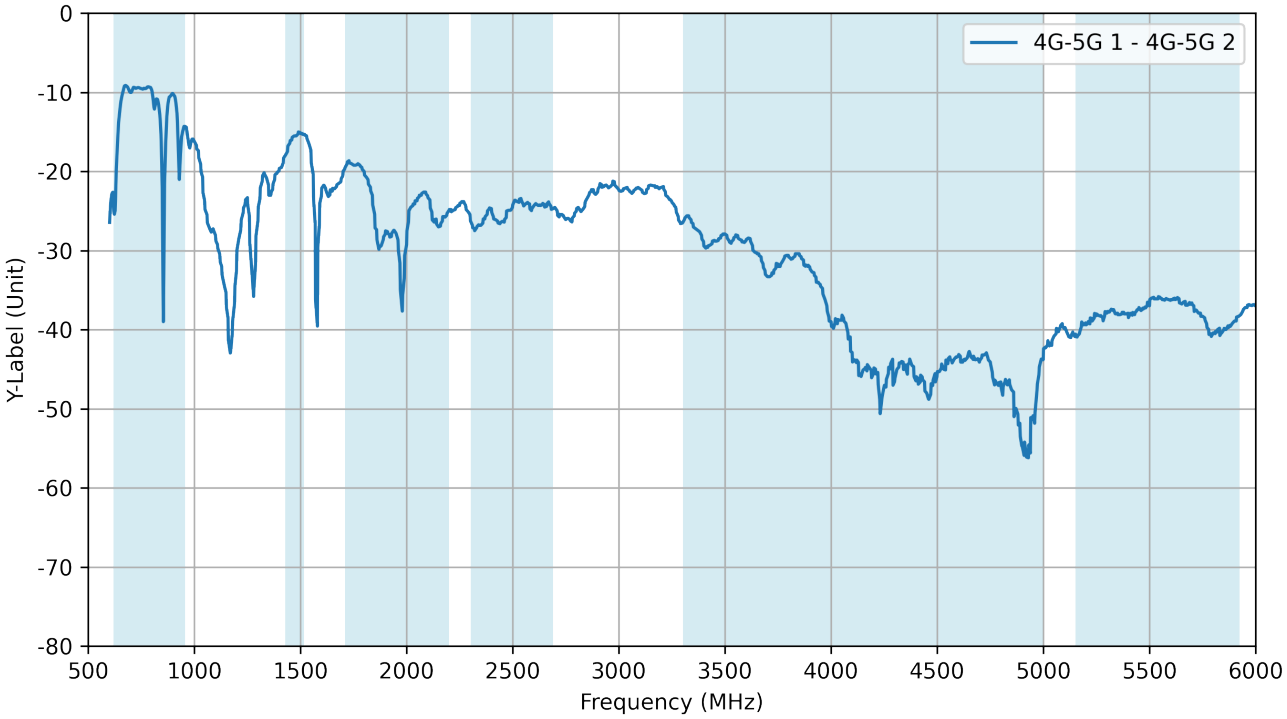
6.4 Isolation



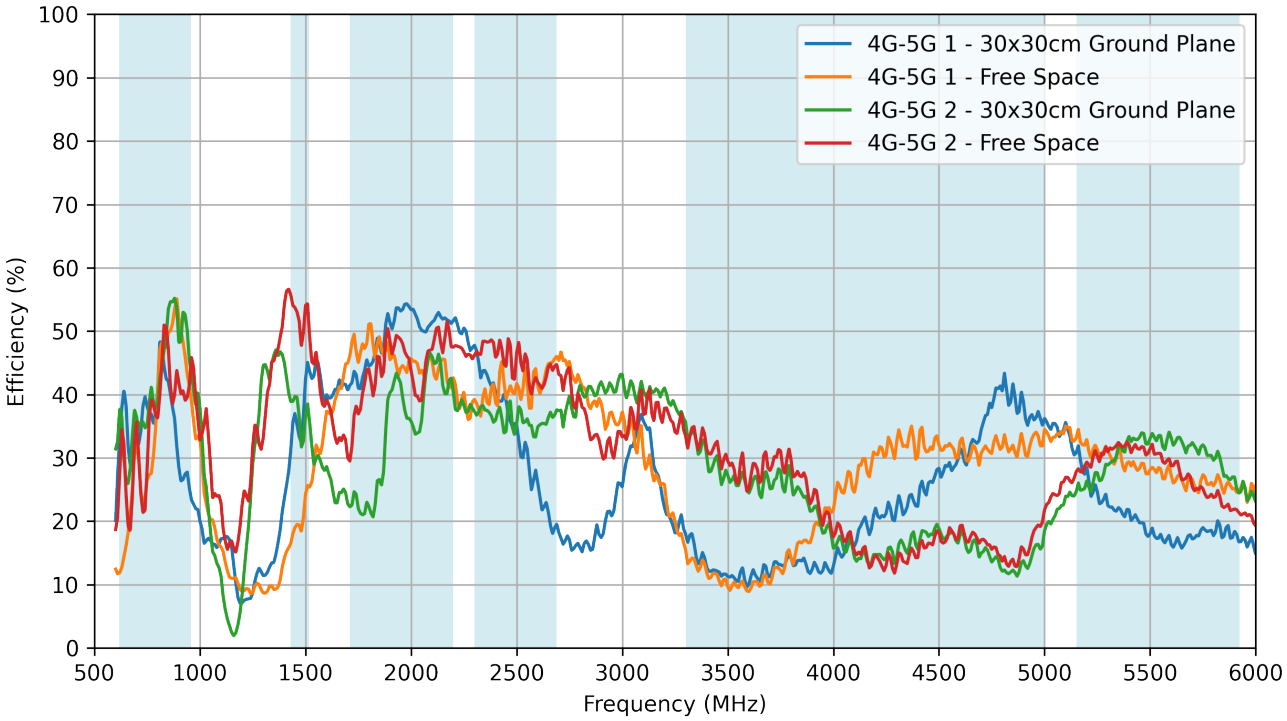
6.5 Efficiency



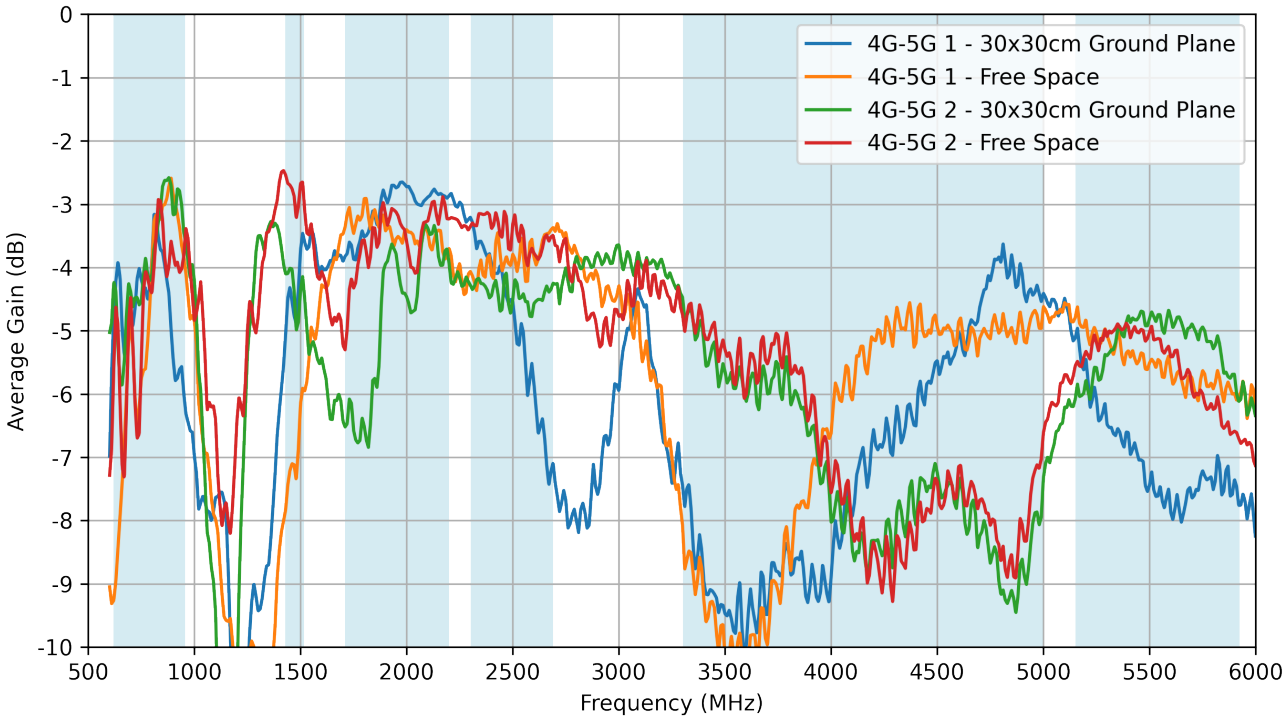6.6 Average Gain




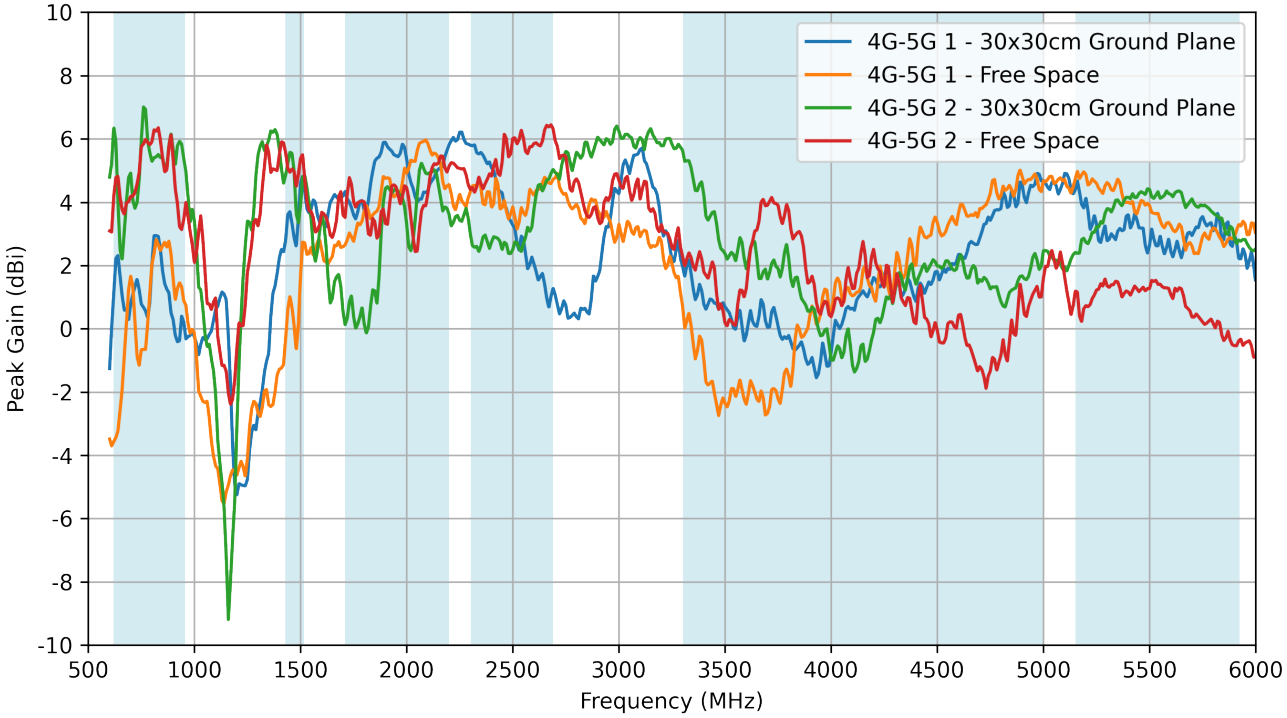
6.7 Peak Gain




7. Radiation Patterns

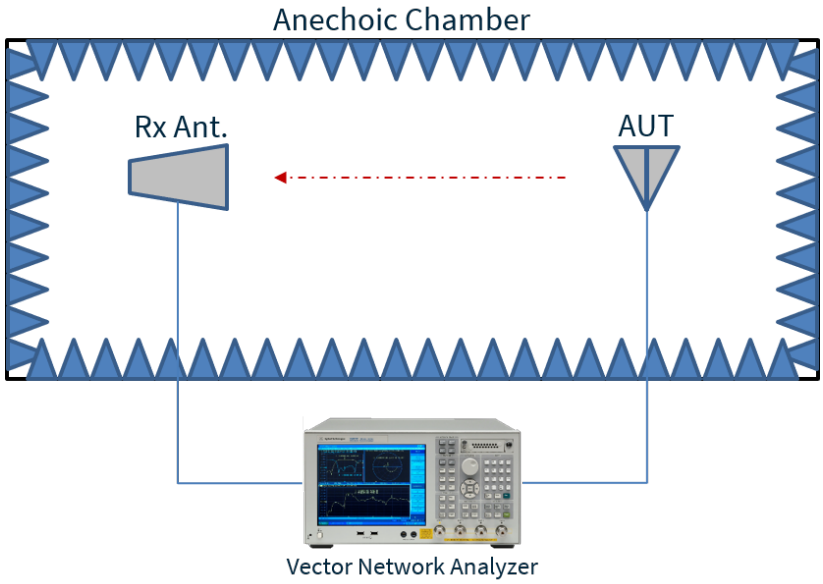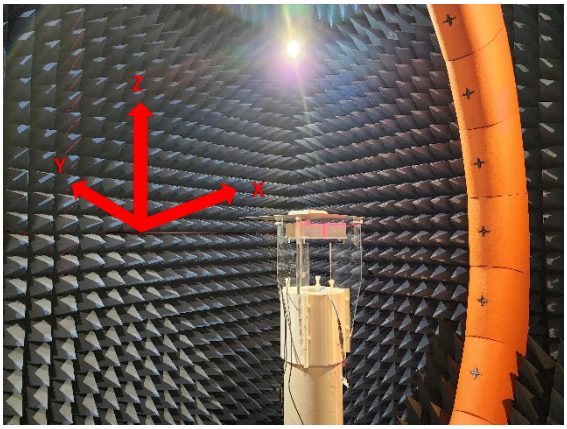7.1 Test Setup






Set-up on a 30x30cm Ground Plane

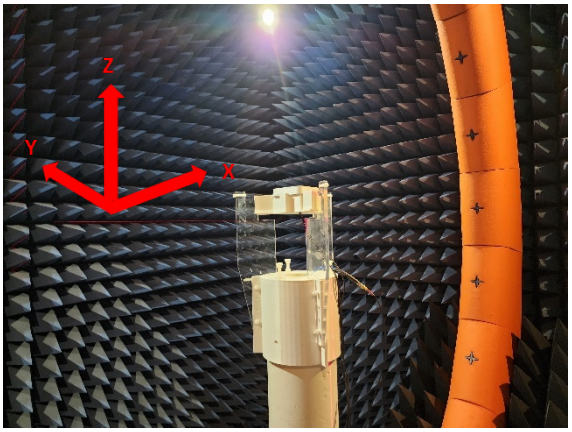



Set-up in Free Space

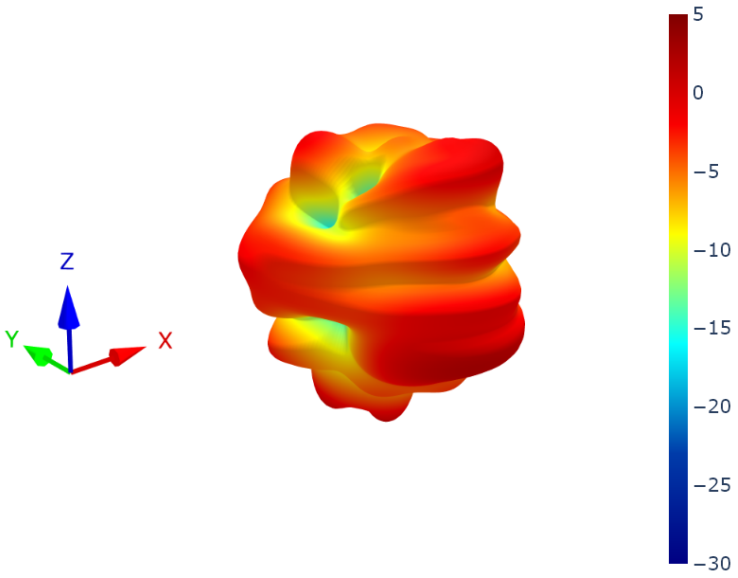
7.2 4G-5G 1 - 30x30cm Ground Plane Patterns at 650 MHz




XZ Plane	YZ Plane	XY Plane



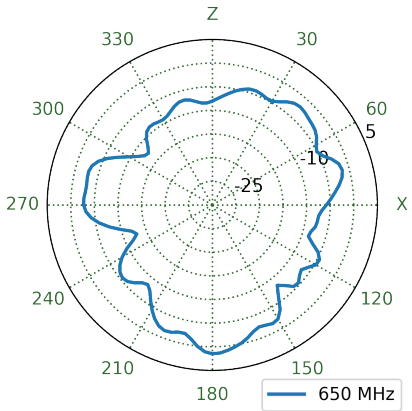


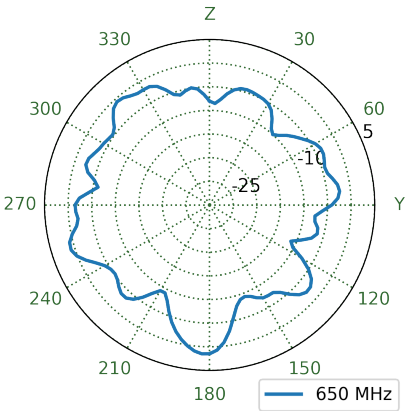

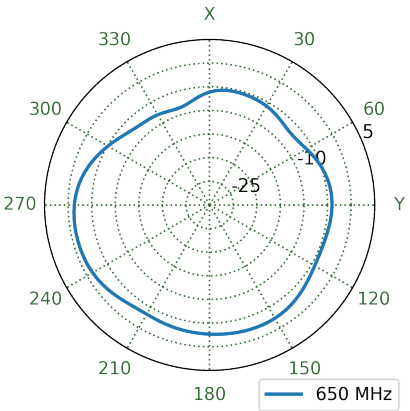


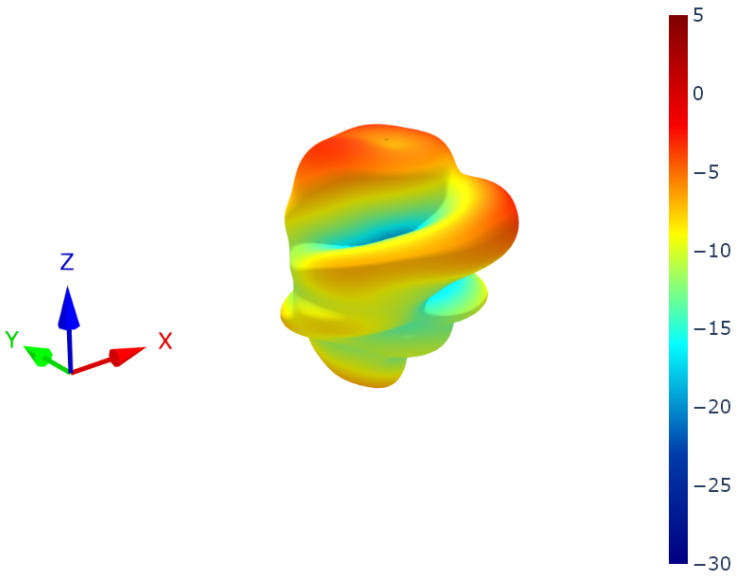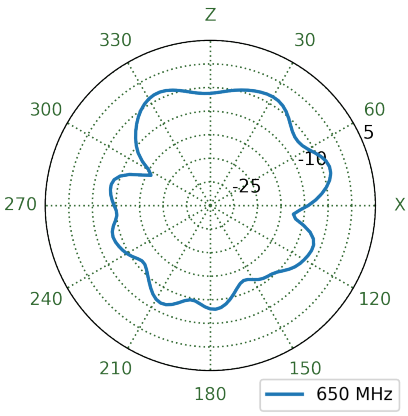
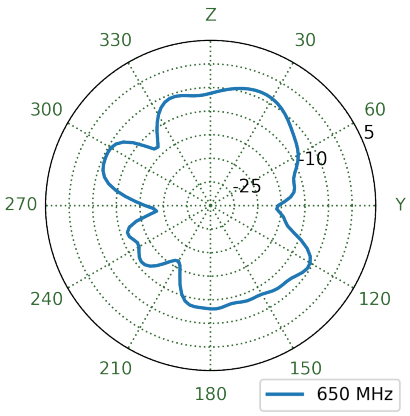
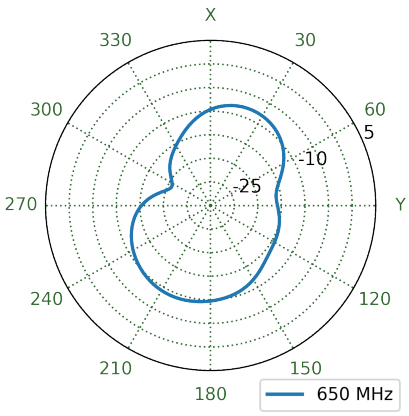
7.3 4G-5G 1 - Free Space Patterns at 650 MHz




XZ Plane	YZ Plane	XY Plane
		

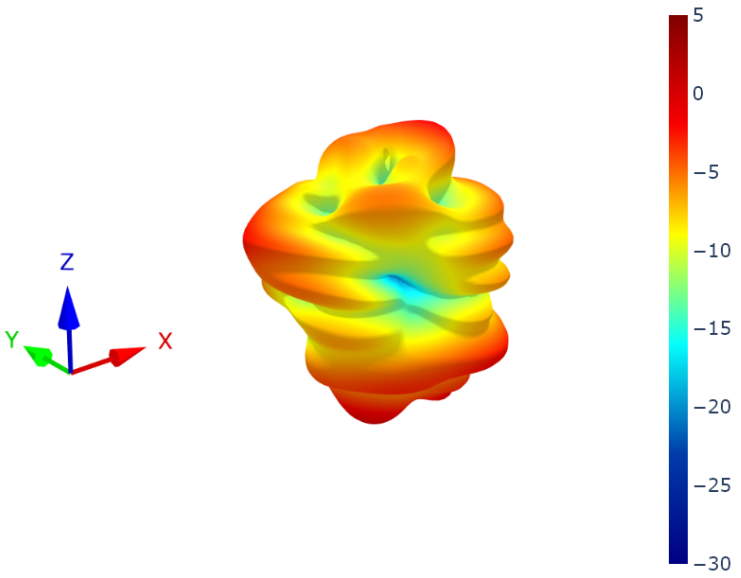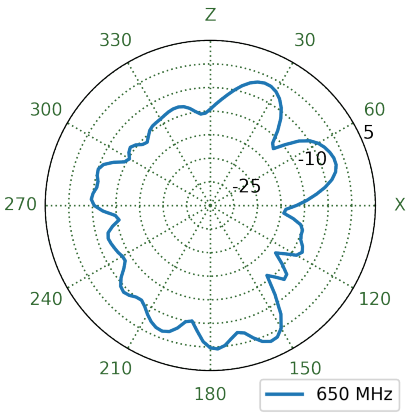
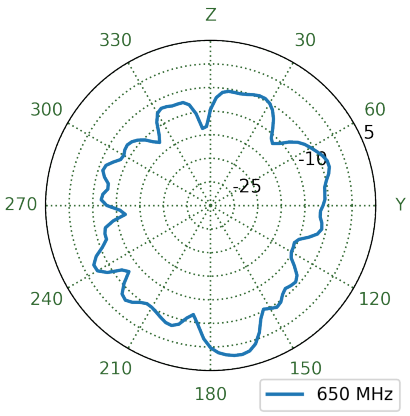
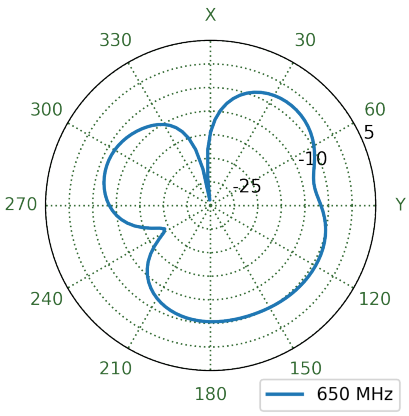
7.4 4G-5G 2 - 30x30cm Ground Plane Patterns at 650 MHz




XZ Plane	YZ Plane	XY Plane
		

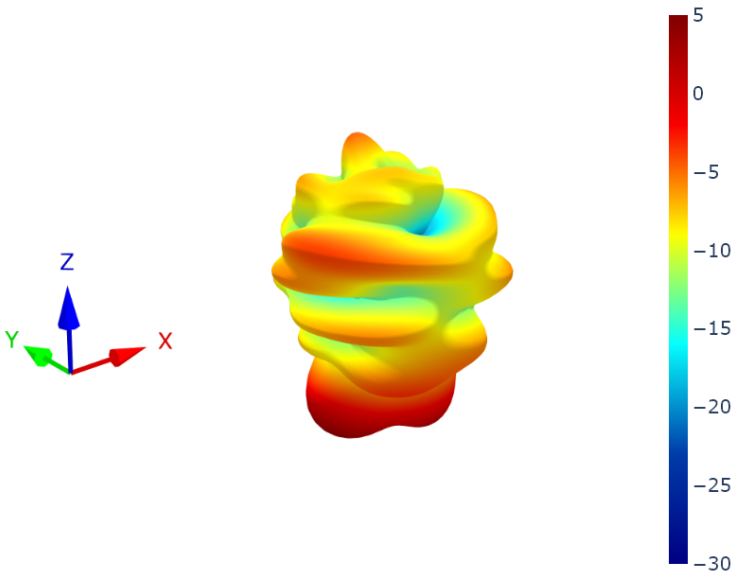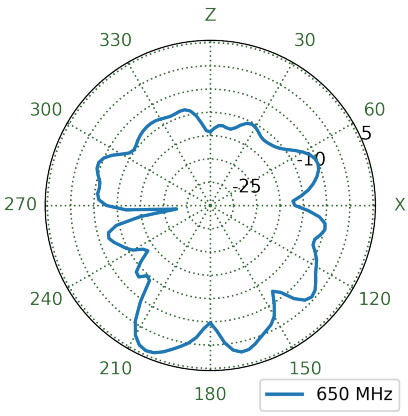
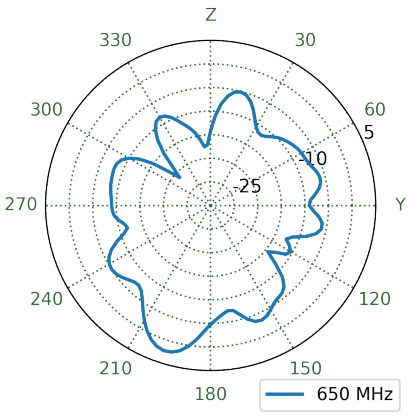
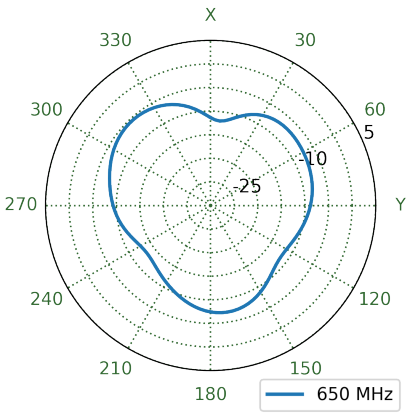
7.5 4G-5G 2 - Free Space Patterns at 650 MHz




XZ Plane	YZ Plane	XY Plane
		

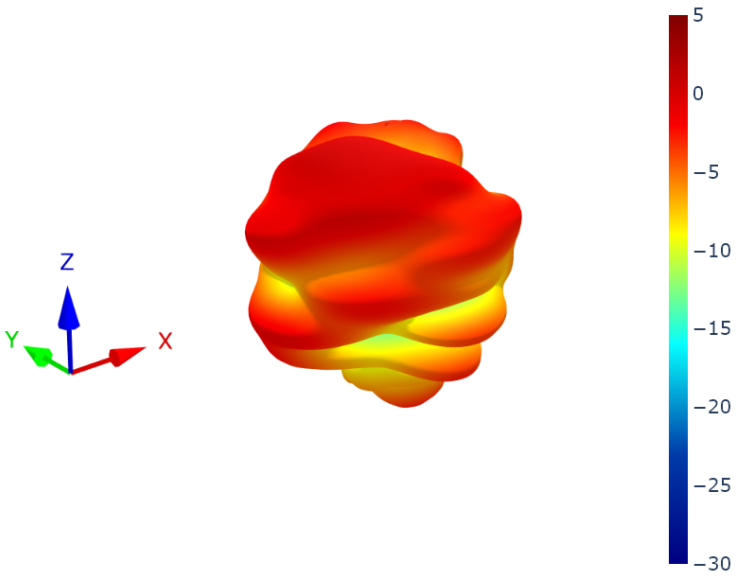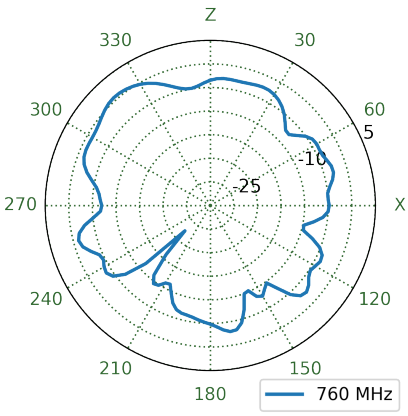
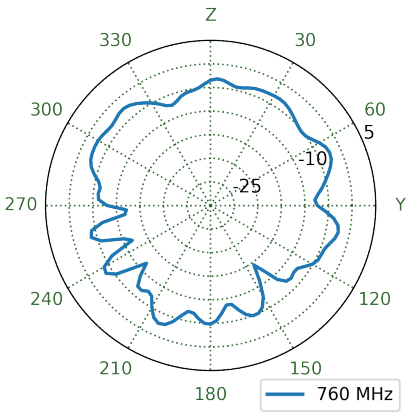
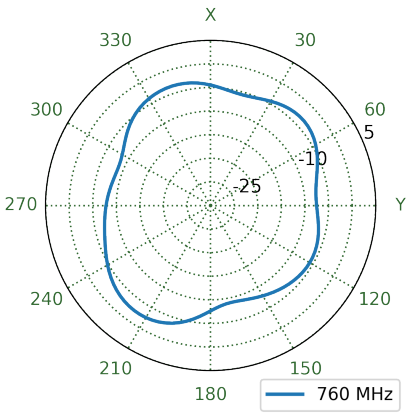
7.6 4G-5G 1 - 30x30cm Ground Plane Patterns at 760 MHz




XZ Plane	YZ Plane	XY Plane
		

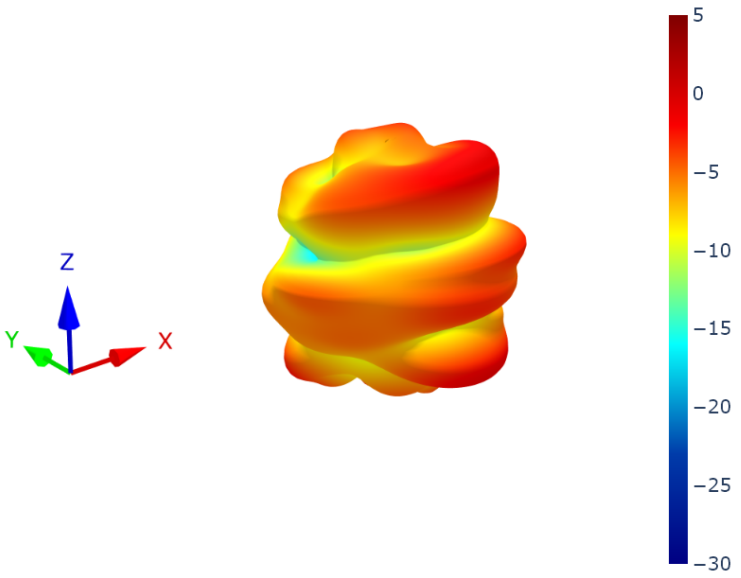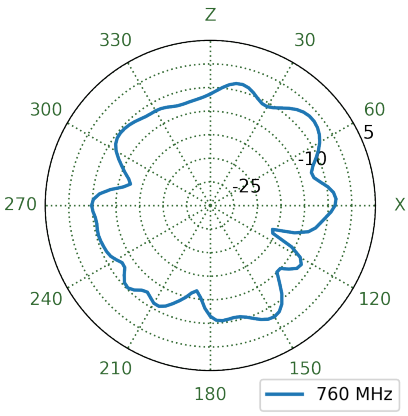
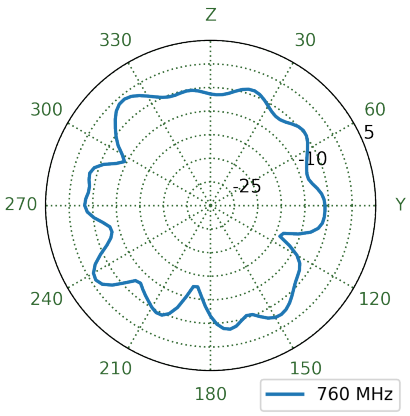
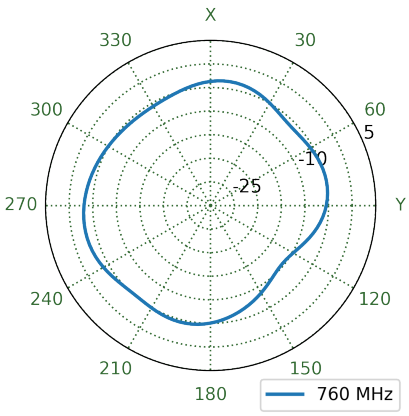
7.7 4G-5G 1 - Free Space Patterns at 760 MHz




XZ Plane	YZ Plane	XY Plane
		

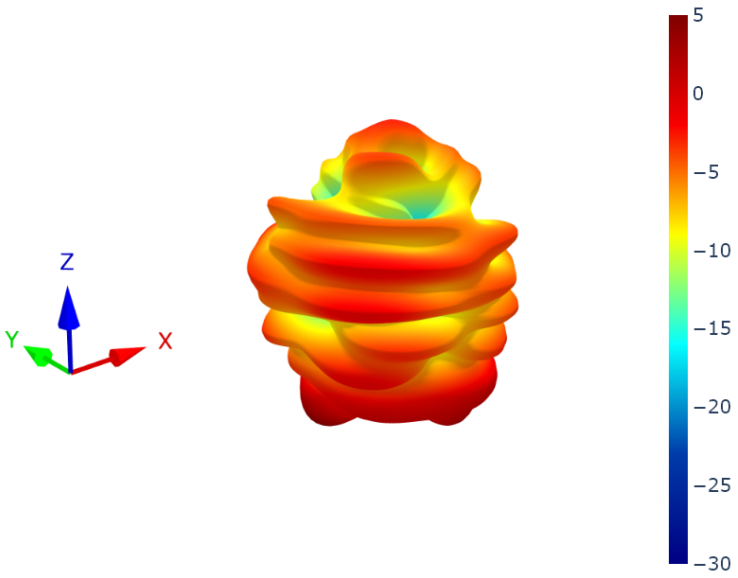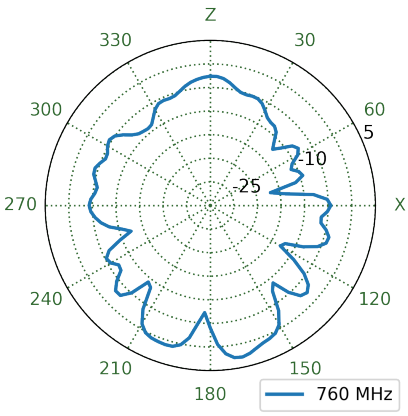
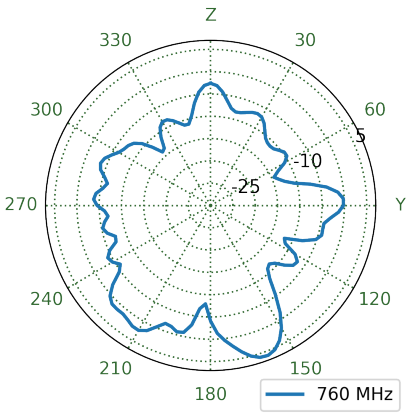
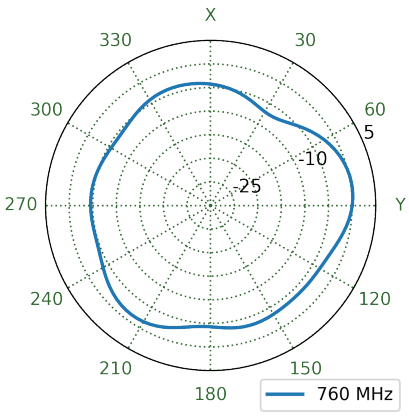
7.8 4G-5G 2 - 30x30cm Ground Plane Patterns at 760 MHz




XZ Plane	YZ Plane	XY Plane
		

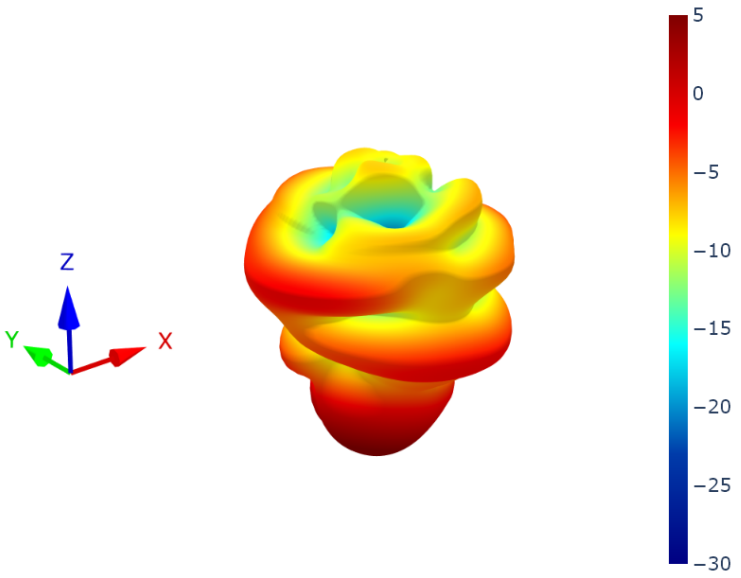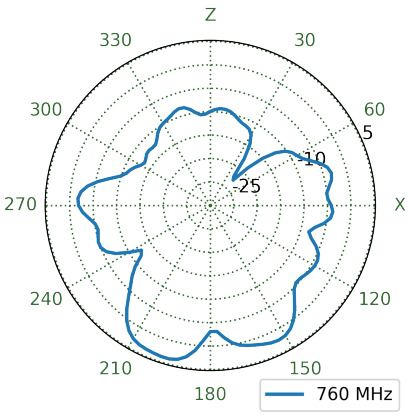
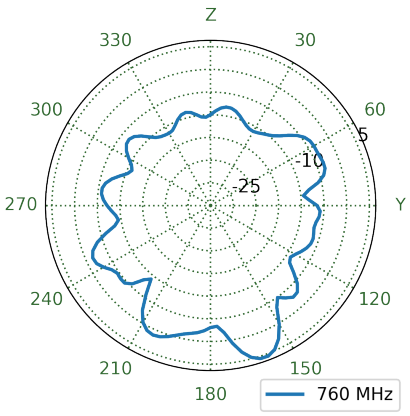
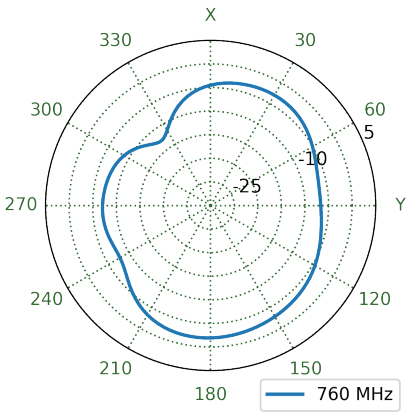
7.9 4G-5G 2 - Free Space Patterns at 760 MHz




XZ Plane	YZ Plane	XY Plane
		

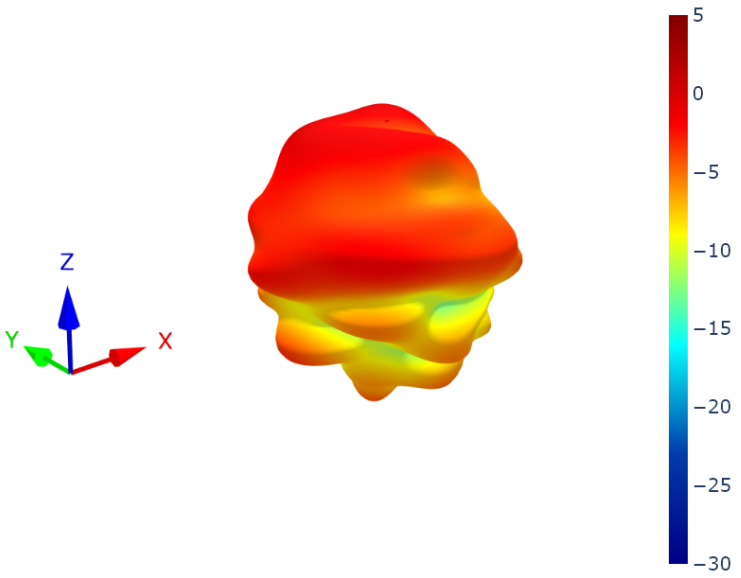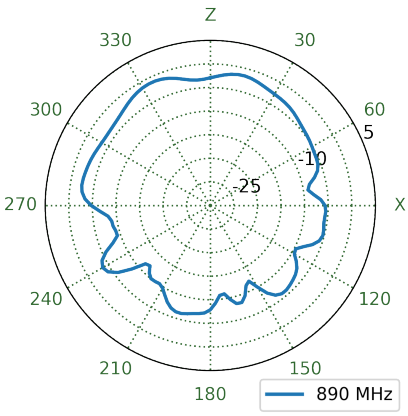
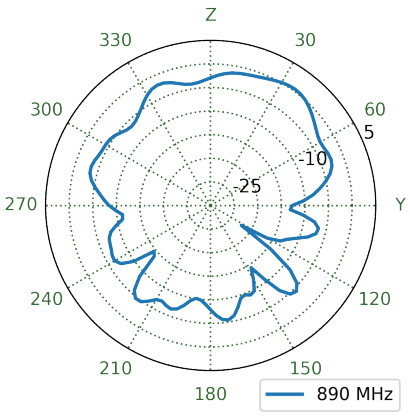
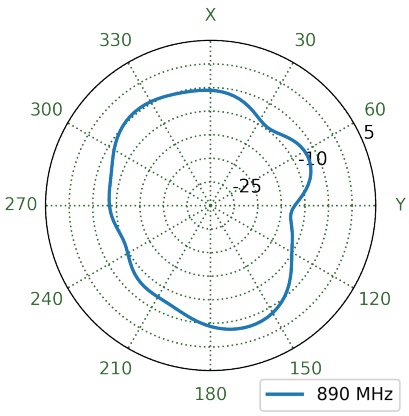
7.10 4G-5G 1 - 30x30cm Ground Plane Patterns at 890 MHz




XZ Plane	YZ Plane	XY Plane
		

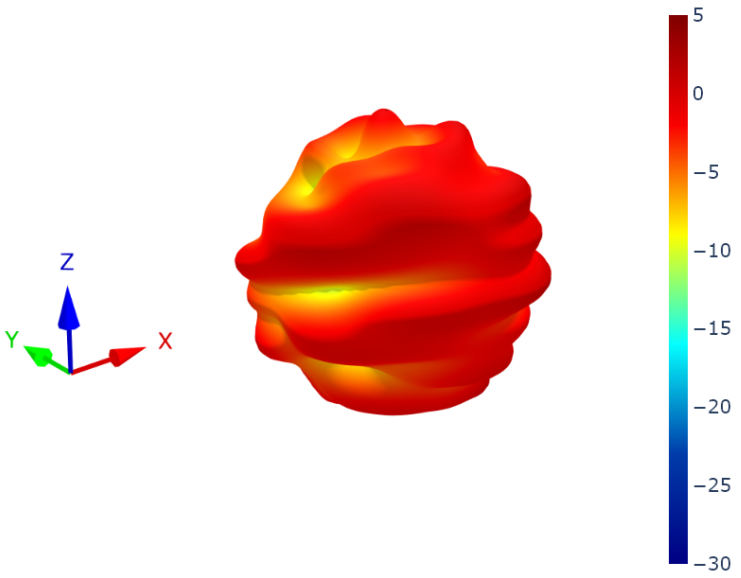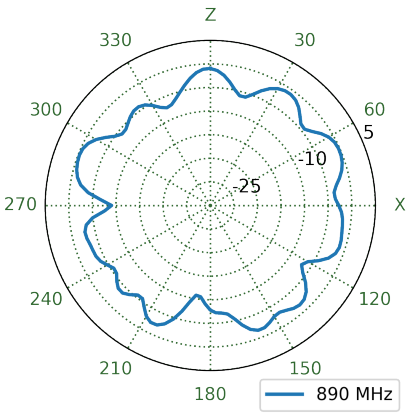
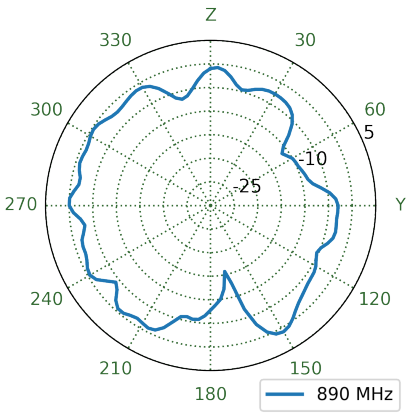
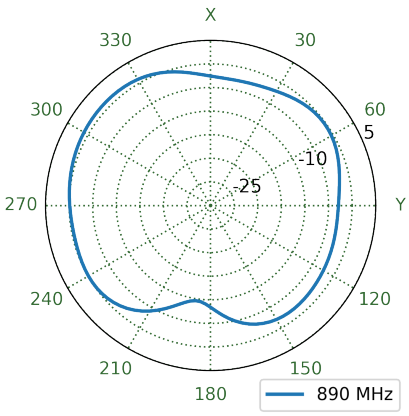
7.11 4G-5G 1 - Free Space Patterns at 890 MHz




XZ Plane	YZ Plane	XY Plane
		

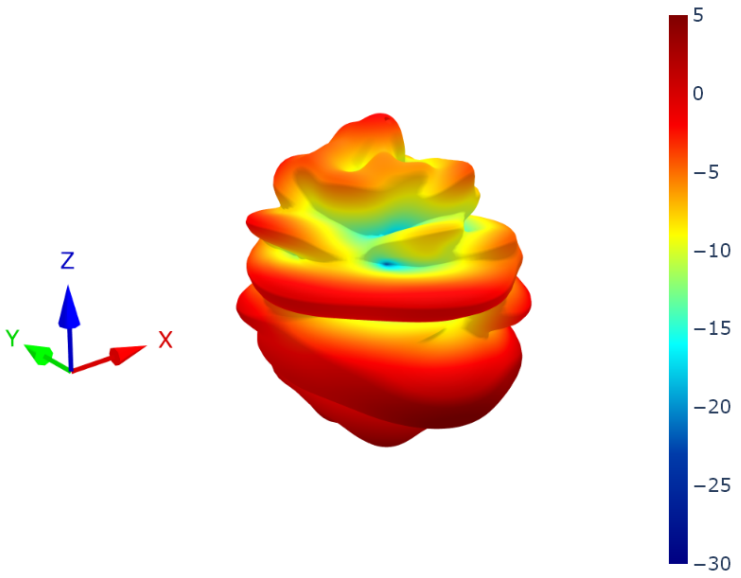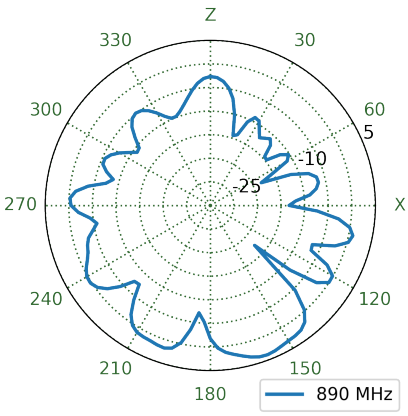
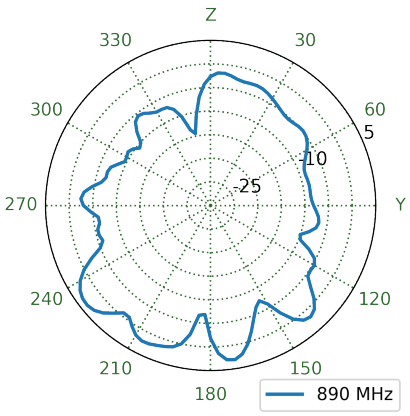
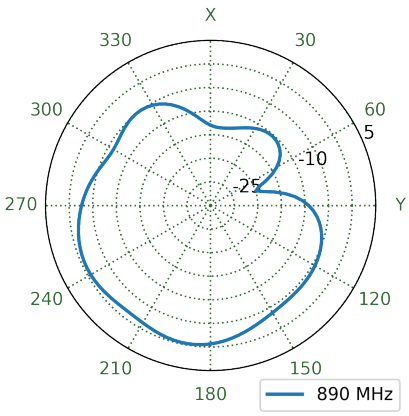
7.12 4G-5G 2 - 30x30cm Ground Plane Patterns at 890 MHz




XZ Plane	YZ Plane	XY Plane
		

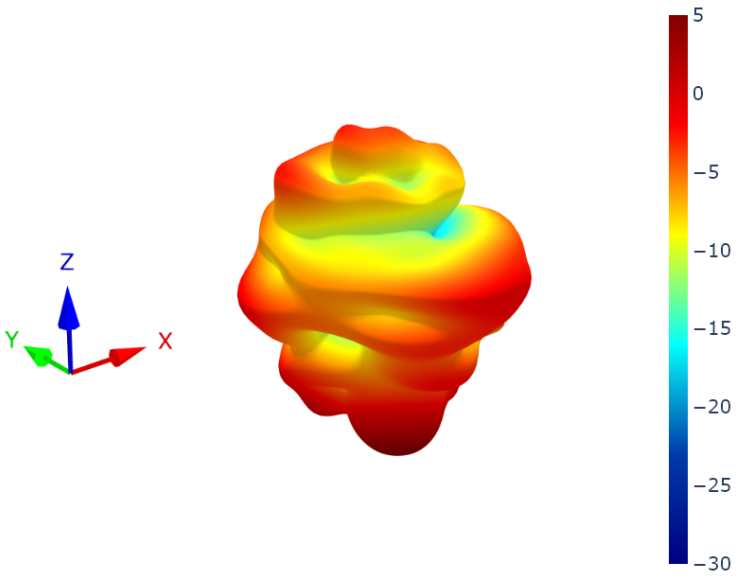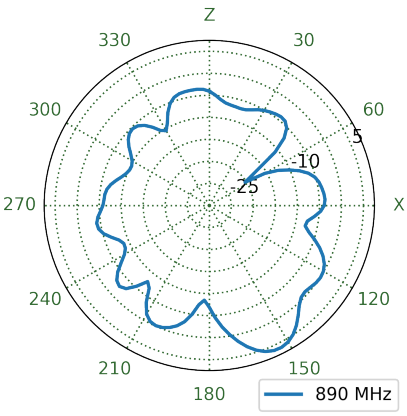
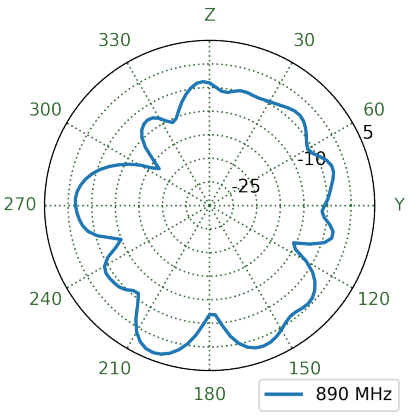
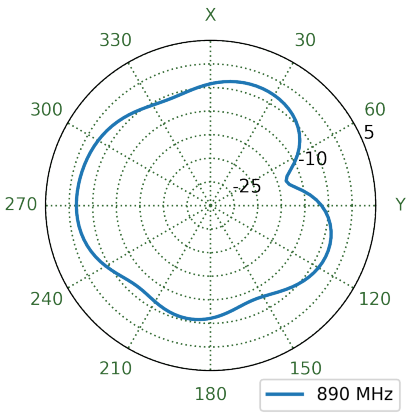
7.13 4G-5G 2 - Free Space Patterns at 890 MHz




XZ Plane	YZ Plane	XY Plane
		

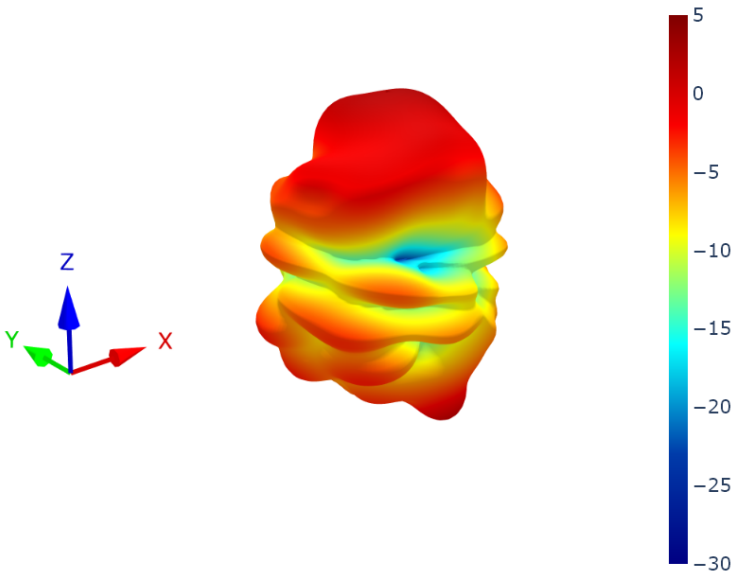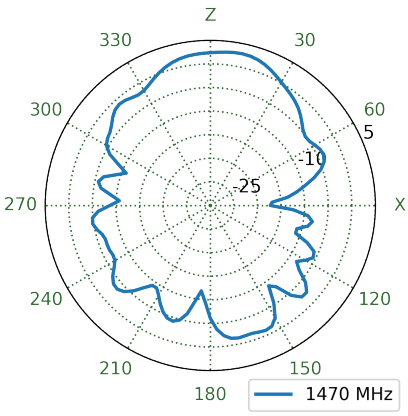
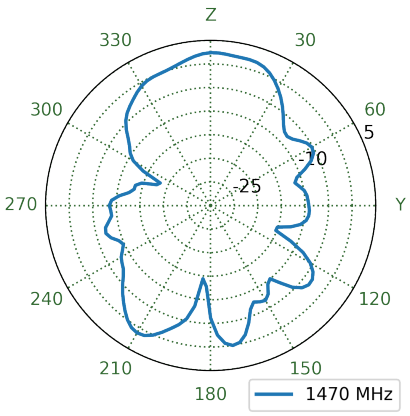
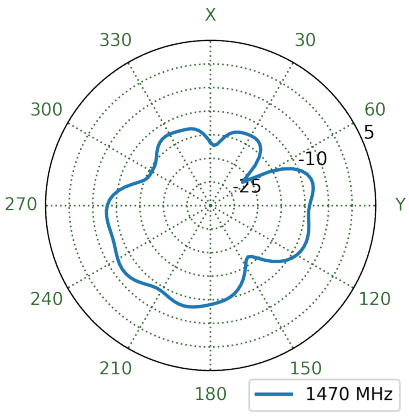
7.14 4G-5G 1 - 30x30cm Ground Plane Patterns at 1470 MHz




XZ Plane	YZ Plane	XY Plane
		

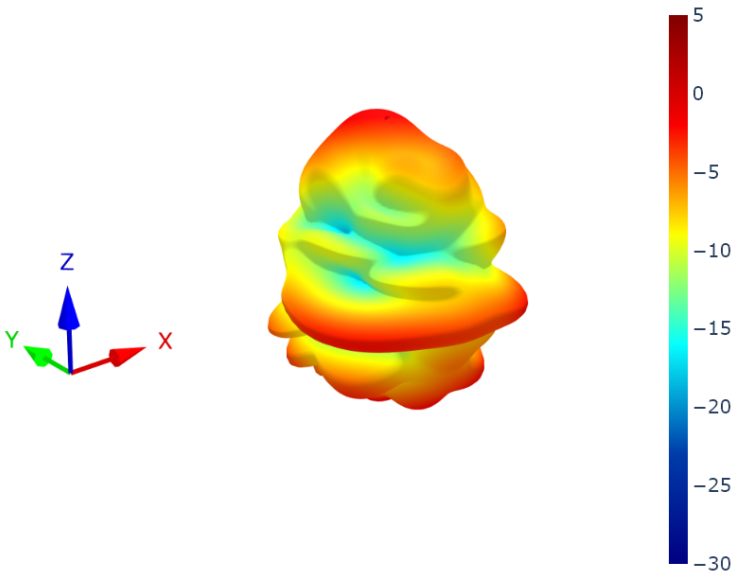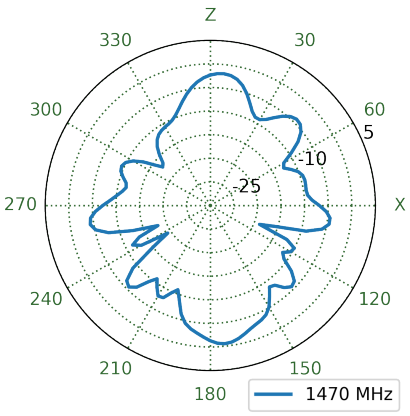
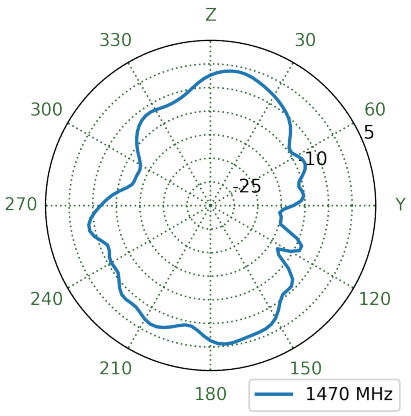
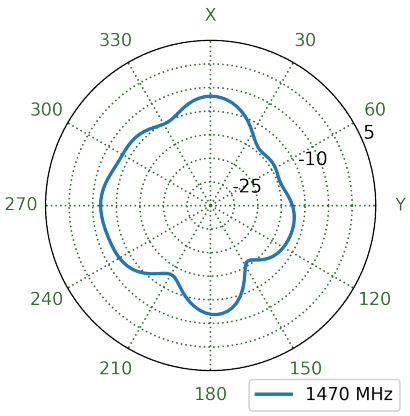
7.15 4G-5G 1 - Free Space Patterns at 1470 MHz




XZ Plane	YZ Plane	XY Plane
		

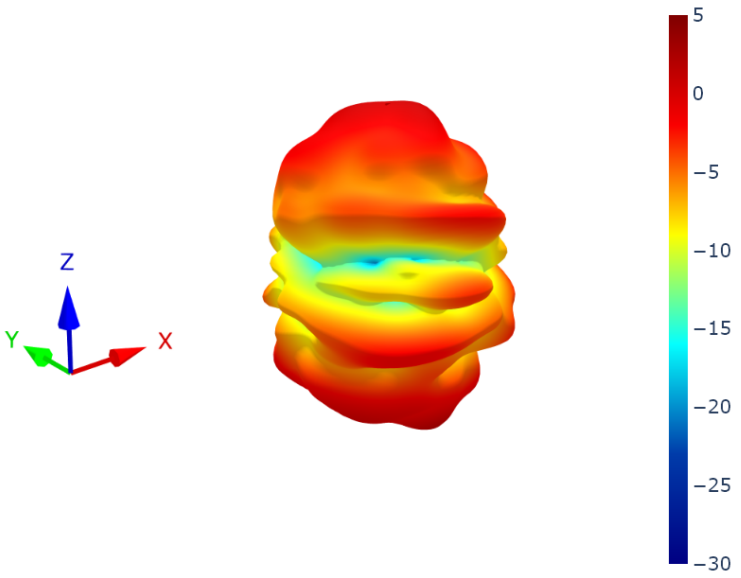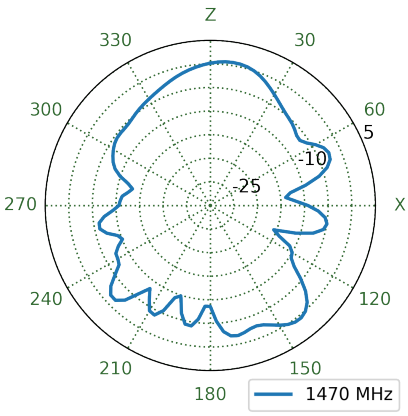
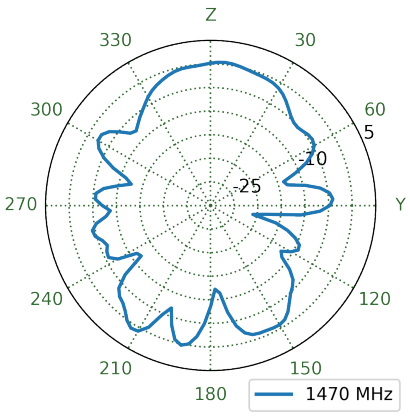
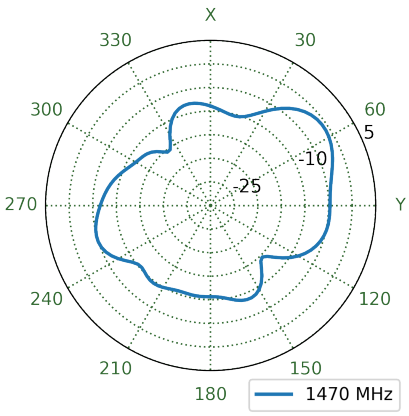
7.16 4G-5G 2 - 30x30cm Ground Plane Patterns at 1470 MHz




XZ Plane	YZ Plane	XY Plane
		

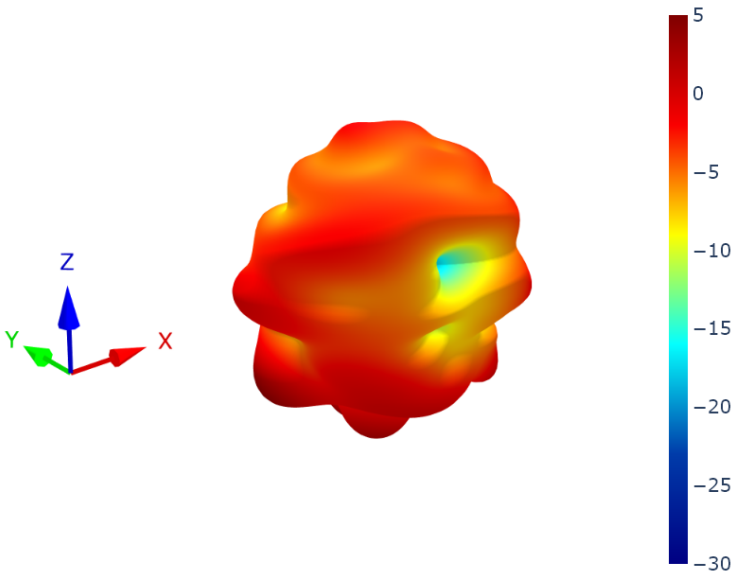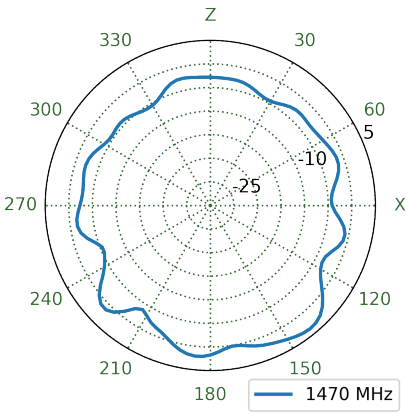
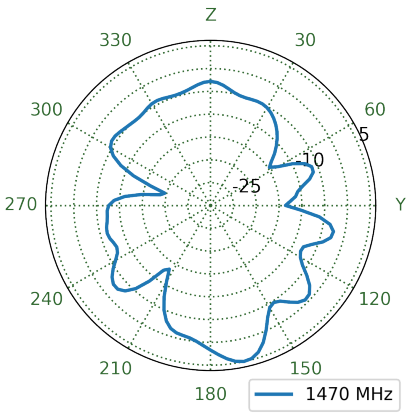
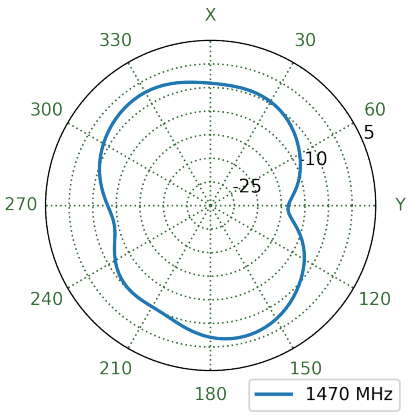
7.17 4G-5G 2 - Free Space Patterns at 1470 MHz




XZ Plane	YZ Plane	XY Plane
		

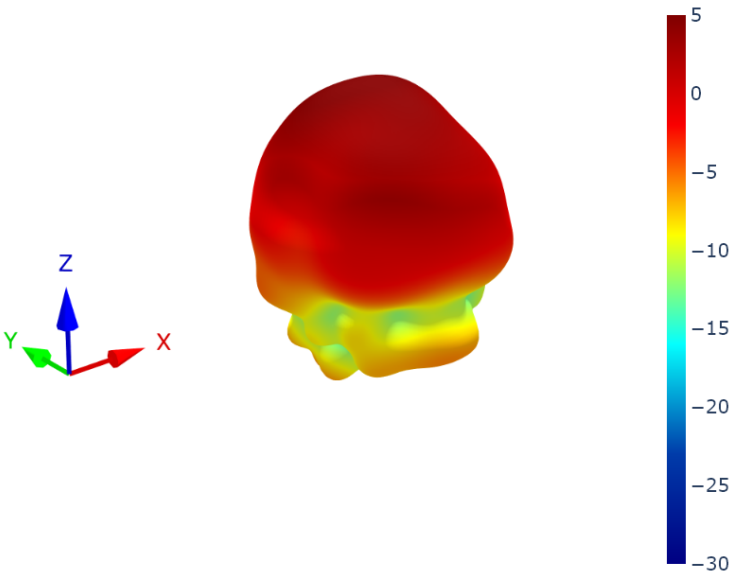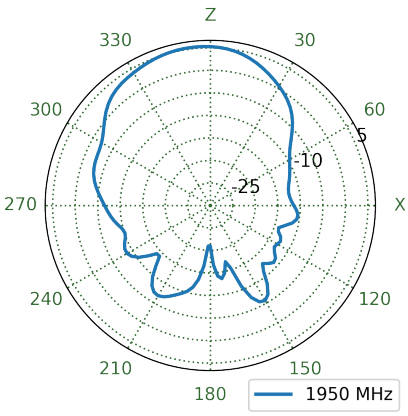
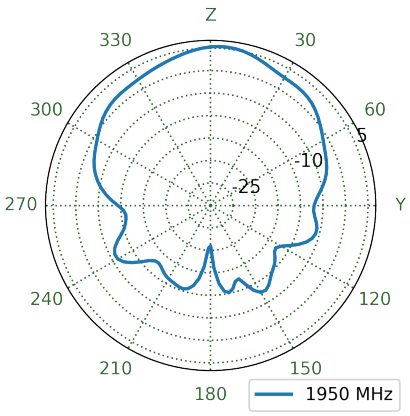
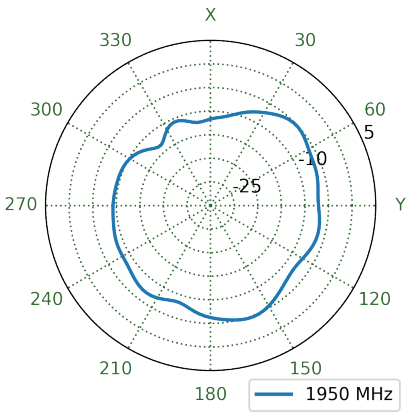
7.18 4G-5G 1 - 30x30cm Ground Plane Patterns at 1950 MHz




XZ Plane	YZ Plane	XY Plane
		

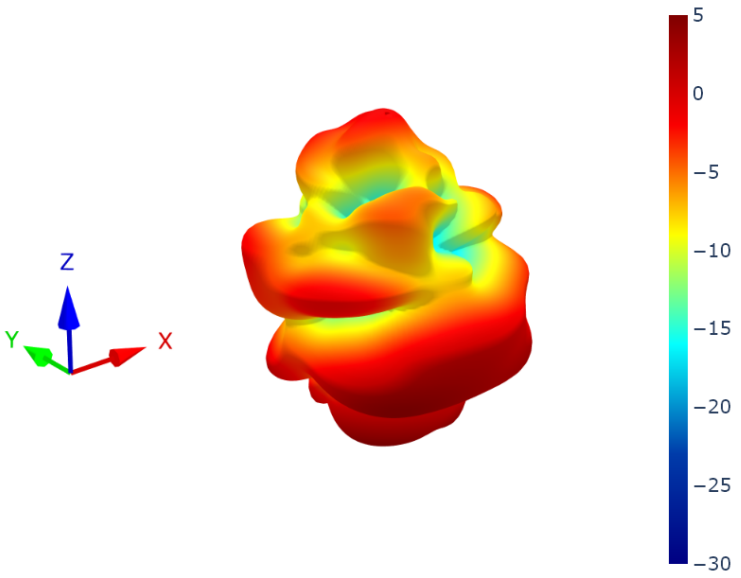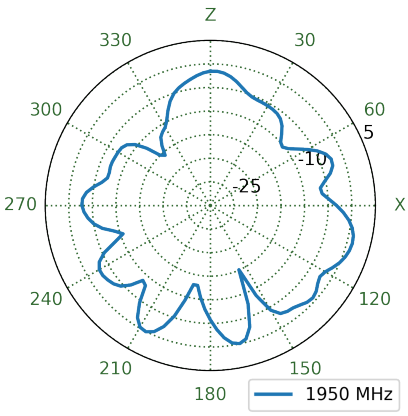
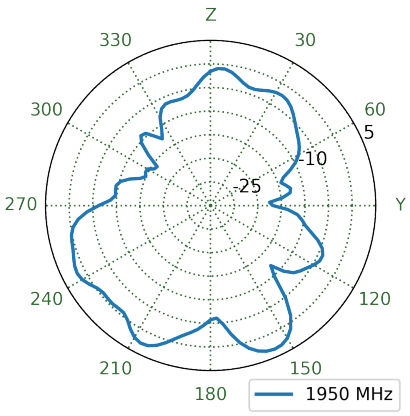
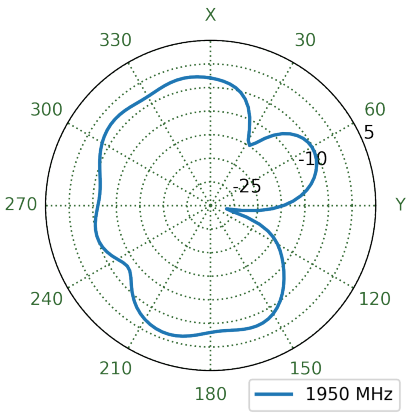
7.19 4G-5G 1 - Free Space Patterns at 1950 MHz




XZ Plane	YZ Plane	XY Plane
		

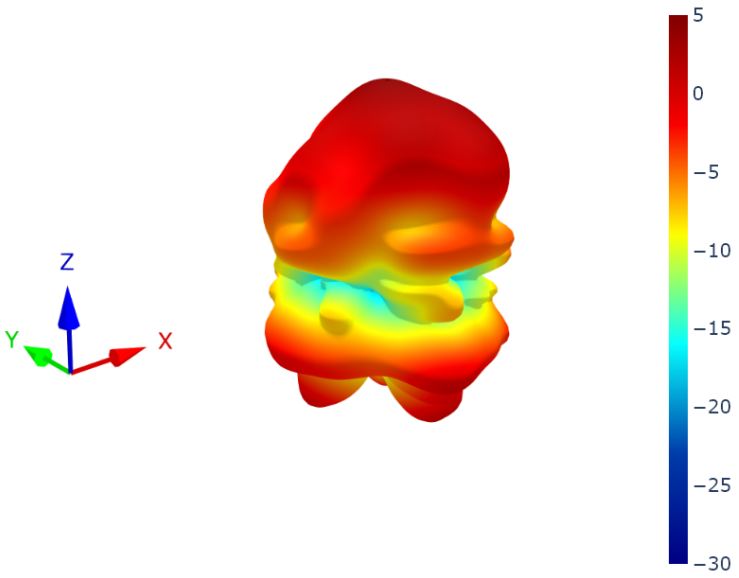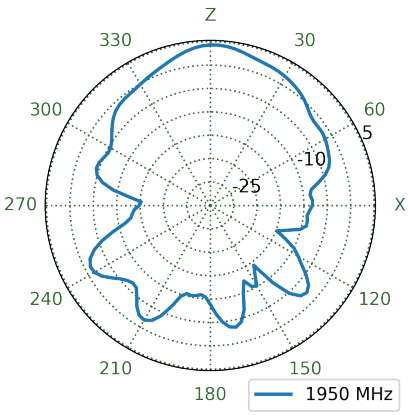
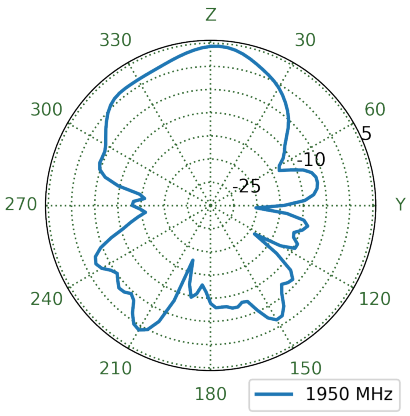
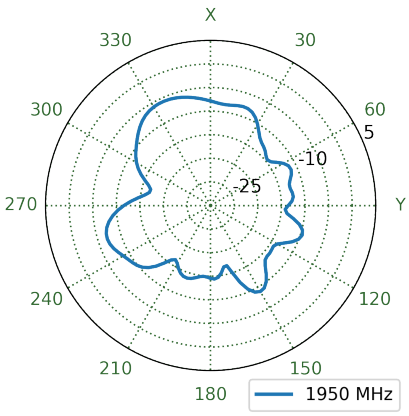
7.20 4G-5G 2 - 30x30cm Ground Plane Patterns at 1950 MHz




XZ Plane	YZ Plane	XY Plane
		

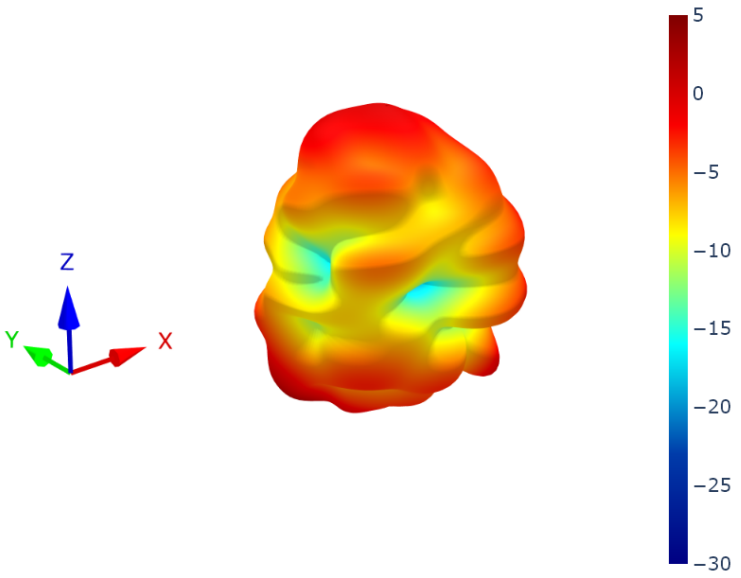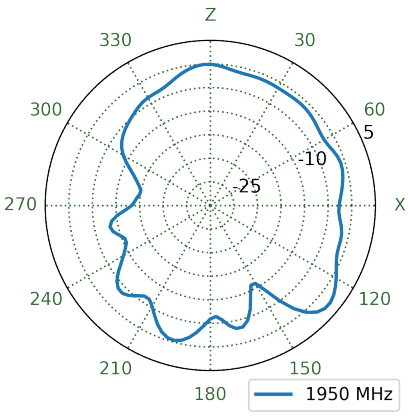
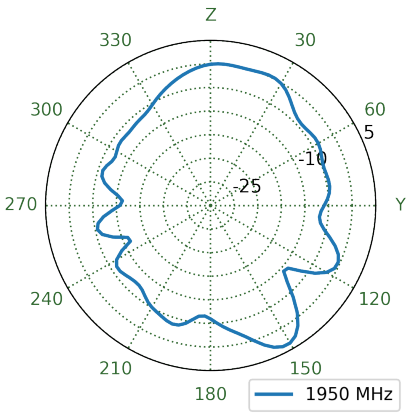
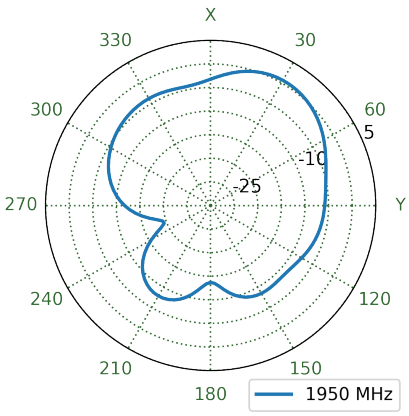
7.21 4G-5G 2 - Free Space Patterns at 1950 MHz




XZ Plane	YZ Plane	XY Plane
		

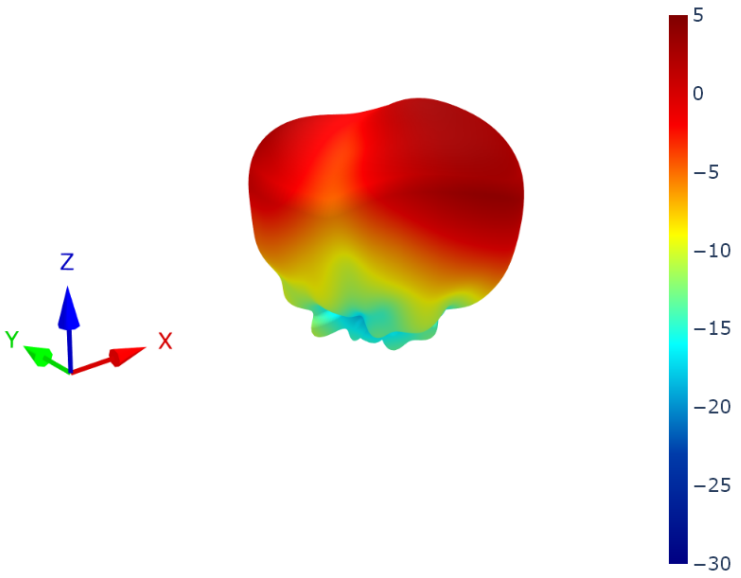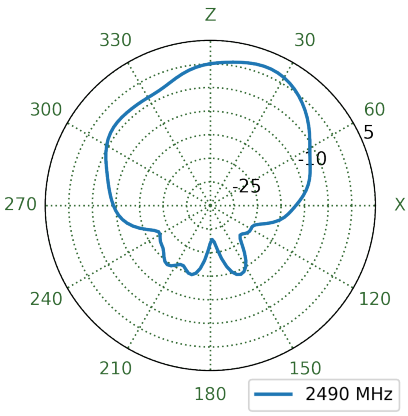
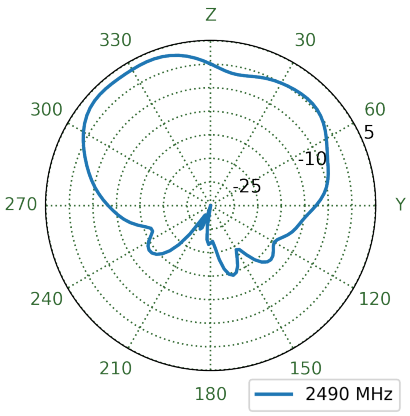
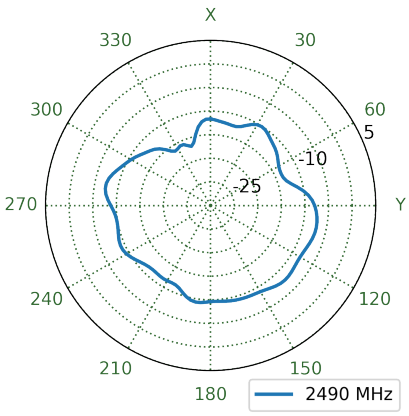
7.22 4G-5G 1 - 30x30cm Ground Plane Patterns at 2490 MHz




XZ Plane	YZ Plane	XY Plane
		

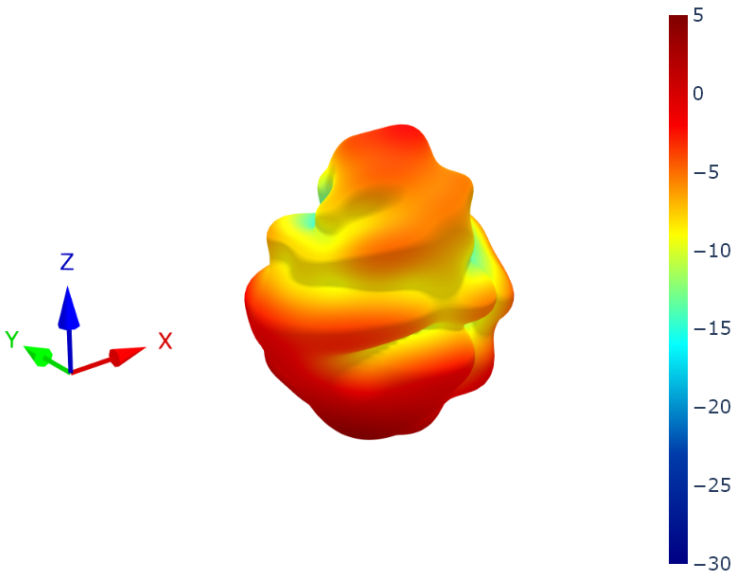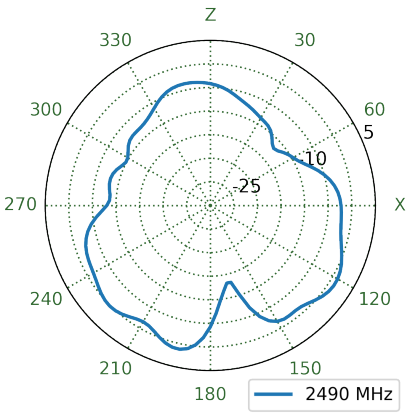
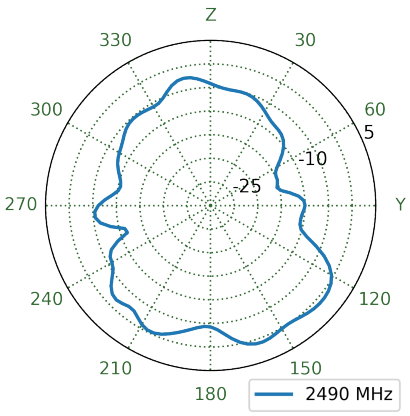
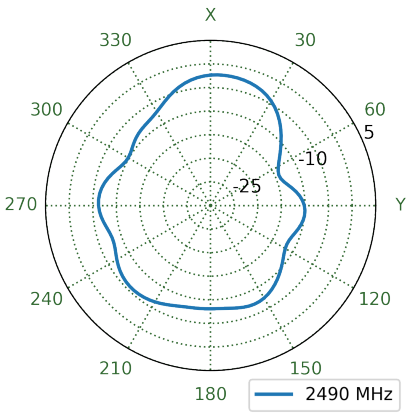
7.23 4G-5G 1 - Free Space Patterns at 2490 MHz




XZ Plane	YZ Plane	XY Plane
		

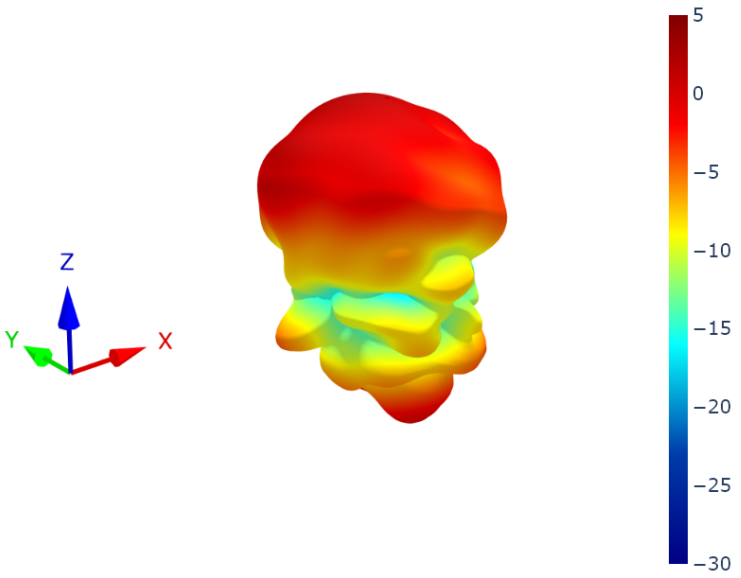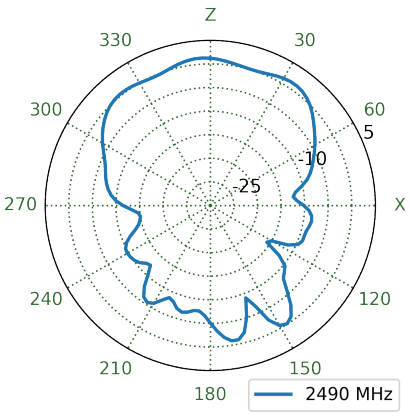
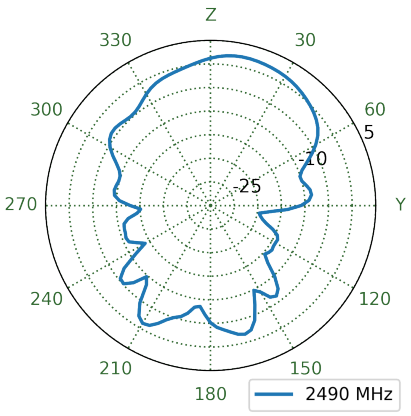
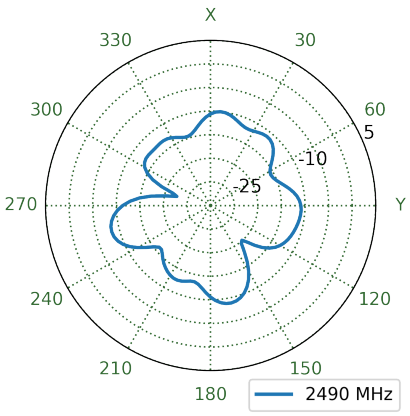
7.24 4G-5G 2 - 30x30cm Ground Plane Patterns at 2490 MHz




XZ Plane	YZ Plane	XY Plane
		

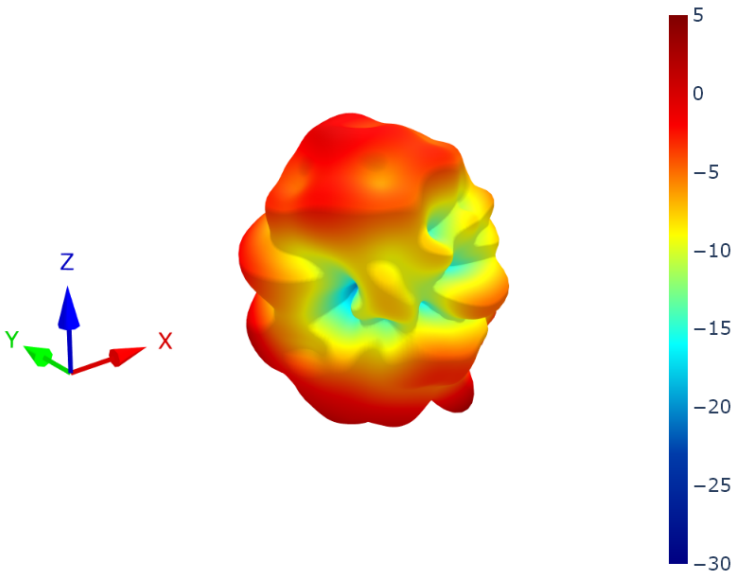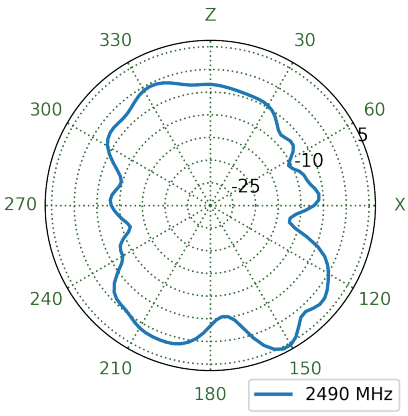
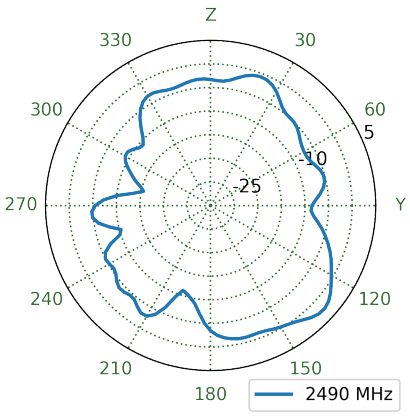
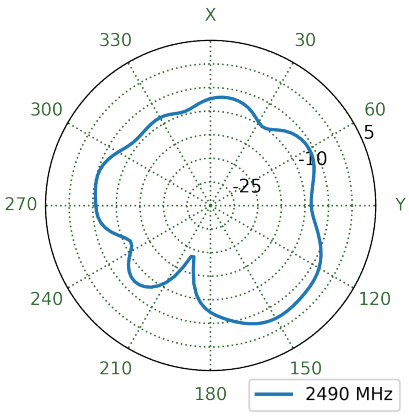
7.25 4G-5G 2 - Free Space Patterns at 2490 MHz




XZ Plane	YZ Plane	XY Plane
		

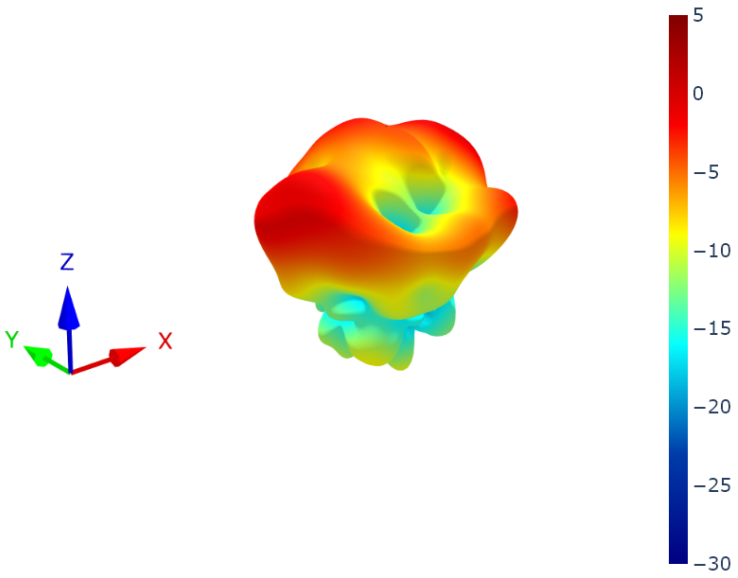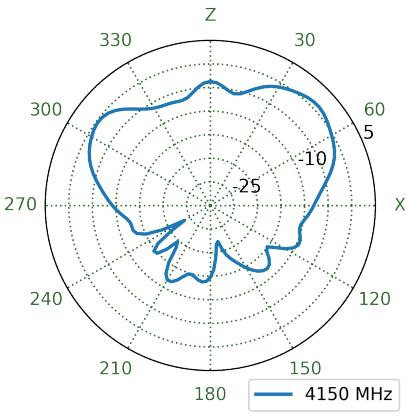
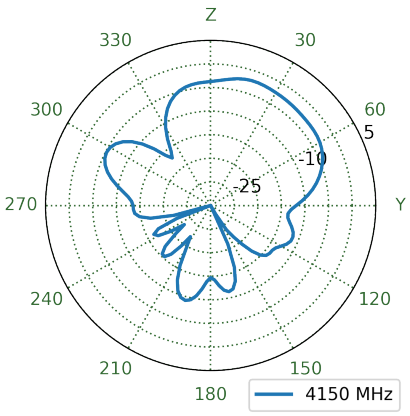
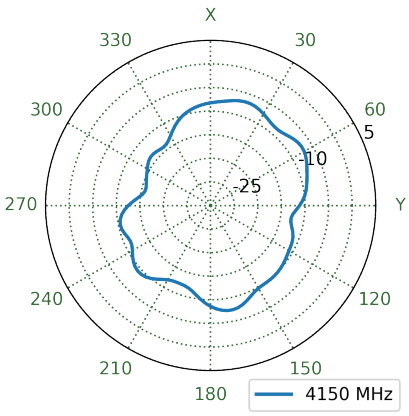
7.26 4G-5G 1 - 30x30cm Ground Plane Patterns at 4150 MHz




XZ Plane	YZ Plane	XY Plane
		

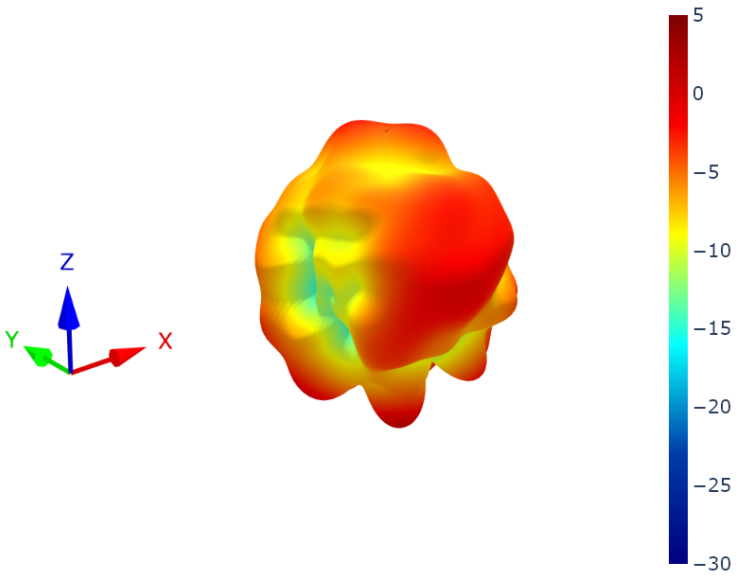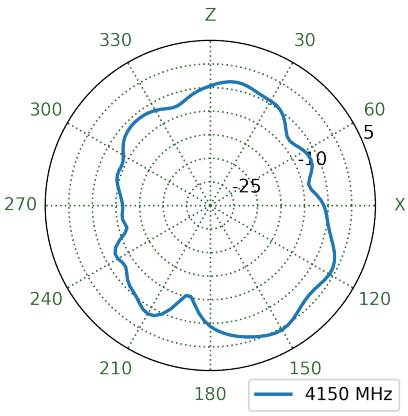
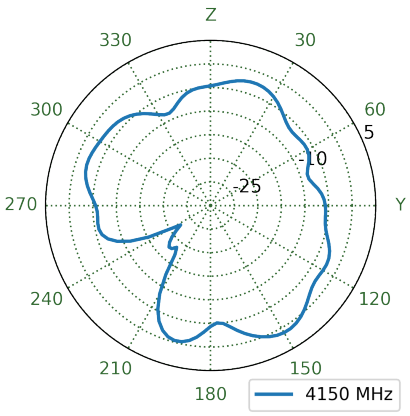
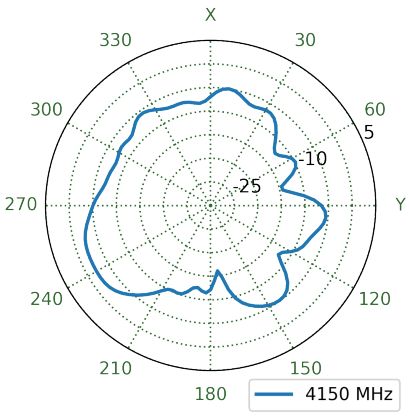
7.27 4G-5G 1 - Free Space Patterns at 4150 MHz




XZ Plane	YZ Plane	XY Plane
		

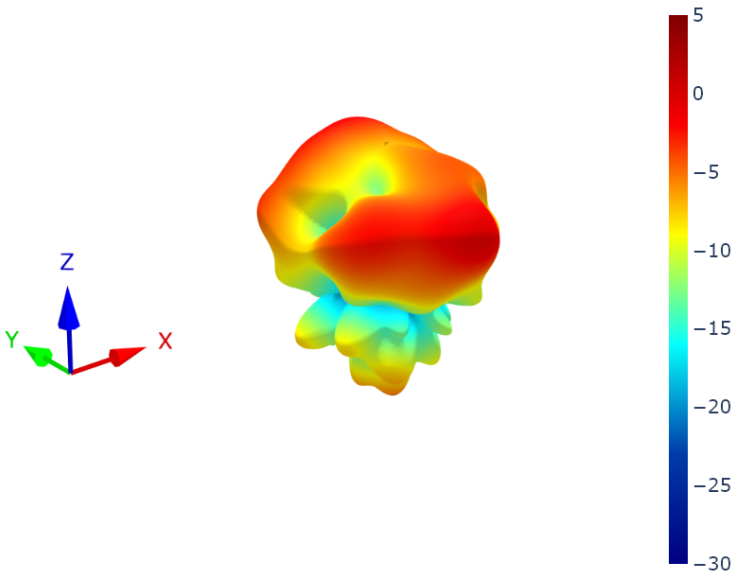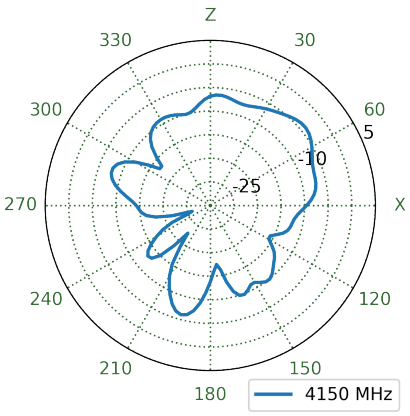
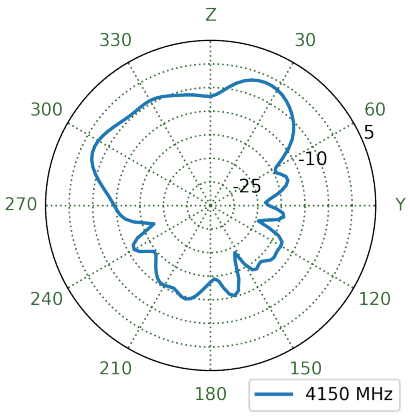
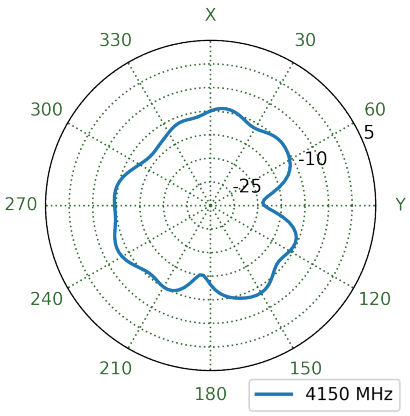
7.28 4G-5G 2 - 30x30cm Ground Plane Patterns at 4150 MHz




XZ Plane	YZ Plane	XY Plane
		

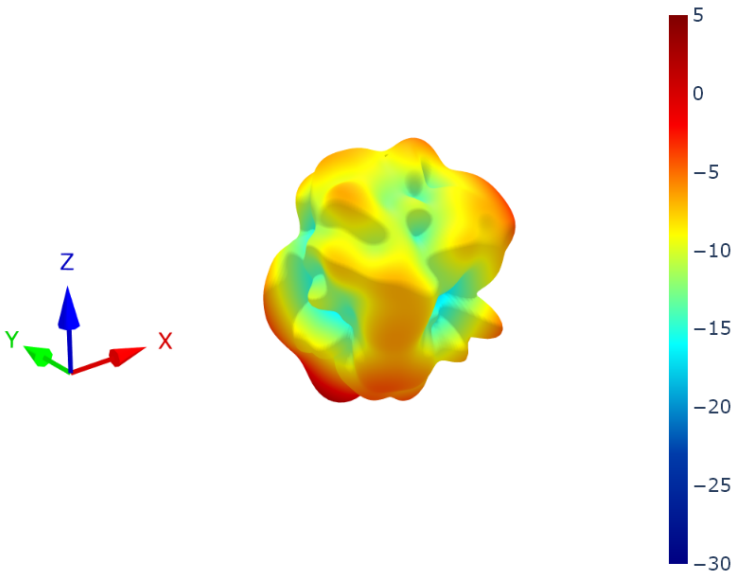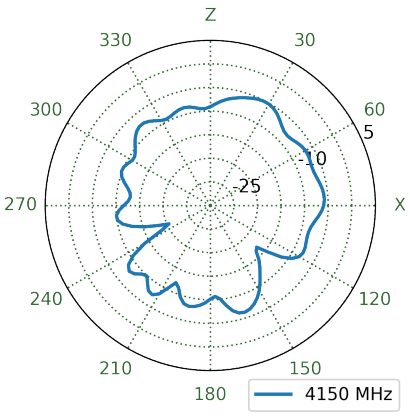
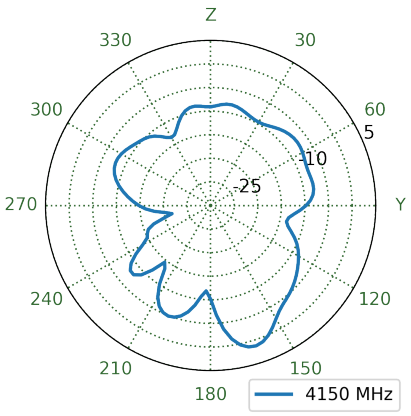
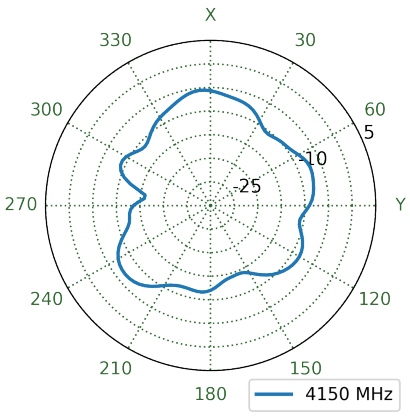
7.29 4G-5G 2 - Free Space Patterns at 4150 MHz




XZ Plane	YZ Plane	XY Plane
		

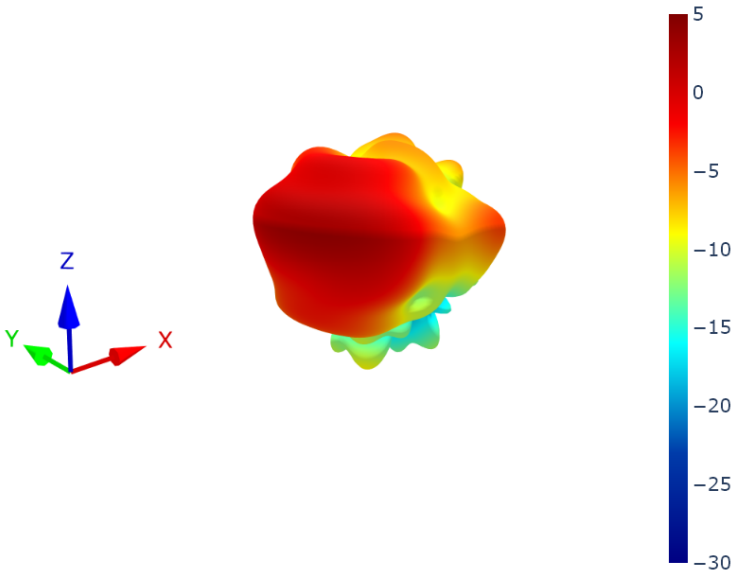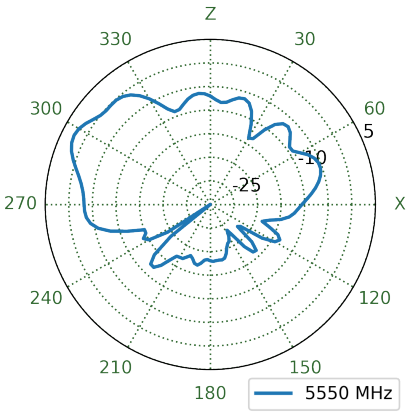
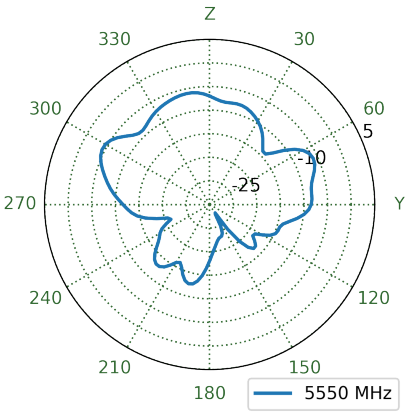
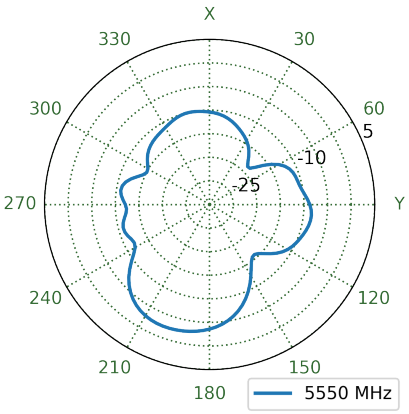
7.30 4G-5G 1 - 30x30cm Ground Plane Patterns at 5550 MHz




XZ Plane	YZ Plane	XY Plane
		

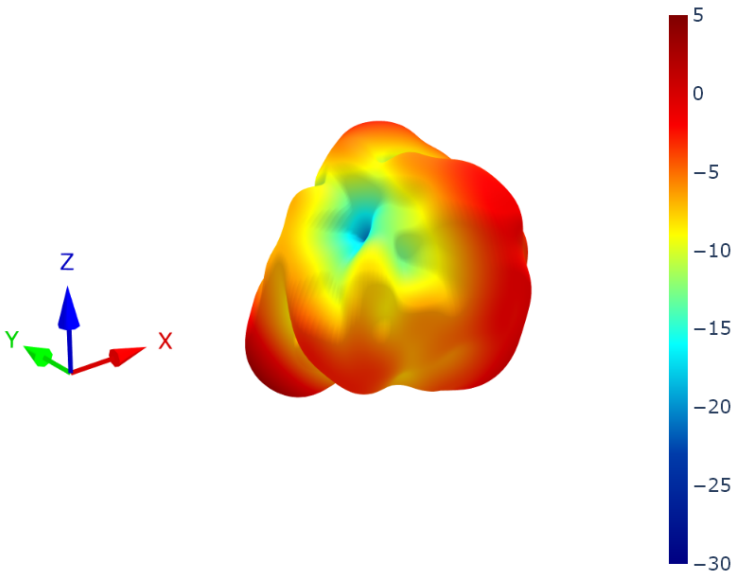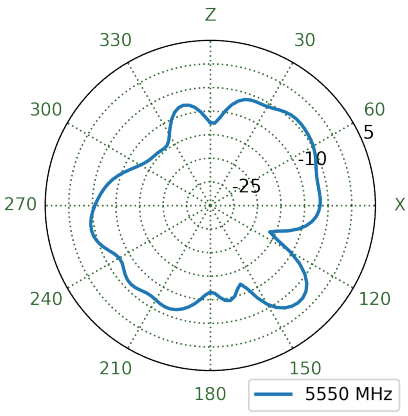
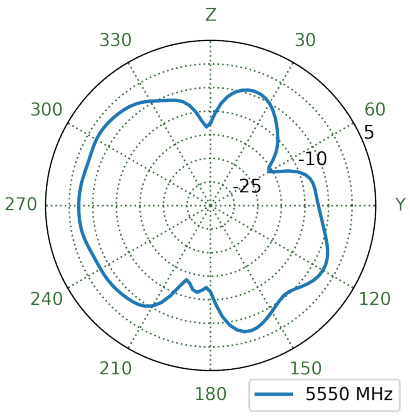
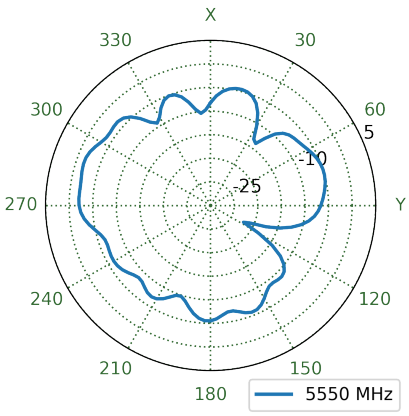
7.31 4G-5G 1 - Free Space Patterns at 5550 MHz




XZ Plane	YZ Plane	XY Plane
		

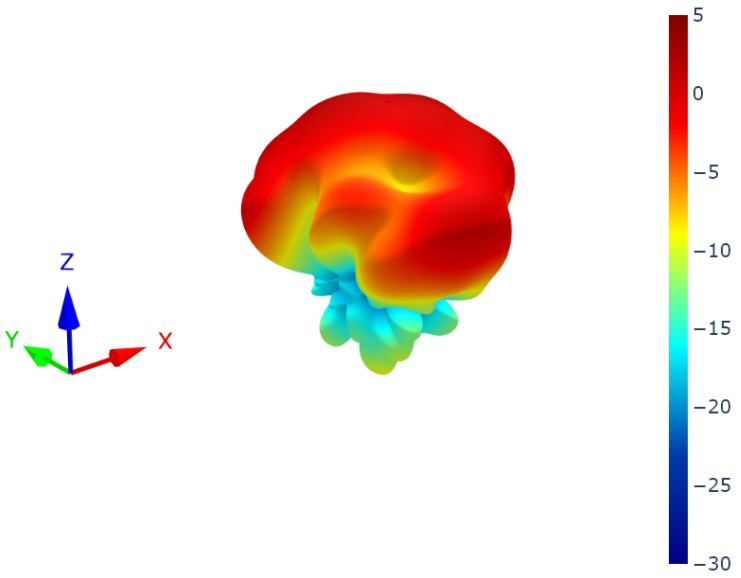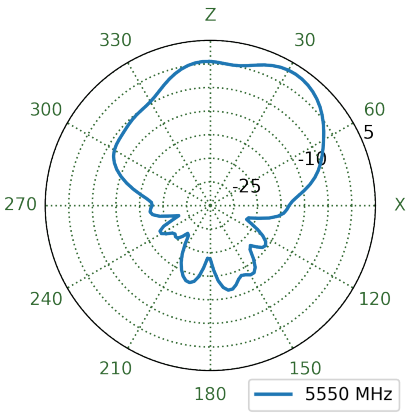
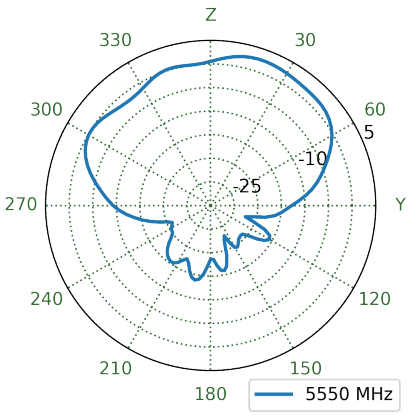
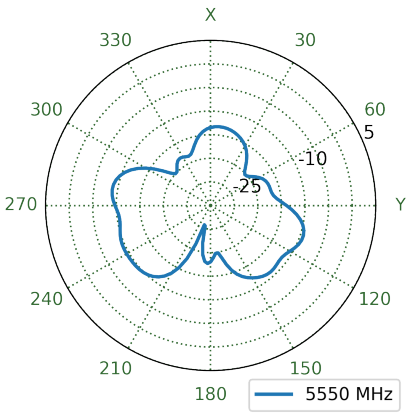
7.32 4G-5G 2 - 30x30cm Ground Plane Patterns at 5550 MHz



XZ Plane	YZ Plane	XY Plane
		

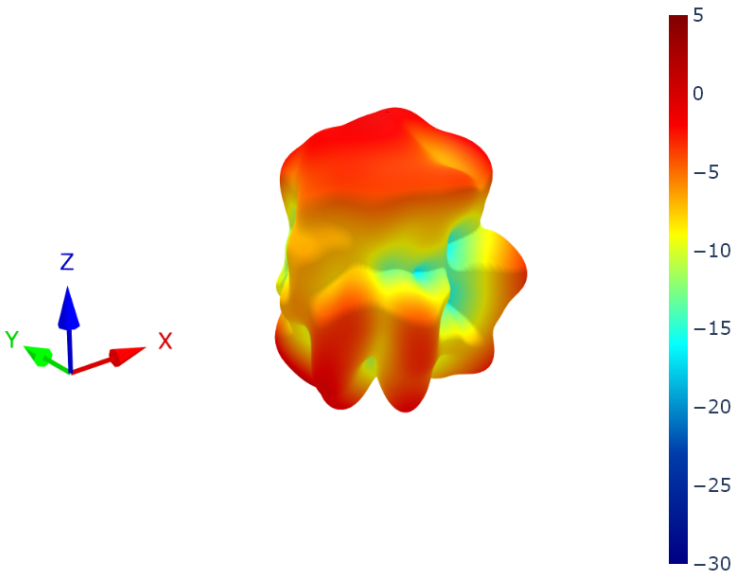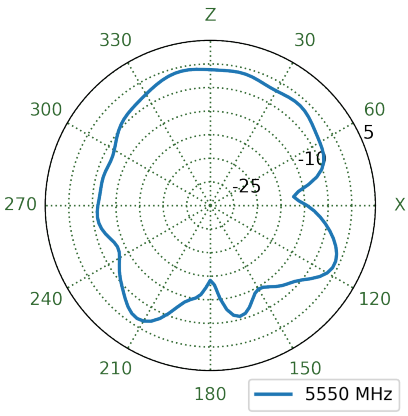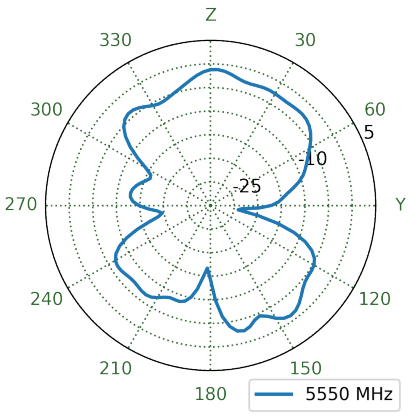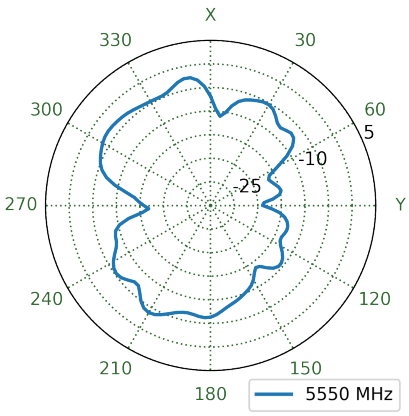7.33 4G-5G 2 - Free Space Patterns at 5550 MHz



XZ Plane	YZ Plane	XY Plane
		

Changelog for the datasheet

SPE-25-8-193 – MA582.A.001_MA582.W.001

Revision: A (Initial Release)	
Date:	2025-07-14
Notes:	Initial Datasheet Release
Author:	Gary West

Previous Revisions

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Antennas ***category:***

Click to view products by Taoglas ***manufacturer:***

Other Similar products are found below :

930-033-R A09-F8NF-M 108-00016-050 W1049B090 WTL2449CQ1-FRSMM 0600-00060 GD53-25 S9025PLSMF GPSCPMM00 ANT-WP868SMA-Y CBNC58 MD10-004 ABFT LP800NMOW NMOQ88C NMOQB NMOQC ANT-GSMGPSPUKS 60210 60140 ANT-8WPIG-UFL ANT-GPSPUKS A21H0 29000863 EXD450TN 2.4GHz 2dBi-1.13-L=50mm 3E0702BK-005 22100003 DL-T022-2.4G DL-T023-4G T1-915M DL-T021-2.4GW DL-T021-2.4G KH-IPEX-1.13 BWGNSCNX16-6B1Y2L120 BWGNSCNX15-15B1Y4L120 DL-T023-4GW 3N0401LG-021 KHA(RG1.13)-TX90B-IPEX KHA(RG1.13)-TX80B-IPEX KH-137-TX90B-IPEX4 KH-113-TX100B-IPEX4 KH-113-TX60B-IPEX4 KH-081-TX300-IPEX 3K0001BK00-001 3K0001BK00-002 3N0401LG-038 3N0401BK-049 PRO-OB-440 DL-F8-5G