



TAOGLAS®



Datasheet

RJ45 Modular Jack 8P8C Cat5E

Part No:
TMJPD561188AG1A5DB6

Description:
1G Base-T Single Port RJ45 without magnetics.
Tab-UP with right angle THT mount and LED

Features:
Shielded
LED
Industrial grade

1. Specifications	3
2. Mechanical	4
3. Electrical	5
4. Packaging	6
<hr/>	
Changelog	7

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein. Reproduction, use or disclosure to third parties without express permission is strictly prohibited.



1. Specifications

Electrical Specifications	
Voltage	125 VAC RMS
Current Rating	1.5 AMP
Dielectric Strength	1000 VAC Rms 50hz or 60hz,1min.
Insulation Resistance	500 Mega Ohms Min. Initial After 500v Dc For 1 Minute
Contact Resistance	Single Terminal 30 Milli Ohms Max. Initial 50 Milli Ohms Max. After Durability Test


Mechanical Specifications	
Durability	750 Cycles Min,12.5mm/Minute
Insertion Force	2.2kg.F Max.
Retention Strength	7.7kg.F Between Jack and Plug

Material Specifications	
Housing	PA9t, UL94V-0, Black
Terminal	Phosphor Bronze $\varnothing=0.35\text{mm}$, 30u" Gold Plating on Contact Area
Shield	C2680, T=0.20mm, 20u" Min Nickel Plating on All Area.

Environmental Specifications	
Operating Temperature	-40°C TO +85°C
Storage Temperature	-40°C TO +85°C


2. Mechanical

2.1 Mechanical Drawings

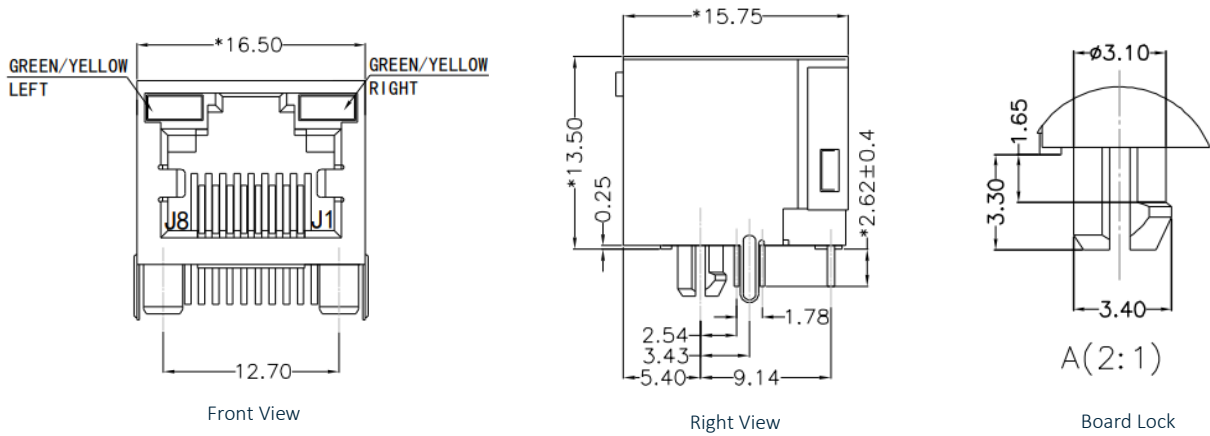


Mechanical Specifications	
Height	13.50 mm
Width	16.50 mm
Depth	15.75 mm
Weight	4.08 g
Mounting Style	Through Hole (THT)
Mounting Angle	Right Angle

Dimensions are in millimeters with the following tolerances: X.XX = ± 0.25



Bottom View

2.2 PCB Layout

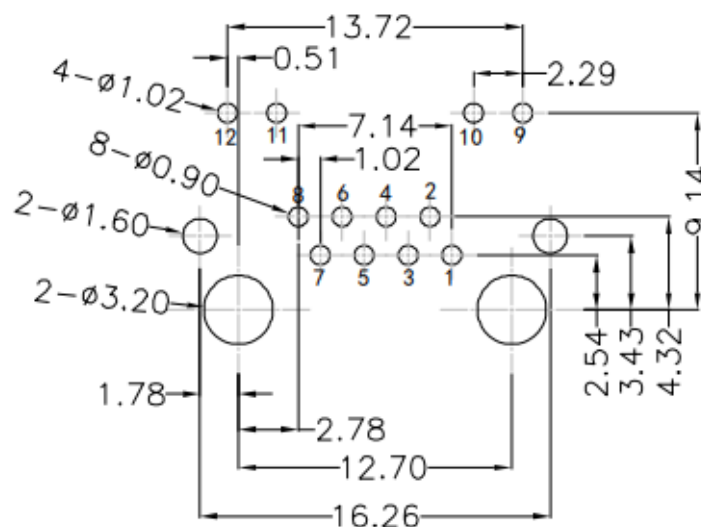


Suggested PCB Layout (Top View)

Dimensions are in millimeters with the following tolerances: X.XX = ± 0.10


3. Electrical

3.1 LED and Performance

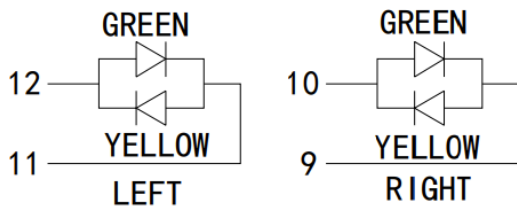


LED Specification

Standard LED Color	LED Wavelength	Foward(A)	Foward(V)
Green	568nm	20mA	1.85-2.45V
Yellow	585nm	20mA	1.7-2.2V

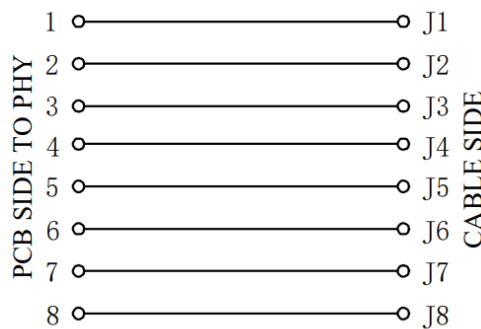

3.2 Profile of Wave Solder

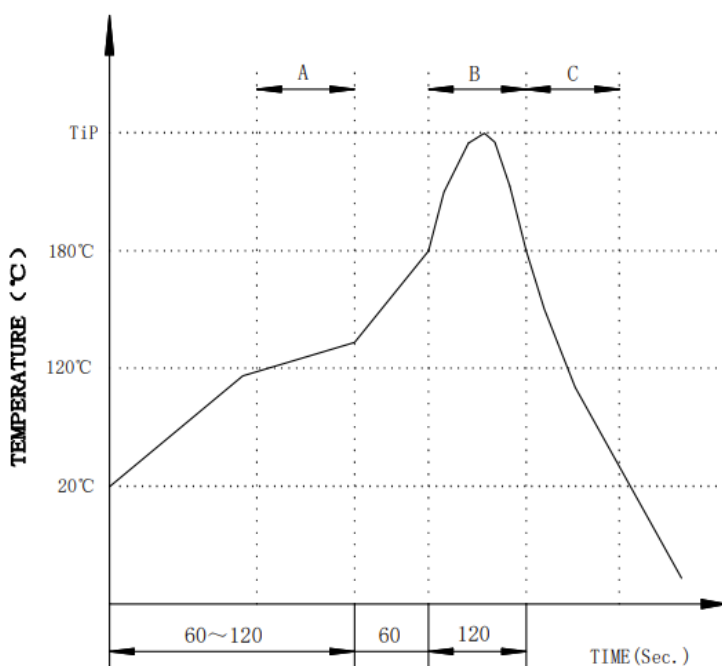

A.Preheating B.Soldering C.Gradual Cooling
 Tip temperature:260±5°C.
 Tip temperature time:5Sec Max.
 Tip melting point of Sn96.5/Ag3/Cu0.5:217°C.

Remarks: after wave soldering, the plastic positioning columns of the product which under the PCB will be slightly melted, but it won't affect its function.

4. Packaging

4.1 SPQ

100 pcs/tray

Tray dimension: 185*260*170 mm

Tray Weight: 0.472 kg

4.2 Carton

1 Carton = 33 trays = 3300 pcs

Carton dimensions: 570*270*210 mm

Carton Weight: 17 kg



4.3 Label

Taoglas Limited	
P/N NO: XXXXXXXX	
QYT: XXX PCS	DC: XXXX
DATE: XXXX-XX-XX	

SPQ Label (8x4cm)

Taoglas Limited	
P/N NO: XXXXXXXX	
PO: XXXXXXXX	B/N: XXXXXXXX
QYT: XXX PCS	DC: XXXX
DATE: XXXX-XX-XX	

Carton Label (8x4cm)

Changelog

Changelog for the datasheet

SPE-24-8-033 – TMJPD561188AG1A5DB6

Revision: A (Original First Release)

Date:	2024-03-31
Notes:	
Author:	Javier Vasena

Previous Revisions



www.taoglas.com



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Modular Connectors](#) / [Ethernet Connectors](#) category:

Click to view products by [Taoglas](#) manufacturer:

Other Similar products are found below :

[04.070.0480](#) [04.090.0880](#) [0424104168](#) [0424108362](#) [0432236028](#) [0432238022](#) [0441700003](#) [075-8516-000](#) [075-8517-000](#) [0811-2X4R-28-F](#)
[0813-1X1T-23-F](#) [0813-1X1T-57-F](#) [0816-1X1T-23-F](#) [0820-1X1T-00-F](#) [0821-1X1T-32-F](#) [0821-1X1T-36-F](#) [0821-1X1T-43-F](#) [0826-1A1T-23-F](#)
[0826-1C1T-23-F](#) [0826-1C1T-43-F](#) [0826-1D1T-23-F](#) [0826-1G1T-23-F](#) [0826-1G1T-43-F](#) [0826-1K1T-23-F](#) [0826-1K1T-43-F](#) [0826-1L1T-23-F](#)
[0826-1L1T-57-F](#) [0826-1L4T-23-F](#) [0826-1X1T-23-F](#) [0826-1X1T-32-F](#) [0826-1X1T-43-F](#) [0826-1X1T-57-F](#) [0826-1X1T-80-F](#) [0826-1X1T-GH-F](#)
[0826-1X1T-GJ-F](#) [0826-1X1T-HS-F](#) [0826-1X1T-HT-F](#) [0826-1X1T-JKB-F](#) [0826-1X1T-JK-F](#) [0826-1X1T-KH-F](#) [0826-1X1T-KL-F](#)
[0826-1X1T-M1-F](#) [0826-1X2T-23-F](#) [0826-1X2T-43-F](#) [0826-1X4T-23-F](#) [0826-1X4T-43-F](#) [0826-1X4T-GH-F](#) [0826-1X4T-HS-F](#) [0833-2X4R-54-F](#) [0833-2X6R-54-F](#)