

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20

© COPYRIGHT 20

BY -

ALL RIGHTS RESERVED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	B	ECR-15-014706	09OCT2015	DL	CW
	B1	ECR-15-016505	11NOV2015	DL	CW
	B2	ECR-16-009730	06JUL2016	BS	CW
	B3	ECR-16-018198	13FEB2017	QY	CW

NOTES:

- TECHNICAL CHARACTERISTICS:
INSULATION MATERIAL: PC
RATED VOLTAGE: 400 V
RATED CURRENT: 16 A
INSULATION RESISTANCE: $\geq 400M\Omega$
RATED IMPULSE VOLTAGE: 4 KV
POLLUTION DEGREE: 3
FLAMMABILITY: UL94V-0
MATING CYCLES: 500 CYCLES
WIRE RANGE: 0.14-4.0 mm² (26-12 AWG)
CONTACT TYPE: CRIMP CONTACT
- CONTACT NEED TO BE ORDERED SEPARATELY.
(ORDER No. REFER TO DRAWING: T20300X20XX000)

注释:

- 技术参数:
绝缘材料: PC
额定电压: 400V
额定电流: 16A
绝缘电阻: $\geq 400M\Omega$
额定脉冲电压: 4 KV
污染等级: 3
阻燃等级: UL94V-0
插拔次数: 500次
接线范围: 0.14-4.0 mm² (26-12 AWG)
接线类型: 冷压接
- 端子需要单独订购.
(订货号参考图面: T20300X20XX000)

M3 SCREW
RECOMMENDED
TIGHTENING
TORQUE 0.2Nm
M3螺丝 推荐锁紧力矩0.2Nm

31.4

40.1


M3 SCREW RECOMMENDED
TIGHTENING TORQUE 0.2Nm
M3螺丝 推荐锁紧力矩0.2Nm

TYPE-1: T2080052201-000 TE LOGO
类型-1: T2080052201-000 TE LOGO

TYPE-2: T2080052201-001 STAINLESS STEEL SCREW, TE LOGO
类型-2: T2080052201-001 不锈钢螺丝, TE LOGO

GROUNDING CONTACT TYPE: SCREW CONTACT
GROUNDING CONTACT FINISH: SILVER PLATED
WIRE RANGE: 2.5mm (AWG14)
接地端子类型: 螺丝连接端子 / 接地端子表面处理: 镀银 / 接线范围: 2.5mm² (AWG14)

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
mm	
	0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±
MATERIAL	FINISH
-	-
-	-

DWN	10JAN2015
David Wang	
CHK	10JAN2015
Chris Wang	
APVD	10JAN2015
Xiang Xu	
PRODUCT SPEC	108-137054
APPLICATION SPEC	114-137054
WEIGHT	-
Customer Drawing	

TE

TE Connectivity

NAME					HQ-005-F				
SIZE	CAGE CODE		DRAWING NO			RESTRICTED TO			
A3	00779		C-T2080052201000			-			
SCALE		2:1	SHEET		1	OF	2	REV	B3

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20

© COPYRIGHT 20

BY -

ALL RIGHTS RESERVED.






REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

NOTES:


SEE SHEET 1

注释：
见页 1

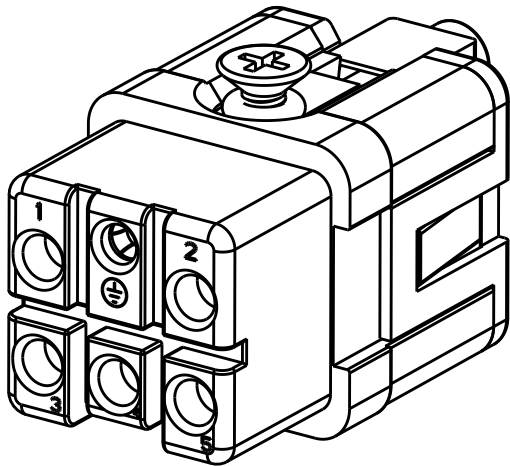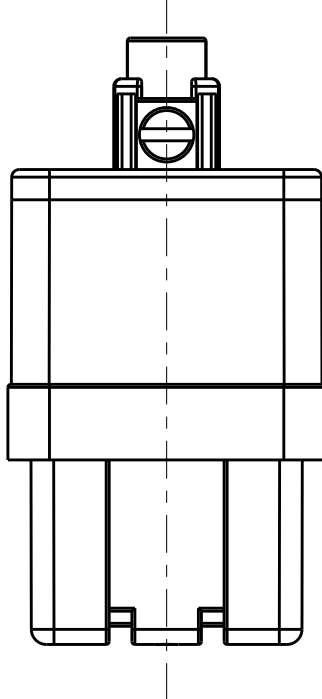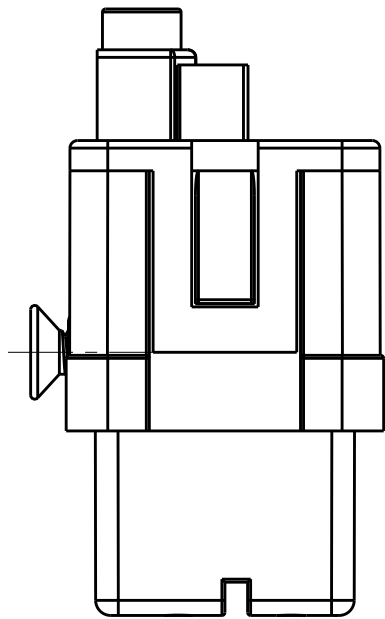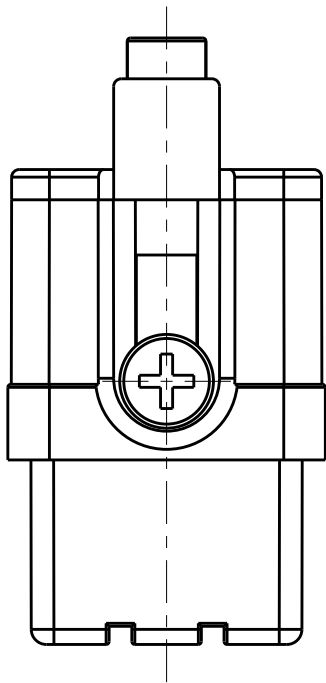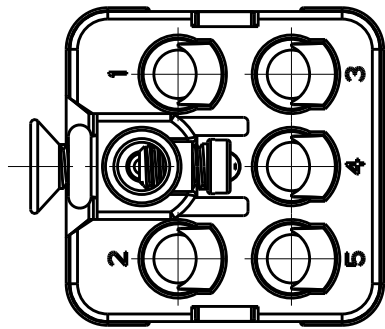

TYPE-3:T2080052201-002 STAINLESS STEEL SCREW,NO LOGO
类 型-3:T2080052201-002 不锈钢螺丝,无LOGO

ALL DIMENSIONS ARE SAME AS TYPE 1,
EXCEPT THOSE DEFINED IN THIS TYPE.
除了在本类型中定义的尺寸外,其它尺寸同类型1

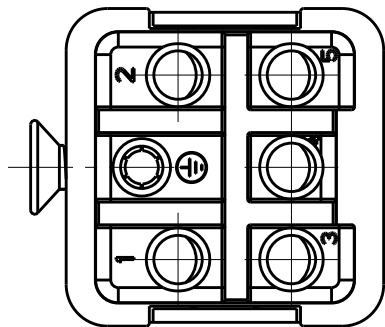

T2080052201-002	HQ-005-F	HQ-005 FEMALE INSERT, STAINLESS STEEL SCREW,NO LOGO HQ-005 母插,不锈钢螺丝,无LOGO	TYPE-3 类 型-3
T2080052201-001	HQ-005-F	HQ-005 FEMALE INSERT, STAINLESS STEEL SCREW HQ-005 母插,不锈钢螺丝	TYPE-2 类 型-2
T2080052201-000	HQ-005-F	HQ-005 FEMALE INSERT HQ-005 母插	TYPE-1 类 型-1
PART NUMBER 料 号	PART DESCRIPTION 描 述		TYPE 类 型

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 10JAN2015 David Wang		
		CHK 10JAN2015 Chris Wang		
		APVD 10JAN2015 Xiang Xu	NAME HQ-005-F	
DIMENSIONS: mm		PRODUCT SPEC 108-137054	SIZE A3	
		APPLICATION SPEC 114-137054		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		WEIGHT -	CAGE CODE 00779	DRAWING NO T2080052201000
MATERIAL -		FINISH -	RESTRICTED TO -	
		Customer Drawing		SCALE 2:1
				SHEET 2 OF 2
				REV B3

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Pluggable Terminal Blocks](#) ***category:***

Click to view products by [Phoenix Contact](#) ***manufacturer:***

Other Similar products are found below :

[57.404.7553](#) [57.504.0053.7](#) [57.510.0053](#) [57.910.6153](#) [01.112.1453](#) [CTB932VE/6](#) [MC 1.5/ 6-ST-3.5 GY AU](#) [ET02015000J0G](#) [734-104](#) [734-302](#) [734-304](#) [8-141-P](#) [FKCT 2.5/ 3-ST KMGY](#) [860505](#) [860508](#) [860516](#) [860810](#) [861908](#) [GBPACX-12](#) [93.731.4953.0](#) [PV05-5,08-K](#) [PVP02-5,00](#) [PVP04-3,50](#) [PVS02-5,00](#) [1-1986160-3](#) [H-10](#) [1546228-5](#) [ELFH09150](#) [ELFH16150](#) [ELFP03110](#) [ELFT06250](#) [ELFT07250](#) [ELVF09400](#) [ELVP03100](#) [ELXH03100](#) [ELXP041G0](#) [ELXT046G0](#) [1700101](#) [1700410](#) [1700425](#) [1703176](#) [1703243](#) [1705229](#) [1710175](#) [1714537](#) [1717806](#) [1719600](#) [1728941](#) [1729386](#) [1734692](#)