


Product Summary

- V_{DS} -30 V
- I_{DS} -7 A
- $R_{DS(ON)}$ (at $V_{GS} = -10V$) <47m Ω

Application


- Reverse Battery protection
- Load switch
- Power management
- PWM Application

Package and Pin Configuration




SOP8

Circuit diagram

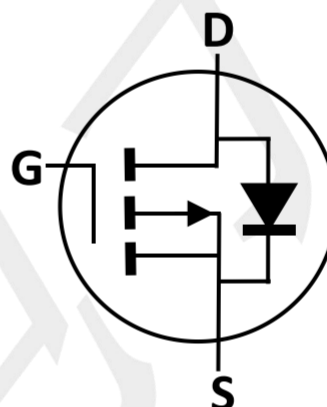

Equivalent Circuit

Marking

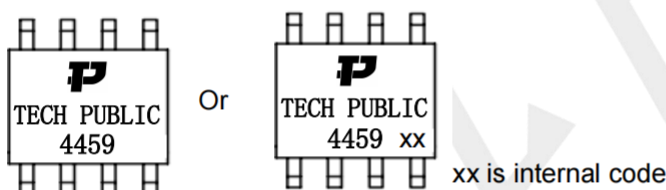

Absolute Maximum Ratings (T_A=25°C unless otherwise noted)

PARAMETER	SYMBOL	LIMIT	UNIT
Drain-Source Voltage	V_{DS}	-30	V
Gate-Source Voltage	V_{GS}	±20	V
Continuous Drain Current	I_D	-7	A
Pulsed Drain Current (note1)	I_{DM}	-30	A
Maximum Power Dissipation	P_D	5	W
Operating Junction Temperature Range	T_J	-55 to +150	°C
Storage Temperature Range	T_{stg}	-55 to +150	°C

Thermal Characteristic

PARAMETER	Symbol	Value	Unit
Thermal Resistance from Junction to Ambient (t≤10s)	$R_{\theta JA}$	50	°C/W
PCB Mount (note2)			

notes 1. Repetitive Rating: Pulse width limited by maximum junction temperature.

2. When mounted on 1" square PCB (FR4 material).


Electrical Characteristics ($T_A=25^\circ\text{C}$ unless otherwise noted)

PARAMETER	CONDITIONS	SYMBOL	MIN	TYP	MAX	UNIT
Static						
Drain-Source Breakdown Voltage	$V_{GS}=0V, I_D=-250\mu A$	BV_{DSS}	-30	--	--	V
Gate-Source Threshold Voltage	$V_{DS}=V_{GS}, I_D=-250\mu A$	$V_{GS(th)}$	-1.0	-1.5	-2.5	V
Gate-Source Leakage	$V_{DS}=0V, V_{GS}=\pm 20V$	I_{GSS}	--	--	± 100	nA
Zero Gate Voltage Drain Current	$V_{DS}=-30V, V_{GS}=0V$	I_{DSS}	--	-0.1	-1	μA
	$V_{DS}=-30V, T_J=125^{\circ}C$		--	-10	-50	μA
Drain-Source On-State Resistance (Note 1)	$V_{GS}=-10V, I_D=-7A$	$R_{DS(on)}$	--	32	47	m Ω
	$V_{GS}=-4.5V, I_D=-4A$		--	51	70	
Forward Transconductance (Note 2)	$V_{DS}=-10V, I_D=-7A$	g_{fs}	--	23	--	S
Dynamic (Note 2)						
Total Gate Charge (Note 3)	$V_{DS}=-15V,$ $I_D=-8A,$ $V_{GS}=-10V$	Q_g	--	15	--	nC
Gate-Source Charge (Note 3)		Q_{gs}	--	4	--	
Gate-Drain Charge (Note 3)		Q_{gd}	--	7.5	--	
Input Capacitance	$V_{DS}=-15V,$ $V_{GS}=0V,$ $F=1.0MHz$	C_{iss}	--	890	--	pF
Output Capacitance		C_{oss}	--	111	--	
Reverse Transfer Capacitance		C_{rss}	--	90	--	
Switching						
Turn-On Delay Time (Note 3)	$V_{DD}=-15V,$ $I_D=-8A,$ $V_{GS}=-10V,$ $R_{GEN}=1\Omega$	$t_{d(on)}$	--	10	--	nS
Rise Time (Note 3)		t_r	--	8	--	
Turn-Off Delay Time (Note 3)		$t_{d(off)}$	--	45	--	
Fall Time (Note 3)		t_f	--	12	--	
Source-Drain Diode Ratings and Characteristics (Note 2)						
Forward Voltage	$V_{GS}=0V, I_{SD}=-8A$	V_{SD}	--	-0.96	-1.5	V
Continuous Source Current	Integral reverse diode in the MOSFET	I_S	--	--	-7	A
Pulsed Current (Note 1)		I_{SM}	--	--	-30	A

Notes:

1. Pulse test; pulse width $\leq 300 \mu s$, duty cycle $\leq 2\%$.
2. Guaranteed by design, not subject to production testing.
3. Independent of operating temperature

Package Information SOP8

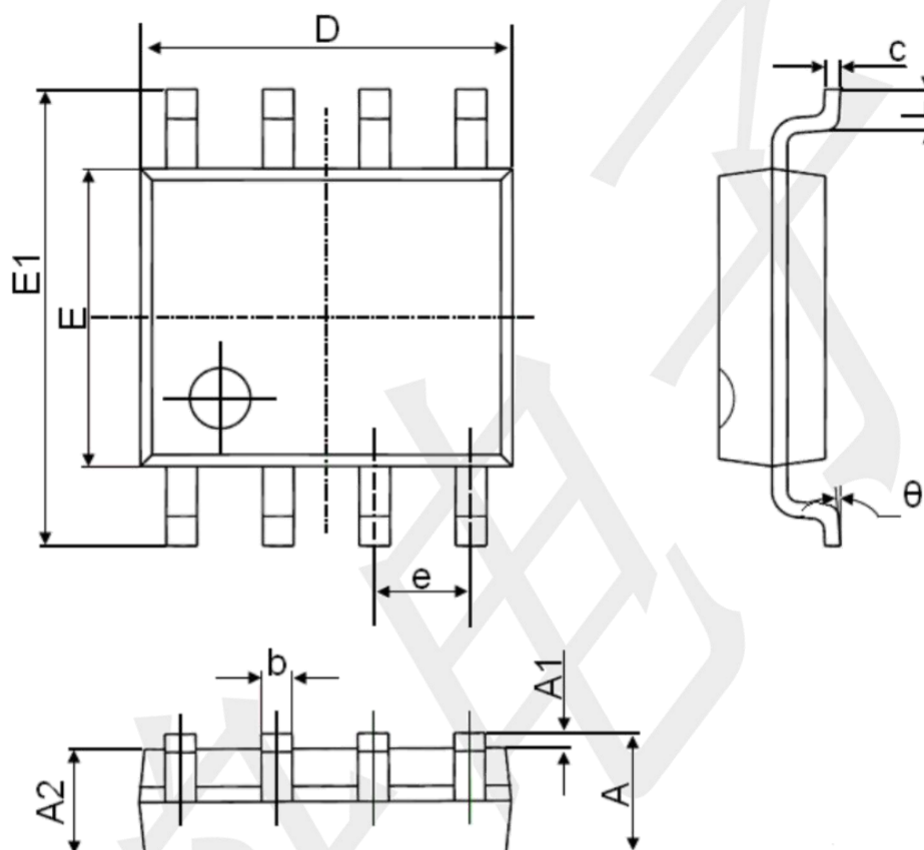

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	1.350	1.750	0.053	0.069
A1	0.100	0.250	0.004	0.010
A2	1.350	1.550	0.053	0.061
b	0.330	0.510	0.013	0.020
c	0.170	0.250	0.006	0.010
D	4.700	5.100	0.185	0.200
E	3.800	4.000	0.150	0.157
E1	5.800	6.200	0.228	0.244
e	1.270(BSC)		0.050(BSC)	
L	0.400	1.270	0.016	0.050
θ	0°	8°	0°	8°

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [MOSFETs](#) category:

Click to view products by [TECH PUBLIC](#) manufacturer:

Other Similar products are found below :

[MCH3443-TL-E](#) [MCH6422-TL-E](#) [NTNS3A92PZT5G](#) [IRFD120](#) [2SK2464-TL-E](#) [2SK3818-DL-E](#) [2SJ277-DL-E](#) [2SK2267\(Q\)](#) [MIC4420CM-TR](#) [IRFS350](#) [IPS70R2K0CEAKMA1](#) [AON6932A](#) [2SK2614\(TE16L1,Q\)](#) [DMN1017UCP3-7](#) [EFC2J004NUZTDG](#) [SCM040600](#) [NTE2384](#) [2N7000TA](#) [DMN2080UCB4-7](#) [DMN61D9UWQ-13](#) [US6M2GTR](#) [DMN31D5UDJ-7](#) [DMP22D4UFO-7B](#) [DMN1006UCA6-7](#) [DMN16M9UCA6-7](#) [STF5N65M6](#) [IRF40H233XTMA1](#) [STU5N65M6](#) [DMN13M9UCA6-7](#) [STU7N60DM2](#) [DMTH10H4M6SPS-13](#) [DMN2990UFB-7B](#) [2N7002W-G](#) [MCQ7328-TP](#) [IPB45P03P4L11ATMA2](#) [BXP4N65F](#) [BXP2N20L](#) [BXP2N65D](#) [TSM60NB380CP](#) [ROG](#) [SLF10N65ABV2](#) [IRF9395MTRPBF](#) [FCMT080N65S3](#) [NTD5C632NLT4G](#) [NTMFS0D55N03CGT1G](#) [NTMFS1D15N03CGT1G](#) [NTMTS0D4N04CTXG](#) [NTMYS2D1N04CLTWG](#) [NVD360N65S3T4G](#) [NVD5C464NLT4G](#) [NVMTS001N06CLTXG](#)