

## Features

- \* 350W peak pulse power (8/20 $\mu$ s)
- \* Low operating :5V
- \* Ultra low capacitance: 5 pF MAX
- \* Ultra low leakage: nA leel
- \* Low clamping voltage
- \* Protects one power line or data line
- \* Complies with following standards:
  - IEC 61000-4-2 (ESD) immunity test  
Air discharge:  $\pm 30$ kV  
Contact discharge:  $\pm 30$ kV
  - IEC61000-4-4 (EFT) 40A (5/50ns)
- \* RoHS Compliant

## Mechanical Characteristics

- \* Package: SOD\_323
- \* Lead Finish: Matte Tin
- \* Case Material: “Green” Molding Compound.
- \* UL Flammability Classification Rating 94V-0
- \* Moisture Sensitivity: Level 3 per J-STD-020
- \* Terminal Connections: See Diagram Below


## Applications

- \* USB Ports
- \* Smart Phones
- \* Wireless Systems
- \* Ethernet 10/100/1000 Base T

## Ordering Information

| Part Number | Qty per Reel | Reel Size |
|-------------|--------------|-----------|
| BV05C-P     | 3000         | 7"        |

## Dimensions and Pin Configuration




**Absolute Maximum Ratings** (Tamb=25°C unless otherwise specified)

| Parameter                       | Symbol | Value       | Unit |
|---------------------------------|--------|-------------|------|
| ESD per IEC 61000-4-2 (Air)     | VESD   | ±30         | kV   |
| ESD per IEC 61000-4-2 (Contact) |        | ±30         |      |
| Operating Temperature Range     | TJ     | -55 to +125 | °C   |
| Storage Temperature Range       | Tstg   | -55 to +150 | °C   |

**Electrical Characteristics** (TA=25°C unless otherwise specified)


| Symbol           | Parameter                                  |
|------------------|--------------------------------------------|
| V <sub>RWM</sub> | Nominal Reverse Working Voltage            |
| I <sub>R</sub>   | Reverse Leakage Current @ V <sub>RWM</sub> |
| V <sub>BR</sub>  | Reverse Breakdown Voltage @ I <sub>T</sub> |
| I <sub>T</sub>   | Test Current for Reverse Breakdown         |
| V <sub>C</sub>   | Clamping Voltage @ I <sub>PP</sub>         |
| I <sub>PP</sub>  | Maximum Peak Pulse Current                 |
| C <sub>ESD</sub> | Parasitic Capacitance                      |
| V <sub>R</sub>   | Reverse Voltage                            |
| f                | Small Signal Frequency                     |

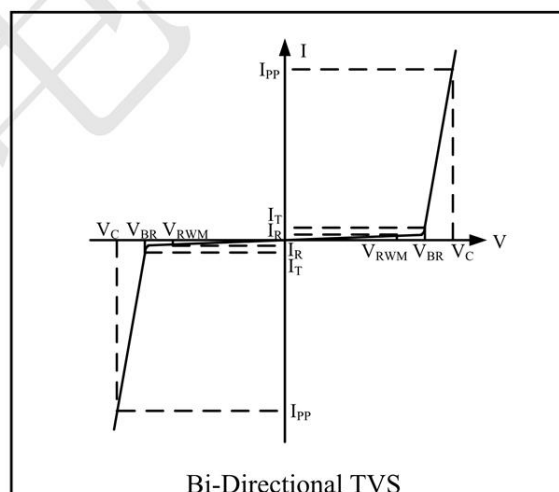


| Parameter               | Symbol           | Test Condition                         | Min | Typ | Max | Unit |
|-------------------------|------------------|----------------------------------------|-----|-----|-----|------|
| Reverse Working Voltage | V <sub>RWM</sub> |                                        |     |     | 5   | V    |
| Breakdown Voltage       | V <sub>BR</sub>  | I <sub>T</sub> = 1mA                   | 6   |     |     | V    |
| Reverse Leakage Current | I <sub>R</sub>   | V <sub>RWM</sub> = 5.0V                |     |     | 0.2 | μA   |
| Clamping Voltage        | V <sub>C</sub>   | I <sub>PP</sub> = 1A (8 x 20μs pulse)  |     |     | 5   | V    |
| Clamping Voltage        | V <sub>C</sub>   | I <sub>PP</sub> = 18A (8 x 20μs pulse) |     |     | 12  | V    |
| Junction Capacitance    | C <sub>J</sub>   | V <sub>R</sub> = 0V, f = 1MHz          |     |     | 5   | pF   |

**Electrical Characteristics ( $T_A=25^\circ\text{C}$  unless otherwise specified)**


**Fig1. 8/20 $\mu\text{s}$  Pulse Waveform**

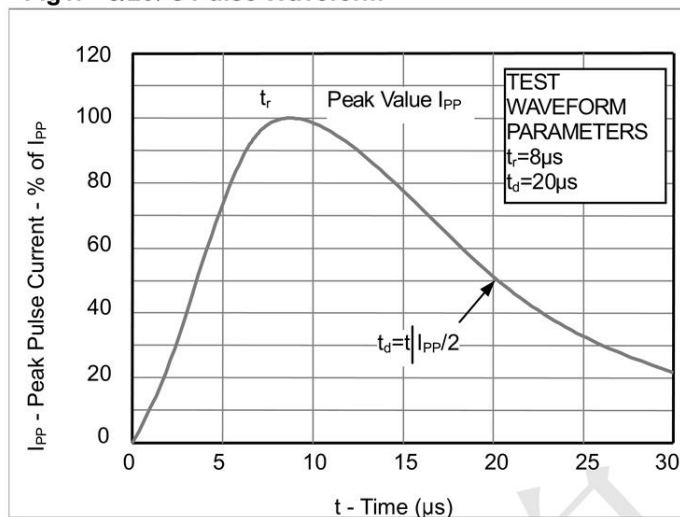


**Fig2. ESD Pulse Waveform (according to IEC 61000-4-2)**

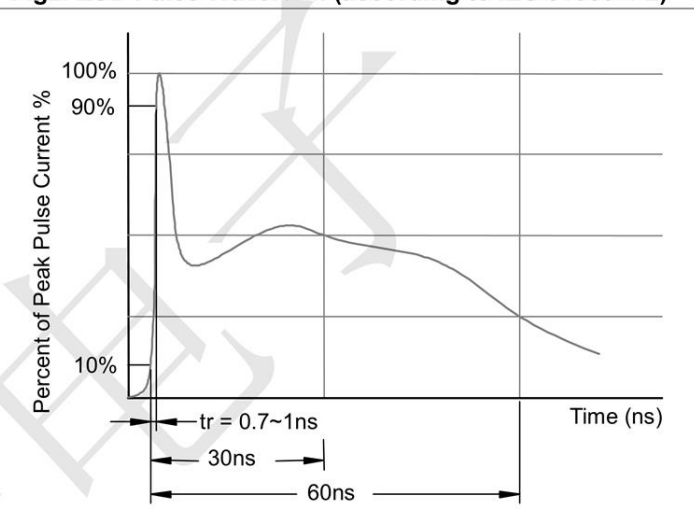

**Fig3. Power Derating Curve**

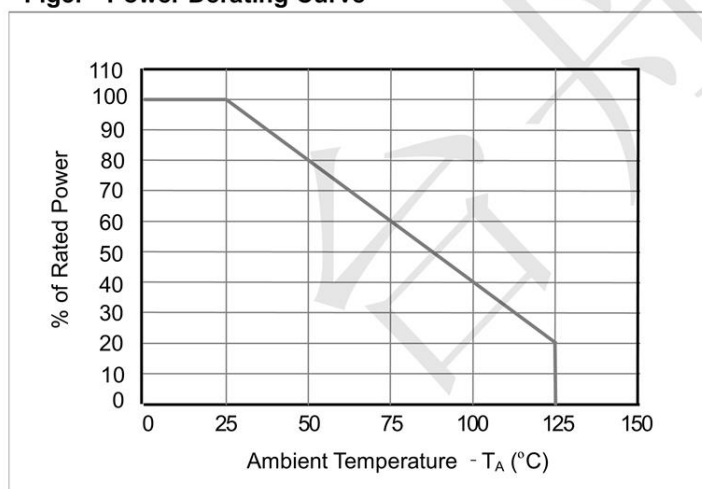


## Outline Drawing - SOD-323

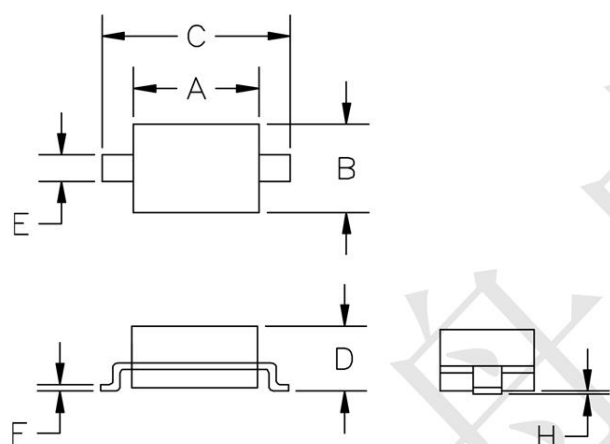

| SYM | DIMENSIONS  |      |        |       |
|-----|-------------|------|--------|-------|
|     | MILLIMETERS |      | INCHES |       |
|     | MIN         | MAX  | MIN    | MAX   |
| A   | 1.50        | 1.80 | 0.060  | 0.071 |
| B   | 1.20        | 1.40 | 0.045  | 0.054 |
| C   | 2.30        | 2.70 | 0.090  | 0.107 |
| D   | -           | 1.10 | -      | 0.043 |
| E   | 0.30        | 0.40 | 0.012  | 0.016 |
| F   | 0.10        | 0.25 | 0.004  | 0.010 |
| H   | -           | 0.10 | -      | 0.004 |

## Land Pattern - SOD-323

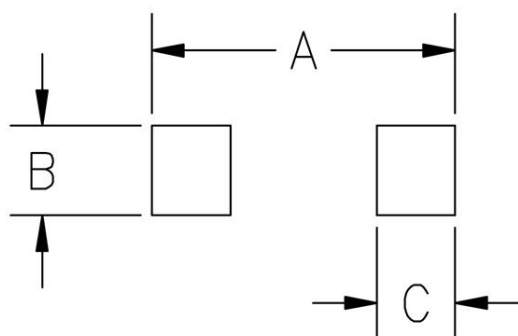

| SYM | DIMENSIONS  |        |
|-----|-------------|--------|
|     | MILLIMETERS | INCHES |
| A   | 3.15        | 0.120  |
| B   | 0.80        | 0.031  |
| C   | 0.80        | 0.031  |

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

**Click to view similar products for** [ESD Suppressors / TVS Diodes](#) **category:**

**Click to view products by** [TECH PUBLIC](#) **manufacturer:**

Other Similar products are found below :

[60KS200C](#) [D18V0L1B2LP-7B](#) [D5V0F4U5P5-7](#) [DESD5V0U1BB-7](#) [NTE4902](#) [P4KE27CA](#) [P6KE11CA](#) [P6KE39CA-TP](#) [P6KE8.2A](#)  
[SA110CA](#) [SA60CA](#) [SA64CA](#) [SMBJ12CATR](#) [SMBJ33CATR](#) [SMBJ8.0A](#) [ESD101-B1-02ELS E6327](#) [ESD105-B1-02EL E6327](#) [ESD112-B1-02EL E6327](#) [ESD119B1W01005E6327XTSA1](#) [ESD5V0L1B02VH6327XTSA1](#) [ESD7451N2T5G](#) [19180-510](#) [CPDT-5V0USP-HF](#)  
[3.0SMCJ33CA-F](#) [3.0SMCJ36A-F](#) [HSPC16701B02TP](#) [D3V3Q1B2DLP3-7](#) [D55V0M1B2WS-7](#) [DESD5V0U1BL-7B](#) [DRTR5V0U4SL-7](#)  
[SCM1293A-04SO](#) [ESD200-B1-CSP0201 E6327](#) [SM12-7](#) [SMF8.0A-TP](#) [SMLJ45CA-TP](#) [SMQA1000T1G](#) [CEN955 W/DATA](#) [82350120560](#)  
[VESD12A1A-HD1-GS08](#) [CPDUR5V0R-HF](#) [CPDQC5V0U-HF](#) [CPDQC5V0USP-HF](#) [CPDQC5V0-HF](#) [IP4042CX5/LF,135](#) [D1213A-01LP4-7B](#) [D1213A-02WL-7](#) [1SMB33CAT3G-XYZ](#) [MMAD1108/TR13](#) [5KP100A](#) [5KP15A](#)