


Product Summary

- V_{DS} -30 V
- I_{DS} -3.5A
- $R_{DS(ON)}$ (at $V_{GS}=-10V$) <88m Ω
- $R_{DS(ON)}$ (at $V_{GS}=-4.5V$) <138m Ω


Application

- Battery protection
- Load switch
- Power management
- DC/DC converter

Package and Pin Configuration



Circuit diagram

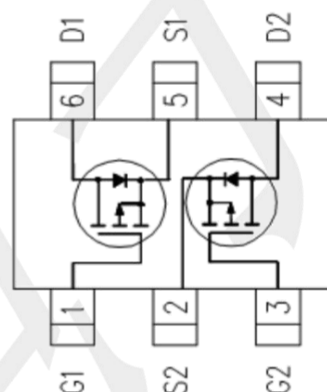

Marking: 2623

Absolute Maximum Ratings ($T_c=25^{\circ}\text{C}$ unless otherwise noted)

PARAMETER	SYMBOL	LIMIT	UNIT
Drain-Source Voltage	V_{DS}	-30	V
Gate-Source Voltage	V_{GS}	± 20	V
Continuous Drain Current	I_D	-3.5	A
Pulsed Drain Current (note 1)	I_{DM}	-12	A
Total Power Dissipation (note 2)	P_{DTOT}	1.8	W
Operating Junction Temperature Range	T_J	-55 to +150	$^{\circ}\text{C}$
Storage Temperature Range	T_{stg}	-55 to +150	$^{\circ}\text{C}$

Notes : 1. Pulse width limited by Max.junction temperature.

2.Per element must not be exceeded

Thermal Characteristic

PARAMETER		Symbol	Value	Unit
Junction-to-Ambient Thermal Resistance	PCB Mount (Note)	R_{thJA}	115	$^{\circ}\text{C}/\text{W}$

Note : When mounted on 1" square PCB (FR4 material).







Electrical Characteristics (T_A=25 °C unless otherwise noted)

PARAMETER	CONDITIONS	SYMBOL	MIN	TYP	MAX	UNIT
Static						
Drain-Source Breakdown Voltage	$V_{GS}=0V, I_D= -250\mu A$	BV_{DSS}	-30	--	--	V
Gate-Source Threshold Voltage	$V_{DS}=V_{GS}, I_D= -250\mu A$	$V_{GS(th)}$	-1	-2	-3	V
Gate-Source Leakage	$V_{DS}=0V, V_{GS}= \pm 20V$	I_{GSS}	--	--	± 100	nA
Zero Gate Voltage Drain Current	$V_{DS}= -30V, V_{GS}=0V$	I_{DSS}	--	--	-1	μA
	$V_{DS}= -30V, T_J=55^{\circ}C$		--	--	-10	μA
Drain-Source On-State Resistance (Note 1)	$V_{GS}= -10V, I_D= -3.5A$	$R_{DS(on)}$	--	77	88	m Ω
	$V_{GS}= -4.5V, I_D= -2.5A$		--	110	138	
Forward Transconductance (Note 2)	$V_{DS}= -10V, I_D= -3.5A$	g_{fs}	--	7	--	S
Dynamic (Note 2)						
Total Gate Charge (Note 3)	$V_{DS}= -15V, I_D= -2.5A,$ $V_{GS}= -4.5V$	Q_g	--	4.1	--	nC
Gate-Source Charge (Note 3)		Q_{gs}	--	1.3	--	
Gate-Drain Charge (Note 3)		Q_{gd}	--	1.8	--	
Input Capacitance	$V_{DS}= -15V, V_{GS}= 0V,$ $F= 1.0MHz$	C_{iss}	--	340	--	pF
Output Capacitance		C_{oss}	--	67	--	
Reverse Transfer Capacitance		C_{rss}	--	51	--	
Switching						
Turn-On Delay Time (Note 3)	$V_{DD}= -15V, I_D= -1A,$ $V_{GEN}= -4.5V,$ $R_L= 15\Omega, R_G= 1\Omega$	$t_{d(on)}$	--	40	--	nS
Rise Time (Note 3)		t_r	--	40	--	
Turn-Off Delay Time (Note 3)		$t_{d(off)}$	--	20	--	
Fall Time (Note 3)		t_f	--	17	--	
Source-Drain Diode Ratings and Characteristics (Note 2)						
Forward Voltage	$V_{GS}= 0V, I_F= -0.75A$	V_{SD}	--	-0.8	-1.2	V
Continuous Source Current	Integral reverse diode in the MOSFET	I_S	--	--	-1.5	A
Pulsed Current (Note 1)		I_{SM}	--	--	-12	A

Notes:


1. Pulse test; pulse width ≤ 300 μs, duty cycle ≤ 2%.
2. Guaranteed by design, not subject to production testing.
3. Independent of operating temperature

TYPICAL CHARACTERISTICS (25 °C, unless otherwise noted)

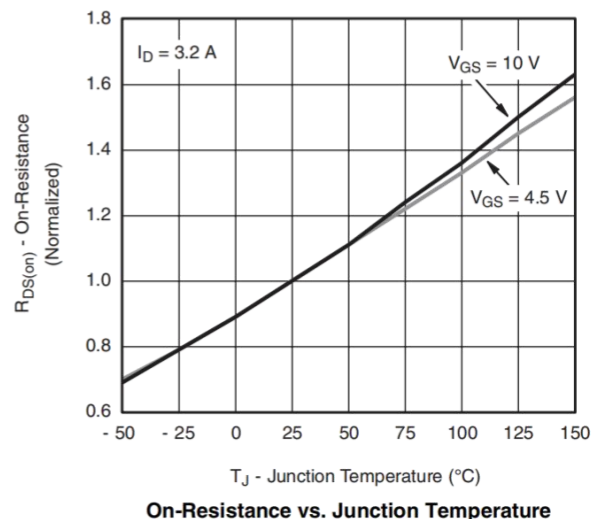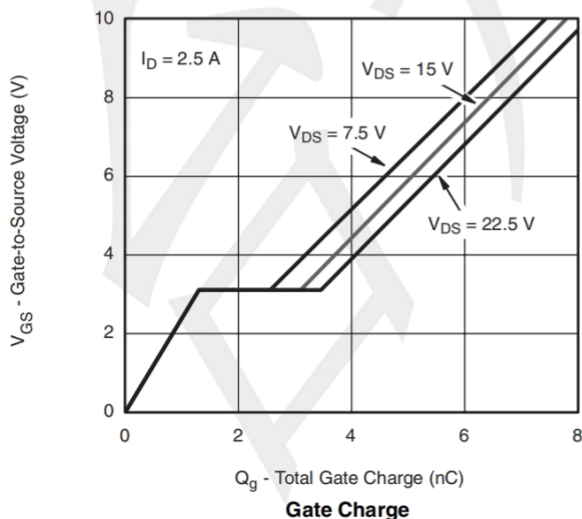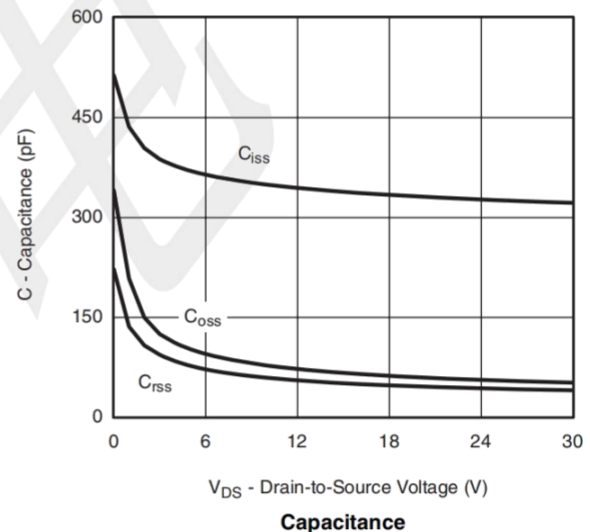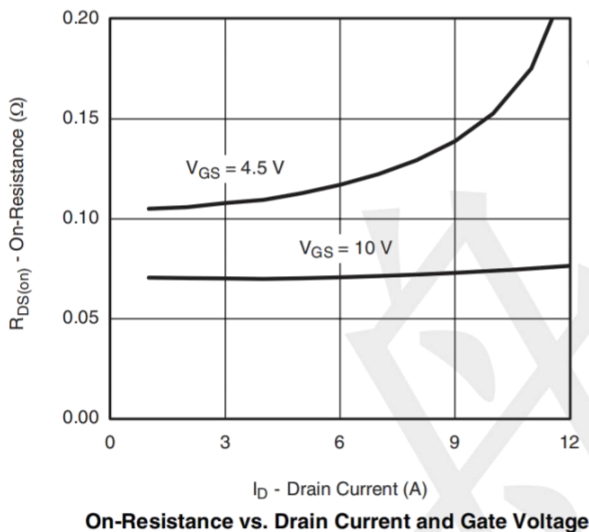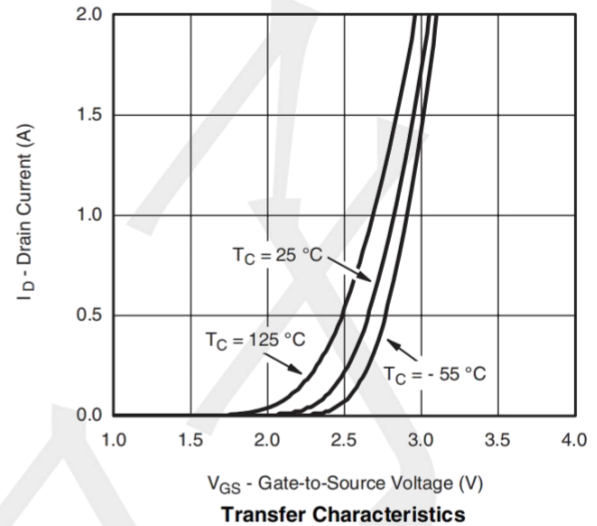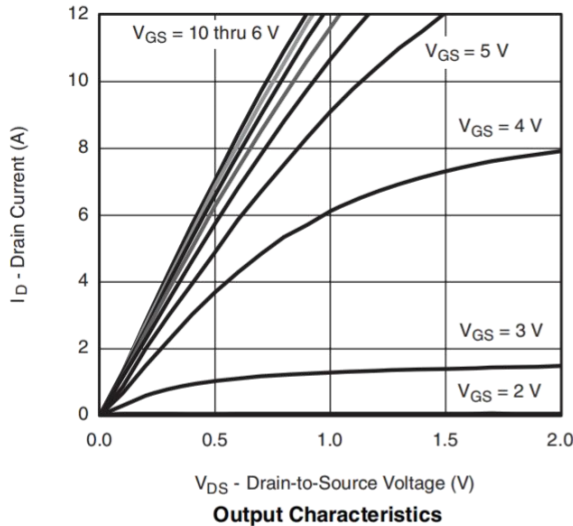


Package Outline & Dimensions

SOT23-6L

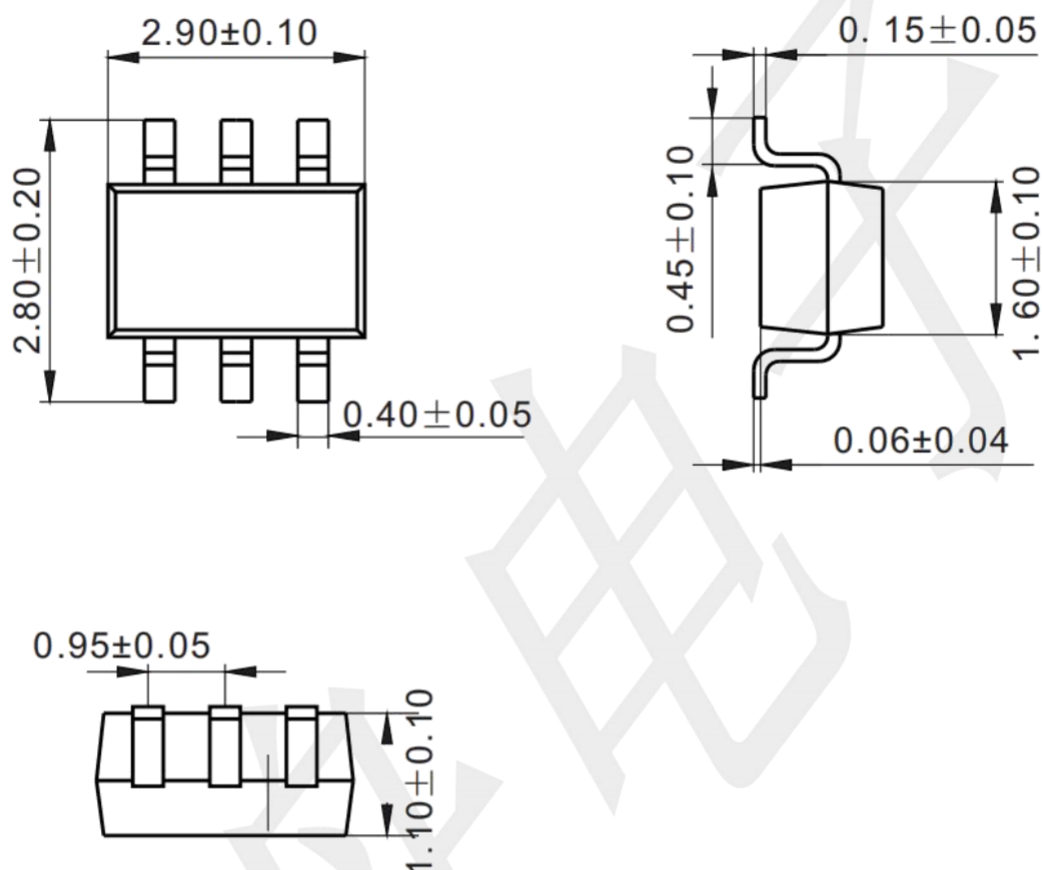

Mounting Pad Layout (unit: mm)

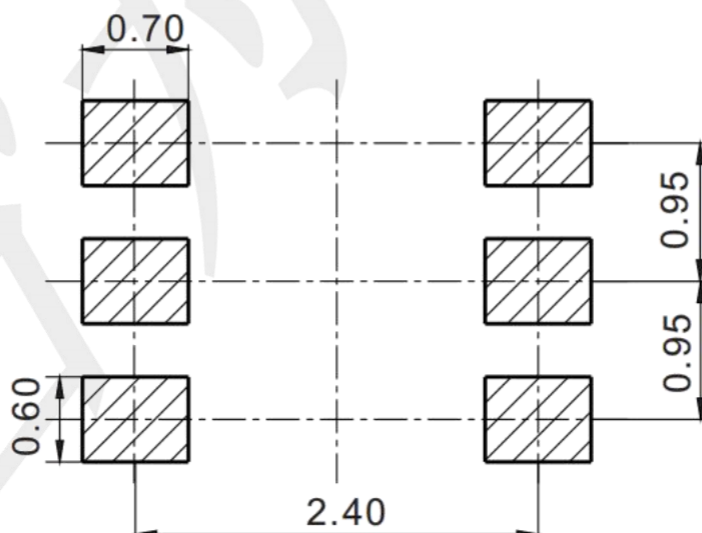

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [MOSFETs](#) category:

Click to view products by [TECH PUBLIC](#) manufacturer:

Other Similar products are found below :

[MCH3443-TL-E](#) [MCH6422-TL-E](#) [NTNS3A92PZT5G](#) [IRFD120](#) [2SK2464-TL-E](#) [2SK3818-DL-E](#) [2SJ277-DL-E](#) [2SK2267\(Q\)](#) [MIC4420CM-TR](#) [IRFS350](#) [IPS70R2K0CEAKMA1](#) [AON6932A](#) [2SK2614\(TE16L1,Q\)](#) [DMN1017UCP3-7](#) [EFC2J004NUZTDG](#) [SCM040600](#) [NTE2384](#) [2N7000TA](#) [DMN2080UCB4-7](#) [DMN61D9UWQ-13](#) [US6M2GTR](#) [DMN31D5UDJ-7](#) [DMP22D4UFO-7B](#) [DMN1006UCA6-7](#) [DMN16M9UCA6-7](#) [STF5N65M6](#) [IRF40H233XTMA1](#) [STU5N65M6](#) [DMN13M9UCA6-7](#) [STU7N60DM2](#) [DMTH10H4M6SPS-13](#) [DMN2990UFB-7B](#) [2N7002W-G](#) [MCQ7328-TP](#) [IPB45P03P4L11ATMA2](#) [BXP4N65F](#) [BXP2N20L](#) [BXP2N65D](#) [TSM60NB380CP](#) [ROG](#) [SLF10N65ABV2](#) [IRF9395MTRPBF](#) [FCMT080N65S3](#) [NTD5C632NLT4G](#) [NTMFS0D55N03CGT1G](#) [NTMFS1D15N03CGT1G](#) [NTMTS0D4N04CTXG](#) [NTMYS2D1N04CLTWG](#) [NVD360N65S3T4G](#) [NVD5C464NLT4G](#) [NVMTS001N06CLTXG](#)