


Product Summary

- V_{DS} 100 V
- I_{DS} 50A
- $R_{DS(ON)}$ (at $V_{GS}=10V$) $<18m\Omega$
- Advanced Trench Technology


Application

- Reverse Battery protection
- Load switch
- Power management
- PWM Application


Package and Pin Configuration

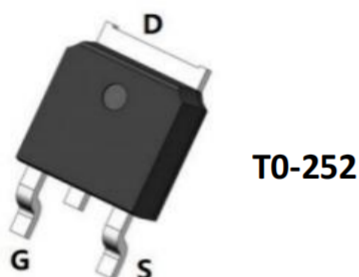

Circuit diagram



Marking:



Absolute Maximum Ratings ($T_A=25^\circ\text{C}$ unless otherwise noted)

PARAMETER		SYMBOL	LIMIT	UNIT
Drain-Source Voltage		V_{DS}	100	V
Gate-Source Voltage		V_{GS}	± 20	V
Continuous Drain Current	$T_C=25^\circ\text{C}$	I_D	50	A
	$T_C=100^\circ\text{C}$		30	
Pulsed Drain Current		I_{DM}	200	A
Total Power Dissipation	$T_C=25^\circ\text{C}$	$P_{D(TOT)}$	100	W
Operating Junction Temperature Range		T_J	-55 to +175	$^\circ\text{C}$
Storage Temperature Range		T_{stg}	-55 to +175	$^\circ\text{C}$

Thermal Characteristic

PARAMETER		Symbol	Value	Unit
Thermal Resistance, Junction to Case	PCB Mount (Note)	$R_{\theta JC}$	2	$^\circ\text{C/W}$

Note : When mounted on 1" square PCB (FR4 material).







Electrical Characteristics (T_A=25°C unless otherwise noted)

PARAMETER	CONDITIONS	SYMBOL	MIN	TYP	MAX	UNIT
Static						
Drain-Source Breakdown Voltage	$V_{GS}=0V, I_D=250\mu A$	BV_{DSS}	100	--	--	V
Gate-Source Threshold Voltage	$V_{DS}=V_{GS}, I_D=250\mu A$	$V_{GS(th)}$	--	1.5	--	V
Gate-Source Leakage	$V_{DS}=0V, V_{GS}= \pm 20V$	I_{GSS}	--	--	± 100	nA
Zero Gate Voltage Drain Current	$V_{DS}= 80V, V_{GS}=0V$	I_{DSS}	--	--	1	μA
	$V_{DS}= 80V, T_J=125^{\circ}C$		--	--	50	μA
Drain-Source On-State Resistance (Note 1)	$V_{GS}= 10V, I_D= 20A$	$R_{DS(on)}$	--	18	--	m Ω
	$V_{GS}= 4.5V, I_D= 20A$		--	22	--	
Dynamic (Note 2)						
Total Gate Charge (Note 3)	$V_{DS}= 50V, I_D= 10A,$ $V_{GS}= 10V$	Q_g	--	33.3	--	nC
Gate-Source Charge (Note 3)		Q_{gs}	--	6.9	--	
Gate-Drain Charge (Note 3)		Q_{gd}	--	5.1	--	
Input Capacitance	$V_{DS}= 50V, V_{GS}= 0V,$ $F= 1.0MHz$	C_{iss}	--	1870	--	pF
Output Capacitance		C_{oss}	--	260	--	
Reverse Transfer Capacitance		C_{rss}	--	6.9	--	
Switching						
Turn-On Delay Time (Note 3)	$V_{DD}= 50V, I_D= 10A,$ $V_{GS}= 10V,$ $R_{GEN}= 6\Omega$	$t_{d(on)}$	--	6.5	--	nS
Rise Time (Note 3)		t_r	--	7	--	
Turn-Off Delay Time (Note 3)		$t_{d(off)}$	--	19.6	--	
Fall Time (Note 3)		t_f	--	8	--	
Source-Drain Diode Ratings and Characteristics (Note 2)						
Forward Voltage	$V_{GS}= 0V, I_S= 20A$	V_{SD}	--	0.8	1.3	V
Continuous Source Current	Integral reverse diode in the MOSFET	I_S	--	--	50	A
Pulsed Current (Note 1)		I_{SM}	--	--	200	A







Notes:

1. Pulse test; pulse width ≤ 300 μS, duty cycle ≤ 2%.
2. Guaranteed by design, not subject to production testing.
3. Independent of operating temperature


TYPICAL CHARACTERISTICS

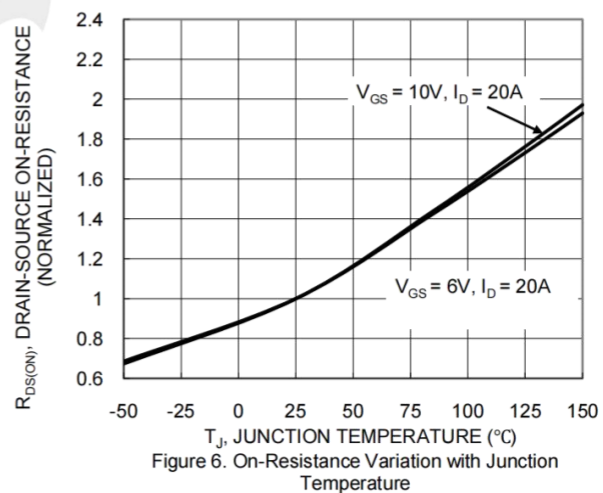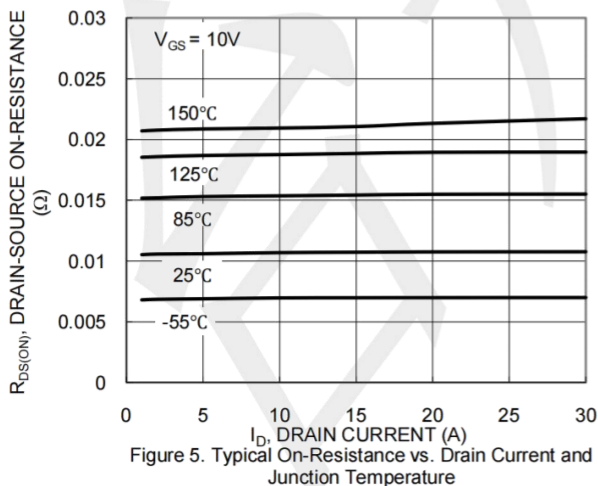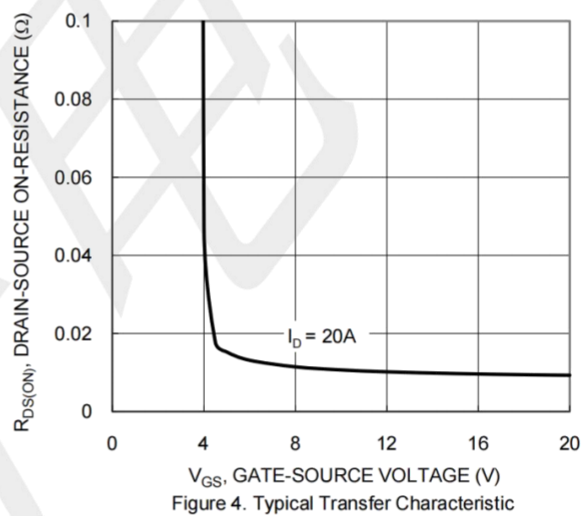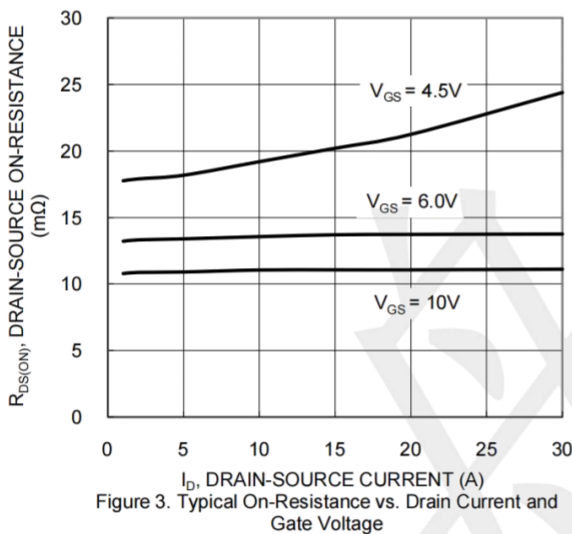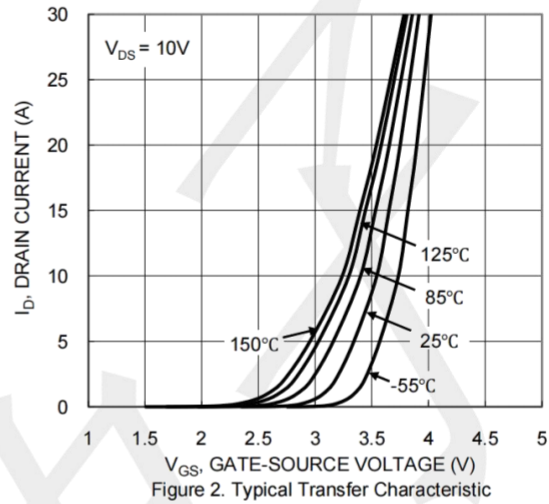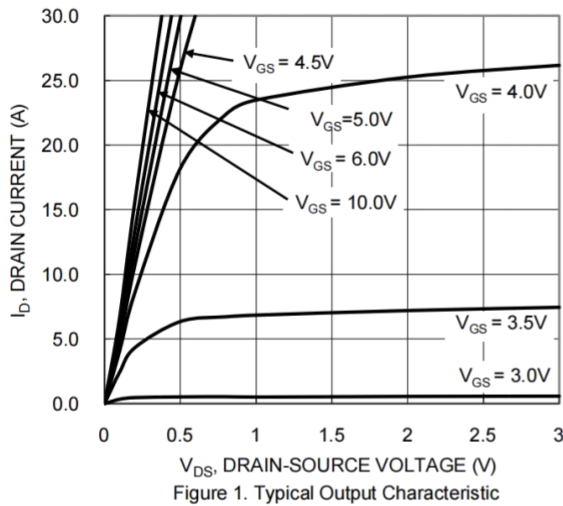

TYPICAL CHARACTERISTICS

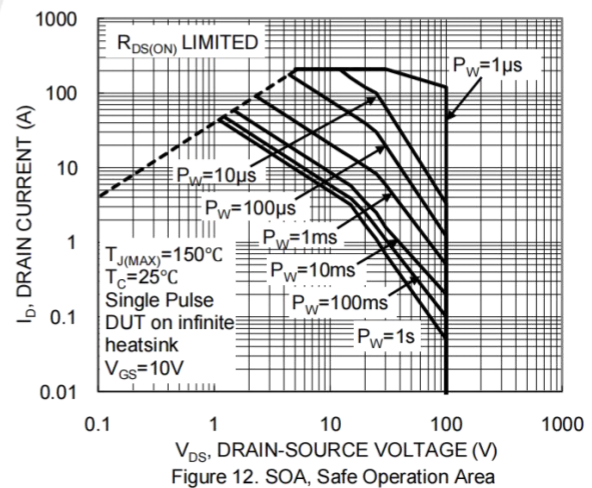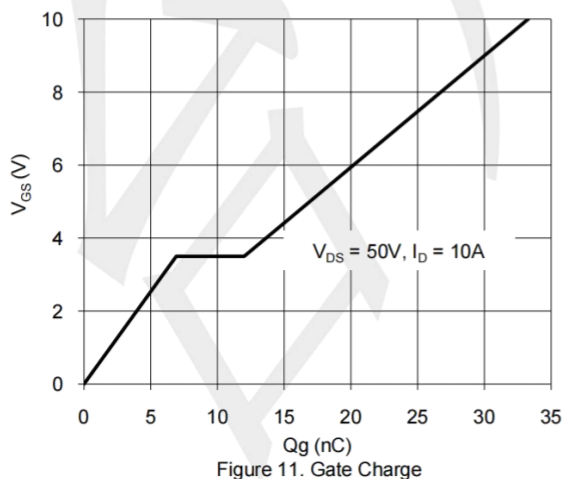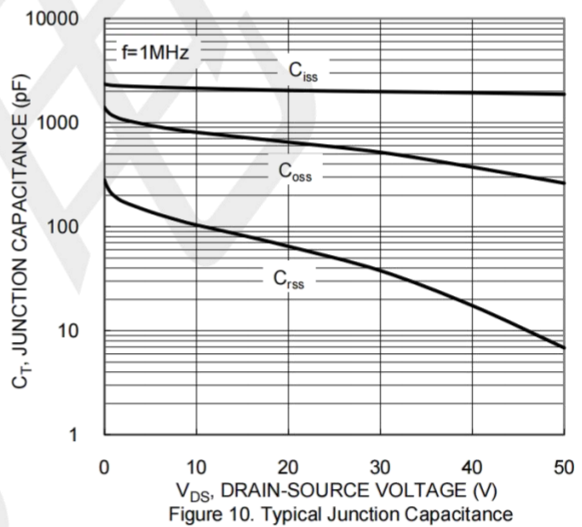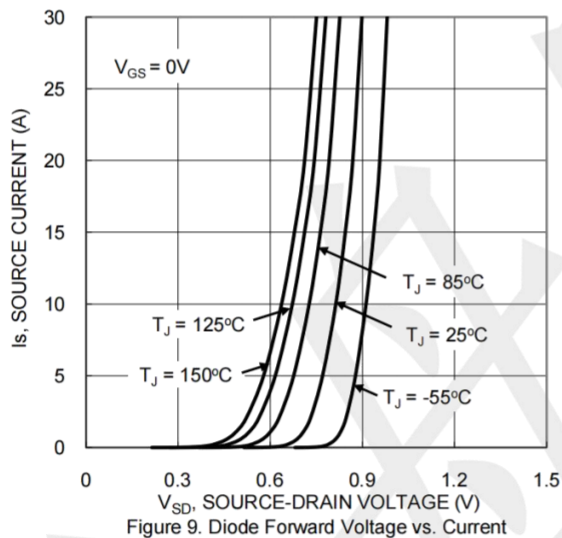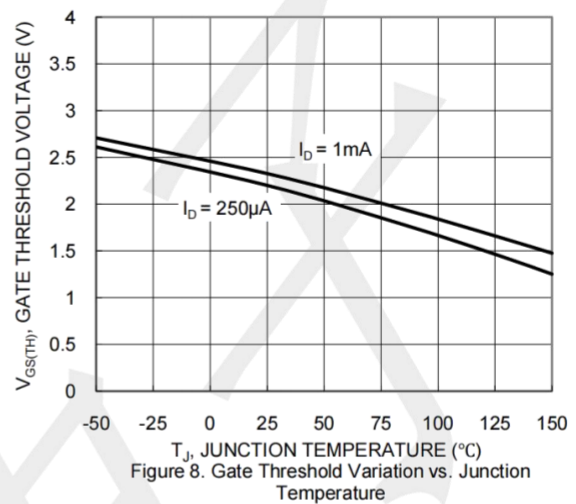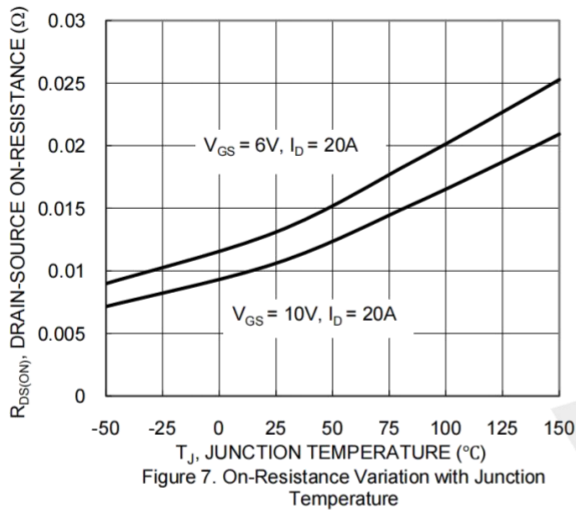

Outline Drawing - TO-252

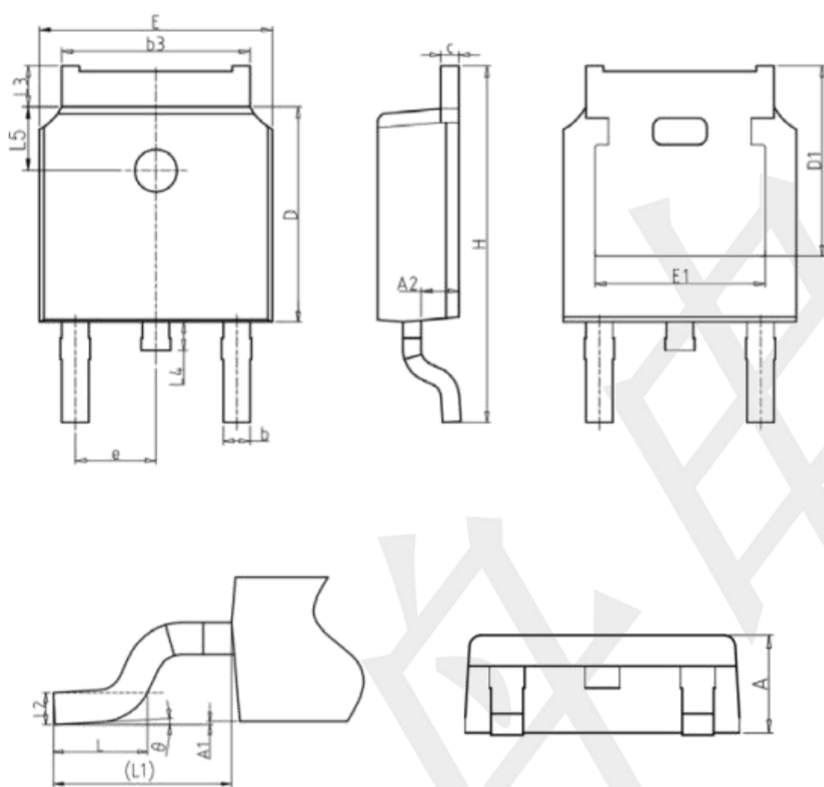

COMMON DIMENSIONS

SYMBOL	mm		
	MIN	NOM	MAX
A	2.20	2.30	2.40
A1	0.00	-	0.20
A2	0.97	1.07	1.17
b	0.68	0.78	0.90
b3	5.20	5.33	5.50
c	0.43	0.53	0.63
D	5.98	6.10	6.22
D1	5.30REF		
E	6.40	6.60	6.80
E1	4.63	-	-
e	2.286BSC		
H	9.40	10.10	10.50
L	1.38	1.50	1.75
L1	2.90REF		
L2	0.51BSC		
L3	0.88	-	1.28
L4	-	-	1.00
L5	1.65	1.80	1.95
θ	0°	-	8°

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [MOSFETs](#) category:

Click to view products by [TECH PUBLIC](#) manufacturer:

Other Similar products are found below :

[MCH3443-TL-E](#) [MCH6422-TL-E](#) [NTNS3A92PZT5G](#) [IRFD120](#) [2SK2464-TL-E](#) [2SK3818-DL-E](#) [2SJ277-DL-E](#) [2SK2267\(Q\)](#) [MIC4420CM-TR](#) [IRFS350](#) [IPS70R2K0CEAKMA1](#) [AON6932A](#) [2SK2614\(TE16L1,Q\)](#) [DMN1017UCP3-7](#) [EFC2J004NUZTDG](#) [SCM040600](#) [NTE2384](#) [2N7000TA](#) [DMN2080UCB4-7](#) [DMN61D9UWQ-13](#) [US6M2GTR](#) [DMN31D5UDJ-7](#) [DMP22D4UFO-7B](#) [DMN1006UCA6-7](#) [DMN16M9UCA6-7](#) [STF5N65M6](#) [IRF40H233XTMA1](#) [STU5N65M6](#) [DMN13M9UCA6-7](#) [STU7N60DM2](#) [DMTH10H4M6SPS-13](#) [DMN2990UFB-7B](#) [2N7002W-G](#) [MCQ7328-TP](#) [IPB45P03P4L11ATMA2](#) [BXP4N65F](#) [BXP2N20L](#) [BXP2N65D](#) [TSM60NB380CP](#) [ROG](#) [SLF10N65ABV2](#) [IRF9395MTRPBF](#) [FCMT080N65S3](#) [NTD5C632NLT4G](#) [NTMFS0D55N03CGT1G](#) [NTMFS1D15N03CGT1G](#) [NTMTS0D4N04CTXG](#) [NTMYS2D1N04CLTWG](#) [NVD360N65S3T4G](#) [NVD5C464NLT4G](#) [NVMTS001N06CLTXG](#)