

Features

- Peak power dissipation
200W@10 x 1000 us Pluse
- Low incremental surge resistance
- Excellent clamping capability
- Fast response time
- Low leakage current
- Halogen free and RoHS compliant

Applications

- Personal digital assistants (PDA)
- Cellular handsets & Accessories
- Handhelds and notebooks
- Portable instrumentation

Mechanical Characteristics

- SOD-123FL surface mount package

Dimensions and Pin Configuration



SOD-123FL



Pin Configuration

Maximum Ratings& Thermal Characteristics

(Tamb=25°C unless otherwise specified)

Parameter	Symbol	Value	Unit
Peak pulse power (tp=10/1000μs waveform)	P _{PPM}	200	W
Steady state power dissipation at T _A =50°C	P _{M(AV)}	1	W
Peak Pulse Current of on 10/1000us Waveform	I _{PPM}	See Table	A
Typical thermal resistance junction to ambient	R _{θJA}	220	°C/W
Storage & operating temperature range	T _{STG} ,T _J	-55~+150	°C

Electrical Characteristics (TA=25°C unless otherwise specified)

Part Number (Uni)	Part Number (Bi)	Reverse Stand off Voltage V_R (V)	Breakdown Voltage V_{BR} @ I_T (V)		Test Current I_T (mA)	Maximum Clamping Voltage V_C @ I_{PP} (V)	Maximum Peak Pulse Current I_{PP} (A)	Maximum Reverse Leakage I_R @ V_R (μA)
			Min	Max				
SMF5.0A	SMF5.0CA	5	6.4	7	10	9.2	21.7	400
SMF6.0A	SMF6.0CA	6	6.67	7.37	10	10.3	19.4	400
SMF6.5A	SMF6.5CA	6.5	7.22	7.98	10	11.2	17.9	250
SMF7.0A	SMF7.0CA	7	7.78	8.6	10	12	16.7	100
SMF7.5A	SMF7.5CA	7.5	8.33	9.21	1	12.9	15.5	50
SMF8.0A	SMF8.0CA	8	8.89	9.83	1	13.6	14.7	25
SMF8.5A	SMF8.5CA	8.5	9.44	10.4	1	14.4	13.9	10
SMF9.0A	SMF9.0CA	9	10	11.1	1	15.4	13	5
SMF10A	SMF10CA	10	11.1	12.3	1	17	11.8	2.5
SMF11A	SMF11CA	11	12.2	13.5	1	18.2	11	2.5
SMF12A	SMF12CA	12	13.3	14.7	1	19.9	10.1	2.5
SMF13A	SMF13CA	13	14.4	15.9	1	21.5	9.3	1
SMF14A	SMF14CA	14	15.6	17.2	1	23.2	8.6	1
SMF15A	SMF15CA	15	16.7	18.5	1	24.4	8.2	1
SMF16A	SMF16CA	16	17.8	19.7	1	26	7.7	1
SMF17A	SMF17CA	17	18.9	20.9	1	27.6	7.2	1
SMF18A	SMF18CA	18	20	22.1	1	29.2	6.8	1
SMF20A	SMF20CA	20	22.2	24.5	1	32.4	6.2	1
SMF22A	SMF22CA	22	24.4	26.9	1	35.5	5.6	1
SMF24A	SMF24CA	24	26.7	29.5	1	38.9	5.1	1
SMF26A	SMF26CA	26	28.9	31.9	1	42.1	4.8	1
SMF28A	SMF28CA	28	31.1	34.4	1	45.4	4.4	1
SMF30A	SMF30CA	30	33.3	36.8	1	48.4	4.1	1
SMF33A	SMF33CA	33	36.7	40.6	1	53.3	3.8	1
SMF36A	SMF36CA	36	40	44.2	1	58.1	3.4	1
SMF40A	SMF40CA	40	44.4	49.1	1	64.5	3.1	1
SMF43A	SMF43CA	43	47.8	52.8	1	69.4	2.9	1
SMF45A	SMF45CA	45	50	55.3	1	72.7	2.8	1
SMF48A	SMF48CA	48	53.3	58.9	1	77.4	2.6	1
SMF51A	SMF51CA	51	56.7	62.7	1	82.4	2.4	1
SMF54A	SMF54CA	54	60	66.3	1	87.1	2.3	1







Electrical Characteristics (TA=25°C unless otherwise specified)

Part Number (Uni)	Part Number (Bi)	Reverse Stand off Voltage V_R (V)	Breakdown Voltage V_{BR} @ I_T (V)		Test Current I_T (mA)	Maximum Clamping Voltage V_C @ I_{PP} (V)	Maximum Peak Pulse Current I_{PP} (A)	Maximum Reverse Leakage I_R @ V_R (μA)
			Min	Max				
SMF58A	SMF58CA	58	64.4	71.2	1	93.6	2.1	1
SMF60A	SMF60CA	60	66.7	73.7	1	96.8	1.8	1
SMF64A	SMF64CA	64	71.1	78.6	1	103	1.7	1
SMF70A	SMF70CA	70	77.8	86	1	113	1.5	1
SMF75A	SMF75CA	75	83.3	92.1	1	121	1.4	1
SMF78A	SMF78CA	78	86.7	95.8	1	126	1.4	1
SMF85A	SMF85CA	85	94.4	104	1	137	1.3	1
SMF90A	SMF90CA	90	100	111	1	146	1.2	1
SMF100A	SMF100CA	100	111	123	1	162	1.1	1
SMF110A	SMF110CA	110	122	135	1	177	1	1
SMF120A	SMF120CA	120	133	147	1	193	0.9	1
SMF130A	SMF130CA	130	144	159	1	209	0.8	1
SMF150A	SMF150CA	150	167	185	1	243	0.7	1
SMF160A	SMF160CA	160	178	197	1	259	0.7	1
SMF170A	SMF170CA	170	189	209	1	275	0.6	1
SMF58A	SMF58CA	58	64.4	71.2	1	93.6	2.1	1
SMF60A	SMF60CA	60	66.7	73.7	1	96.8	1.8	1
SMF64A	SMF64CA	64	71.1	78.6	1	103	1.7	1
SMF70A	SMF70CA	70	77.8	86	1	113	1.5	1
SMF75A	SMF75CA	75	83.3	92.1	1	121	1.4	1
SMF78A	SMF78CA	78	86.7	95.8	1	126	1.4	1
SMF85A	SMF85CA	85	94.4	104	1	137	1.3	1
SMF90A	SMF90CA	90	100	111	1	146	1.2	1
SMF100A	SMF100CA	100	111	123	1	162	1.1	1
SMF110A	SMF110CA	110	122	135	1	177	1	1
SMF120A	SMF120CA	120	133	147	1	193	0.9	1
SMF130A	SMF130CA	130	144	159	1	209	0.8	1
SMF150A	SMF150CA	150	167	185	1	243	0.7	1
SMF160A	SMF160CA	160	178	197	1	259	0.7	1
SMF170A	SMF170CA	170	189	209	1	275	0.6	1

For bi-directional type having V_{RWM} of 10 Volts and less, the I_R limit is double.


For parts without A, the V_{BR} is +10%.

Typical Characteristics Curves

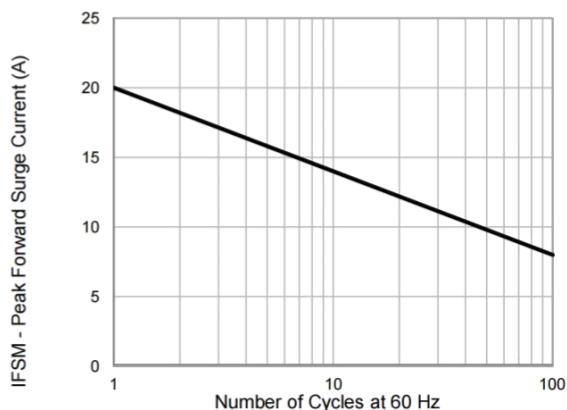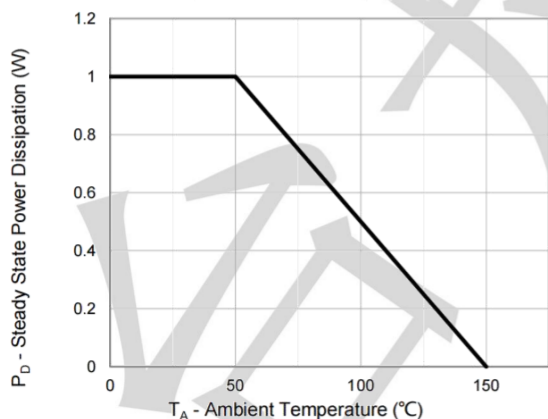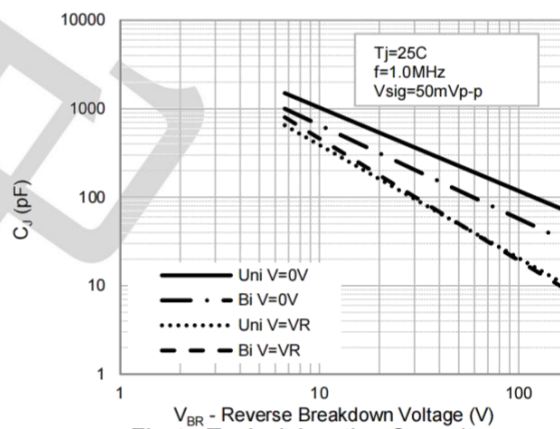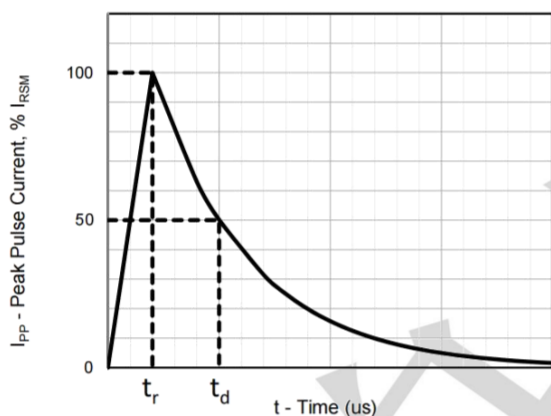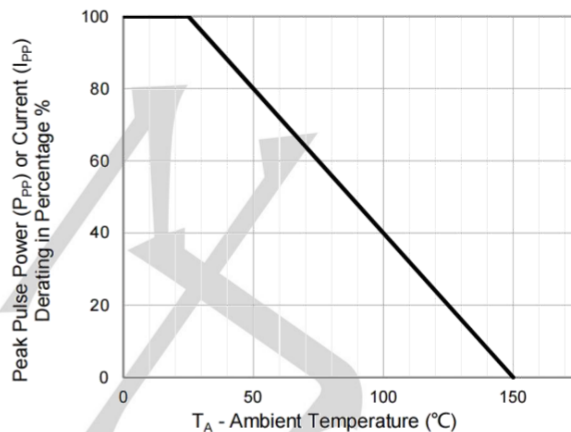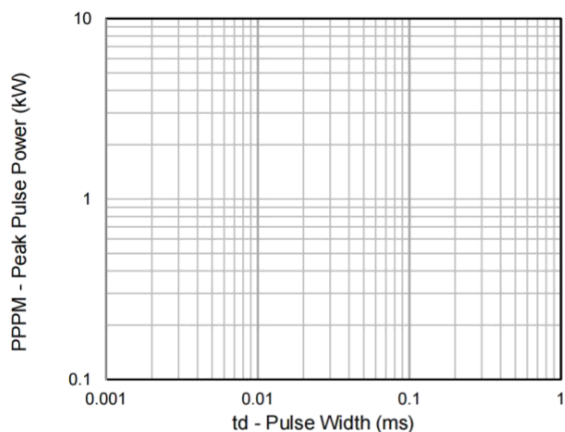

Recommended Soldering Conditions

Reflow Soldering

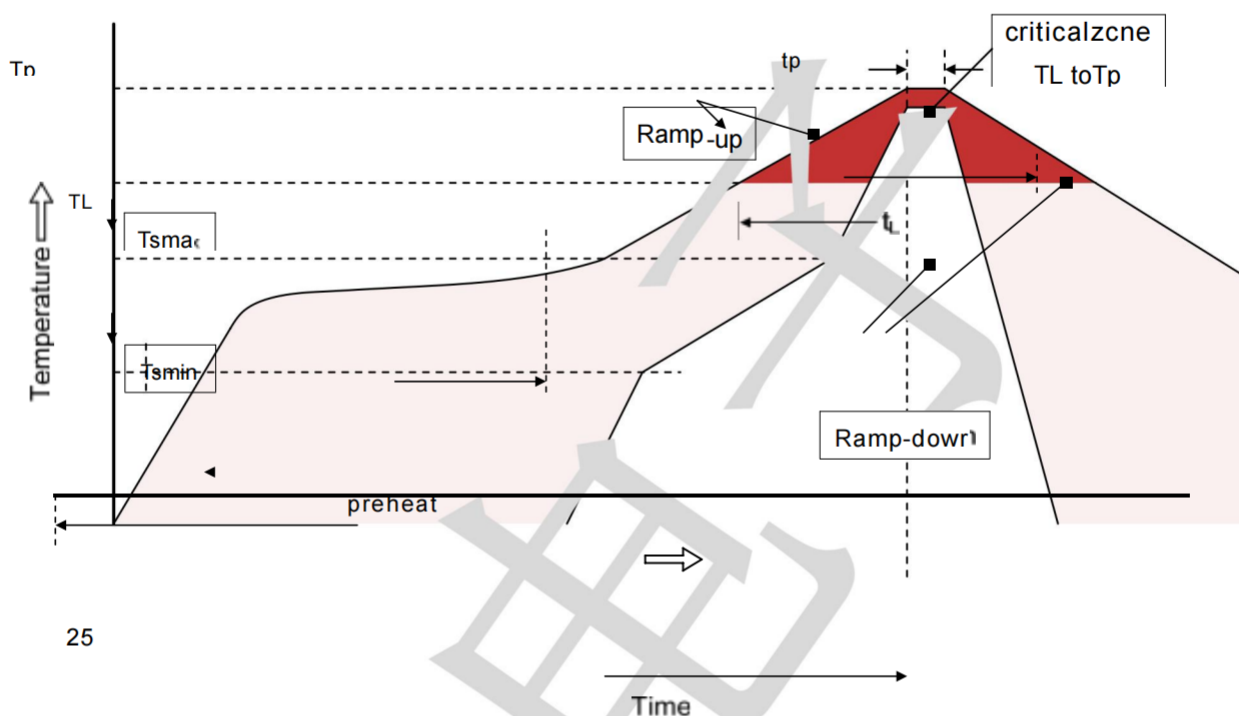

Recommended Conditions

Profile Feature	Pb-Free Assembly
Average ramp-up rate (T_L to T_P)	3°C/second max.
Preheat -Temperature Min ($T_{S\ min}$) -Temperature Max ($T_{S\ max}$) -Time (min to max) (ts)	150°C 200°C 60-180 seconds
$T_{S\ max}$ to T_L -Ramp-up Rate	3°C/second max.
Time maintained above: -Temperature (T_L) -Time (t_L)	217°C 60-150 seconds
Peak Temperature (T_P)	260°C
Time within 5°C of actual Peak Temperature (t_P)	20-40 seconds
Ramp-down Rate	6°C/second max.
Time 25°C to Peak Temperature	8 minutes max.

Package Outline Dimensions (unit: mm)

SOD-123FL



Mounting Pad Layout (unit: mm)



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [ESD Suppressors / TVS Diodes](#) ***category:***

Click to view products by [TECH PUBLIC](#) ***manufacturer:***

Other Similar products are found below :

[60KS200C](#) [D5V0F4U5P5-7](#) [NTE4902](#) [P4KE27CA](#) [P6KE11CA](#) [JAN1N6461](#) [P6KE8.2A](#) [JANTX1N6053A](#) [SA60CA](#) [SA64CA](#)
[SMBJ12CATR](#) [SMBJ33CATR](#) [SMBJ8.0A](#) [ESD101-B1-02ELS E6327](#) [ESD112-B1-02EL E6327](#) [ESD7451N2T5G](#) [19180-510](#) [CPDT-](#)
[5V0USP-HF](#) [3.0SMCJ33CA-F](#) [3.0SMCJ36A-F](#) [HSPC16701B02TP](#) [JAN1N6472](#) [JANTX1N6052A](#) [JANTX1N6462](#) [D3V3Q1B2DLP3-7](#)
[DRTR5V0U4SL-7](#) [SCM1293A-04SO](#) [ESD200-B1-CSP0201 E6327](#) [SM12-7](#) [CEN955 W/DATA](#) [ESD101-B1-02EL E6327](#) [AOZ8808DI-03](#)
[5KP48A](#) [5KP90A](#) [ESD3V3D7-TP](#) [15KPA36A-LF](#) [P4KE56CA](#) [P4KE68A](#) [P6KE120A](#) [P6KE13CA](#) [P6KE43CA](#) [P6KE6.8CA](#) [P6KE8.2](#)
[P6SMBJ20CA](#) [JANTX1N6072A](#) [SR2835ESKG](#) [SA90CA](#) [SA8.5A](#) [SA5.0CA](#) [SA18A](#)