

Features


- Very small SOT23-5 (2.9 × 1.6 × 1.1mm) 5 - pin package
- Same electrical characteristics as 74HC Series
- Power voltage range : 2.0 ~ 6.0V
- Operation temp. range : -40 ~ +85°C
- | IOH | = IOL = 2mA (min)

General Description

TC7S02F are CMOS 2-input NOR gate ICs. They realize a high speed operation similar to LS-TTL with a lower power consumption by CMOS features. An inner circuit structure of 3-stages logic gates obtains wider noise immunity and constant output.

Pin Configuration

TOP VIEW



SOT23-5

Marking : 7S02F

Function Table

Pin No.	Pin Name
1	INB
2	INA
3	GND
4	OUTX
5	VCC

Input		Output
INA	INB	OUTX
Low	Low	High
Low	High	Low
High	Low	Low
High	High	Low

Maximum Absolute Ratings

Parameter	Symbol	Value	Units
Power Voltage	VCC	-0.5 ~ +7.0	V
Input Voltage	VIN	-0.5 ~ VCC+0.5	V
Output Voltage	VOUT	-0.5 ~ VCC+0.5	V
Input Protection Diode Current	I _{IK}	± 20	mA
Output Parasitic Diode Current	I _{OK}	± 20	mA
Output Current	I _{OUT}	± 25	mA
VCC/GND Current	I _{CC} , I _{GND}	± 25	mA
Power Dissipation	P _d	200	mW
Storage Temp.	T _{stg}	-65 ~ +150	°C

Applications

- Voltage Level Shifting
- General Purpose Logic
- Power Down Signal Isolation
- Wide array of products such as:
 - PCs, Networking, Notebooks, Netbooks, PDAs
 - Tablet Computers, E-readers
 - Computer Peripherals, Hard Drives, CD/DVD ROM
 - TV, DVD, DVR, Set-Top Box
 - Cell Phones, Personal Navigation / GPS
 - MP3 Players, Cameras, Video Recorders

Suggested Operating Condition

Parameter	Symbol	Value	Units
Power Voltage	VCC	2.0~6.0	V
Input Voltage	VIN	0~VCC	V
Output Voltage	VOU	0~VCC	V
Operating Temp.	Top	-40~+85	°C
High-input, Down-time	tr,tf	0~1000 (VCC=2.0V)	ns
		0~500 (VCC=4.5V)	
		0~400 (VCC=6.0V)	

DC Electrical Characteristics

Parameter	Sym.	VCC	Top = 25°C			Top = -40~+85°C		Units	Conditions	
			Min.	Typ.	Max.	Min.	Max.			
Input Voltage	VIH	2.0	1.5	—	—	1.5	—	V		
		4.5	3.15	—	—	3.15	—			
		6.0	4.2	—	—	4.2	—			
	VIL	2.0	—	—	0.5	—	0.5	V		
		4.5	—	—	1.35	—	1.35			
		6.0	—	—	1.8	—	1.8			
Output Voltage	VOH	2.0	1.9	2.0	—	1.9	—	V	VIN=VIL	IOH = -20 μA
		4.5	4.4	4.5	—	4.4	—			
		6.0	5.9	6.0	—	5.9	—			
		4.5	4.18	4.35	—	4.13	—		IOH = -2mA	
		6.0	5.68	5.83	—	5.63	—			
	VOL	2.0	—	0.0	0.1	—	0.1	V	VIN=VIH or VIL	IOL = 20 μA
		4.5	—	0.0	0.1	—	0.1			
		6.0	—	0.0	0.1	—	0.1			
		4.5	—	0.12	0.26	—	0.33		IOL = 2mA	
		6.0	—	0.13	0.26	—	0.33			
Input Current	IIN	6.0	-0.1	—	0.1	-1.0	1.0	μA	VIN = VCC or GND	
Static Current	ICC	6.0	—	—	1.0	—	10.0	μA	VIN = VCC or GND	

AC Electrical Characteristics

(CL=15pF, tr=tf=6ns, VCC=5V)


Parameter	Sym.	Top = 25°C			Units	Conditions
		Min.	Typ.	Max.		
High Output Down-time	tTLH	—	4	10	ns	Refer to following test circuit
	tTHL	—	3	10		
Propagation Delay-time	tPLH	—	5	15	ns	Refer to following test circuit
	tPHL	—	5	15		

(CL=50pF, tr=tf=6ns)

Parameter	Sym.	VCC	Top = 25°C			Top = -40~+85°C		Units	Conditions
			Min.	Typ.	Max.	Min.	Max.		
High-Output Down-time	tTLH	2.0	—	21	125	—	155	ns	Refer to test circuit
		4.5	—	8	25	—	31		
		6.0	—	7	21	—	26		
	tTHL	2.0	—	16	125	—	155	ns	
		4.5	—	7	25	—	31		
		6.0	—	6	21	—	26		
Propagation Delay-time	tPLH	2.0	—	19	100	—	125	ns	Refer to test circuit
		4.5	—	8	20	—	25		
		6.0	—	7	17	—	21		
	tPHL	2.0	—	17	100	—	125	ns	
		4.5	—	7	20	—	25		
		6.0	—	6	17	—	21		
Input Capacity	CIN	—	—	5	10	—	10	pF	
Equivalent Inner Capacity	CPD	—	—	10	—	—	—	pF	


* CPD is IC's Inner equivalent capacity which is calculated from non-loaded operating current consumption referred to following test circuit. Averaged operating current consumption at non-load is calculated as following formula;
 $ICC (opr) = CPD \cdot VCC \cdot f_{IN} + ICC$

Test Circuit And Waveforms




* Output should be opened when measuring current consumption.

Measured Wave Pattern

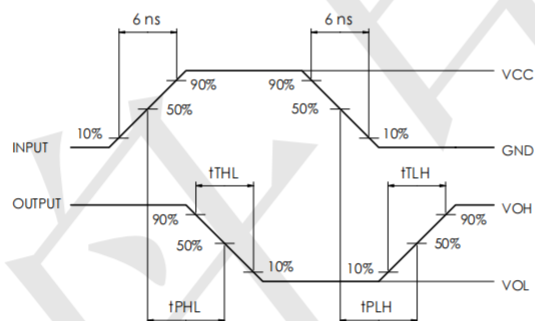


Package Outline Dimensions (Unit: mm)

SOT23-5

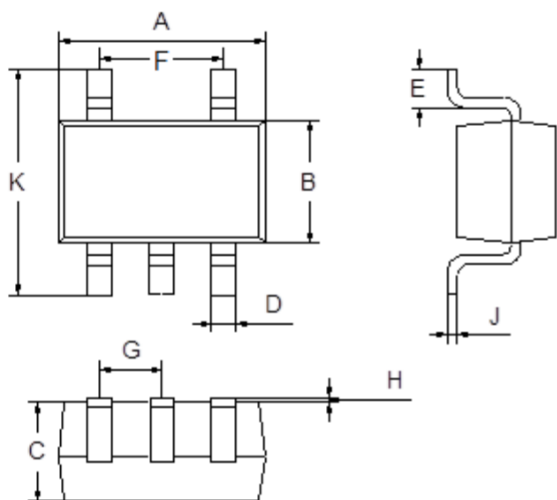

Dimension	Min.	Max.
A	2.80	3.00
B	1.50	1.70
C	1.00	1.20
D	0.35	0.45
E	0.35	0.55
F	1.80	2.00
G	0.90	1.00
H	0.02	0.10
J	0.10	0.20
K	2.60	3.00

Mounting Pad Layout (Unit: mm)

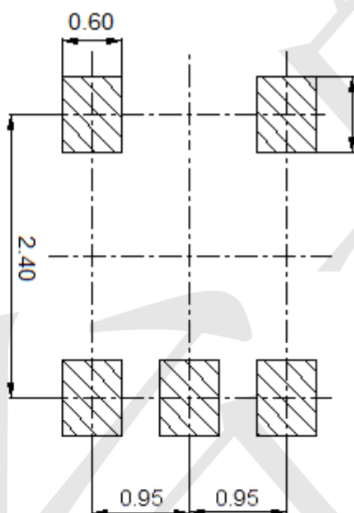

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Logic Gates](#) category:

Click to view products by [TECH PUBLIC](#) manufacturer:

Other Similar products are found below :

[NL17SG32DFT2G](#) [NLVVHC1G14DTT1G](#) [CD4068BE](#) [NLU1G32CMUTCG](#) [NLVVHC1G05DFT2G](#) [NLX1G11AMUTCG](#)
[NLX1G97MUTCG](#) [74LVC1G08Z-7](#) [74LVC32ADTR2G](#) [NLV17SZ00DFT2G](#) [NLV17SZ126DFT2G](#) [NLV27WZ17DFT2G](#)
[NLV74HC02ADR2G](#) [74HC32S14-13](#) [74LS133](#) [NLV74HC14ADR2G](#) [NLV74HC20ADR2G](#) [NLVVHC1G09DFT1G](#) [NLX2G86MUTCG](#)
[74LVC2G32RA3-7](#) [74LVC2G00HD4-7](#) [NL17SG02P5T5G](#) [74LVC2G86HK3-7](#) [NLX1G99DMUTWG](#) [NLV74VHC04DTR2G](#)
[NLV27WZ00USG](#) [NLU1G86CMUTCG](#) [NLU1G08CMUTCG](#) [NL17SZ00P5T5G](#) [NL17SH02P5T5G](#) [NLV74HC02ADTR2G](#)
[NLX1G332CMUTCG](#) [NLVHCT132ADTR2G](#) [NL17SG86P5T5G](#) [NLVVHC1G02DFT1G](#) [NLV74HC86ADR2G](#) [74LVC2G86HD4-7](#)
[NL17SZ38DBVT1G](#) [NLV18SZ00DFT2G](#) [NLVHCT541ADTR2G](#) [NLVVHC1G07DFT1G](#) [NLV27WZ32USG](#) [NLVHC1G08DTT1G](#)
[RS4G08XP](#) [RS4G32XP](#) [RS4G00XP](#) [SN74AS30DR](#) [74LVC1G97GW-Q100](#) [RS1G38XC5](#) [RS1G240XC5](#)