

General Description

The TP2803 series are a group of low-dropout (LDO) voltage regulators offering the benefits of wide input voltage range from 1.2V to 5.5V, low dropout voltage, low power consumption, and miniaturized packaging. Quiescent current of only 2 μ A makes these devices ideal for powering the battery-powered, always-on systems that require very little idle-state power dissipation to a longer service life. There is an option of

Features

- 2 μ A Ground Current at no Load
- $\pm 2\%$ Output Accuracy
- 400mA Output Current
- 10nA Disable Current (by option)
- Wide Operating Input Voltage Range: 1.2V to 5.5V
- Dropout Voltage: 0.18V at 300mA ($V_{OUT}=3.3V$)
- Support Fixed Output Voltage 0.8V, 0.9V, 1.2V, 1.5V, 1.8V, 2.5V, 2.8V, 3.0V, 3.3V
- Adjustable Output Voltage Available by Specific Application
- Stable with Ceramic or Tantalum Capacitor
- Current Limit Protection
- Over-Temperature Protection
- SOT-23-5 Packages Available

shutdown mode by selecting the parts with the EN pin and pulling it low. The shutdown current in this mode goes down to only 10nA (typical).

The TP2803 series of linear regulators are stable with the ceramic output capacitor over its wide input range from 1.2V to 5.5V and the entire range of output load current (0mA to 400mA).

Applications

- Portable, Battery Powered Equipment
- Low Power Microcontrollers
- Laptop, Palmtops and PDAs
- Wireless Communication Equipment
- Audio/Video Equipment

Ordering Information


TP2803E33-5

-5:SOT23-5 Package


Output voltage: 12=1.2V
15=1.5V
18=1.8V
30=3.0V
33=3.3V
XX=X.XV



BLOCK DIAGRAM

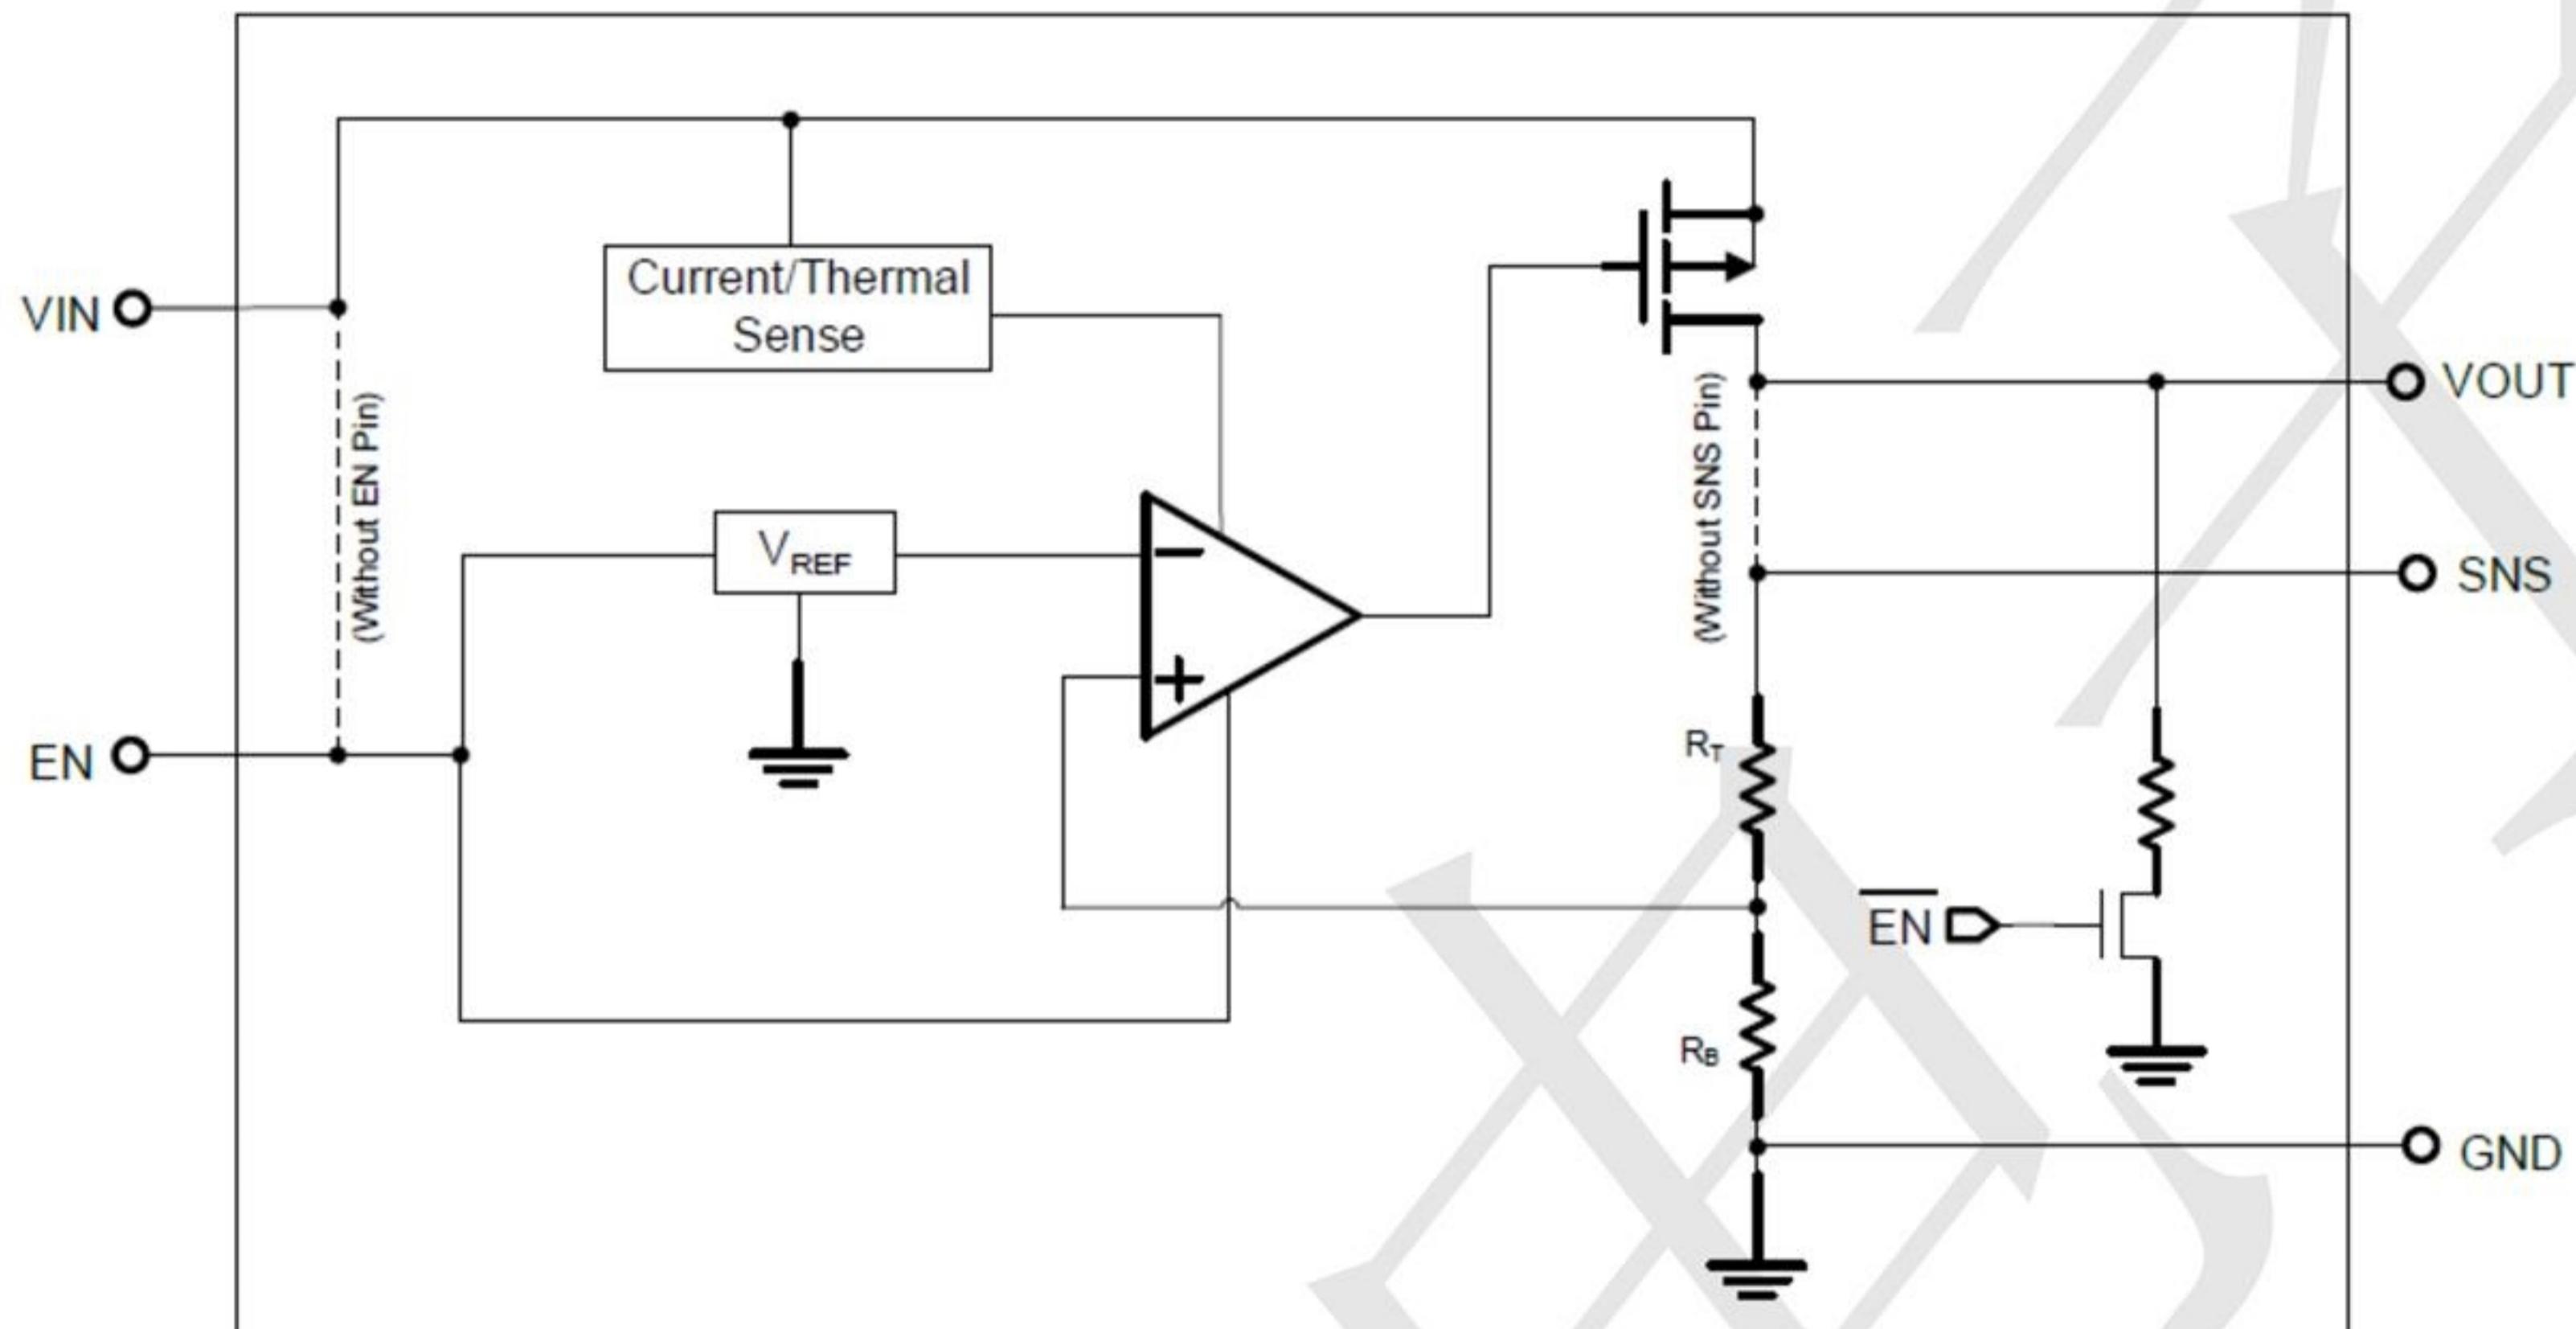

PIN CONFIGURATION

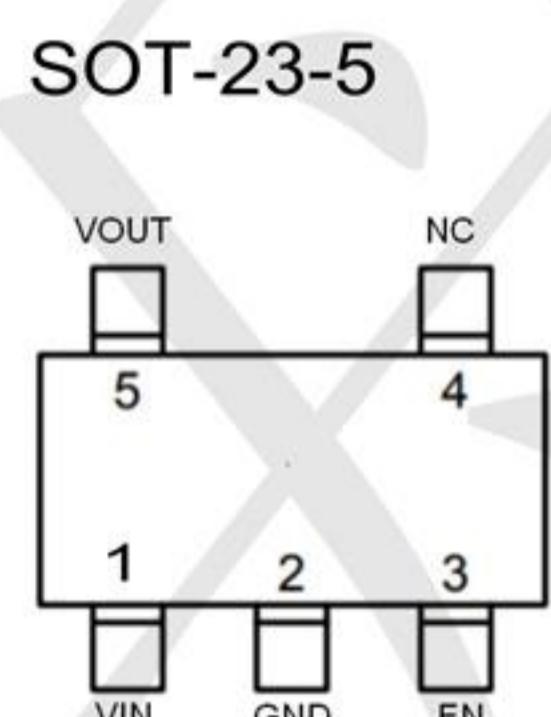

Pin No				Pin Name	Pin Function
SOT-23-3	SOT-23-5	DFN-1X1	DFN-2X2		
1	2	2	3	GND	Ground
2	5	1	1	VOUT	Output of the Regulator
3	1	4	6	VIN	Input of Supply Voltage.
	3	3	4	EN	Enable Control Input.
	4		2,5	NC	No internal connection

Absolute Maximum Rating (T_A=25°C unless otherwise noted)

VIN Pin to GND Pin Voltage	-0.3V to 6.5V
VOUT Pin and EN Pin to GND Pin Voltage	-0.3V to 6V
VOUT Pin to VIN Pin Voltage	-6V to 0.3V
Storage Temperature Range	-60°C~150°C
Lead Temperature (Soldering, 10 sec)	260°C
Junction Temperature	150°C
Operating Ambient Temperature Range T _A	-40°C~85°C
Thermal Resistance Junction to Case, R _{θJC}	SOT23-3 115°C/W SOT23-5 115°C/W DFN-4(1x1)..... 65°C/W DFN-6(2x2)..... 30°C/W
Thermal Resistance Junction to Ambient, R _{θJA}	SOT23-3 250°C/W SOT23-5 250°C/W DFN-4(1x1)..... 195°C/W DFN-6(2x2)..... 165°C/W












Electrical Characteristics (T =25°C unless otherwise noted)

($V_{IN}=5V$, $V_{EN}=5V$, $T_A=25^{\circ}C$, unless otherwise specified) (Note 1)

PARAMETER	TEST CONDITIONS	SYMBOL	MIN.	TYP.	MAX.	UNIT
Supply Voltage		V_{IN}	1.2		5.5	V
DC Output Voltage Accuracy	$I_{LOAD}=0.1mA$		-2		2	%
SNS Input Current	$SNS=V_{OUT}$	I_{SNS}		0.5		μA
Dropout Voltage (Note 2)	$I_{LOAD}=300mA$, $V_{OUT}\geq 3V$	V_{DROP_3V}		0.18		V
	$I_{LOAD}=300mA$, $V_{OUT}=2.8V$	$V_{DROP_2.8V}$		0.23		
	$I_{LOAD}=300mA$, $V_{OUT}=2.5V$	$V_{DROP_2.5V}$		0.23		
	$I_{LOAD}=300mA$, $V_{OUT}=1.8V$	$V_{DROP_1.8V}$		0.28		
	$I_{LOAD}=300mA$, $V_{OUT}=1.5V$	$V_{DROP_1.5V}$		0.36		
	$I_{LOAD}=300mA$, $V_{OUT}=1.2V$	$V_{DROP_1.2V}$		0.45		
GND Current	$I_{LOAD}=0mA$	I_Q		2	5	μA
Shutdown GND Current	$V_{EN}=0V$, $V_{OUT}=0V$	I_{SD}		0.1	0.5	μA
V_{OUT} Shutdown Leakage Current	$V_{EN}=0V$, $V_{OUT}=0V$	I_{LEAK}		0.1	0.5	μA
Enable Threshold Voltage	EN Rising	V_{IH}	1.0			V
	EN Falling	V_{IL}			0.4	
EN Input Current	$V_{EN}=5V$	I_{EN}		10	100	nA
Line Regulation	$I_{LOAD}=30mA$, $1.5V\leq V_{IN}\leq 5.5V$ or $(V_{OUT}+0.2V)\leq V_{IN}\leq 5.5V$	Δ_{LINE}		0.2		%
Load Regulation	$10mA\leq I_{LOAD}\leq 300mA$	Δ_{LOAD}		0.2		%
Output Current Limit	$V_{OUT}=0V$	I_{LIM}	400	600		mA
Power Supply Rejection Ratio	$V_{OUT}=1.2V$, $I_{LOAD}=5mA$, $V_{IN}=2V$, $f=100Hz$	PSRR		78		dB
	$V_{OUT}=1.2V$, $I_{LOAD}=5mA$, $V_{IN}=2V$, $f=1kHz$			75		
Output Voltage Noise	$V_{IN}=3.5V$, $I_{LOAD}=0.1A$, $BW=10Hz$ to $100kHz$, $C_{OUT}=1\mu F$, $V_{OUT}=1.2V$			80		μV_{RMS}
	$V_{IN}=3.5V$, $I_{LOAD}=0.1A$, $BW=10Hz$ to $100kHz$, $C_{OUT}=1\mu F$, $V_{OUT}=2.8V$			120		
Thermal Shutdown Temperature	$I_{LOAD}=10mA$	T_{SD}		155		$^{\circ}C$
Thermal Shutdown Hysteresis	$I_{LOAD}=10mA$	ΔT_{SD}		15		$^{\circ}C$
Discharge Resistance	$V_{EN}=0V$, $V_{OUT}=0.1V$			100		Ω

TYPICAL APPLICATION

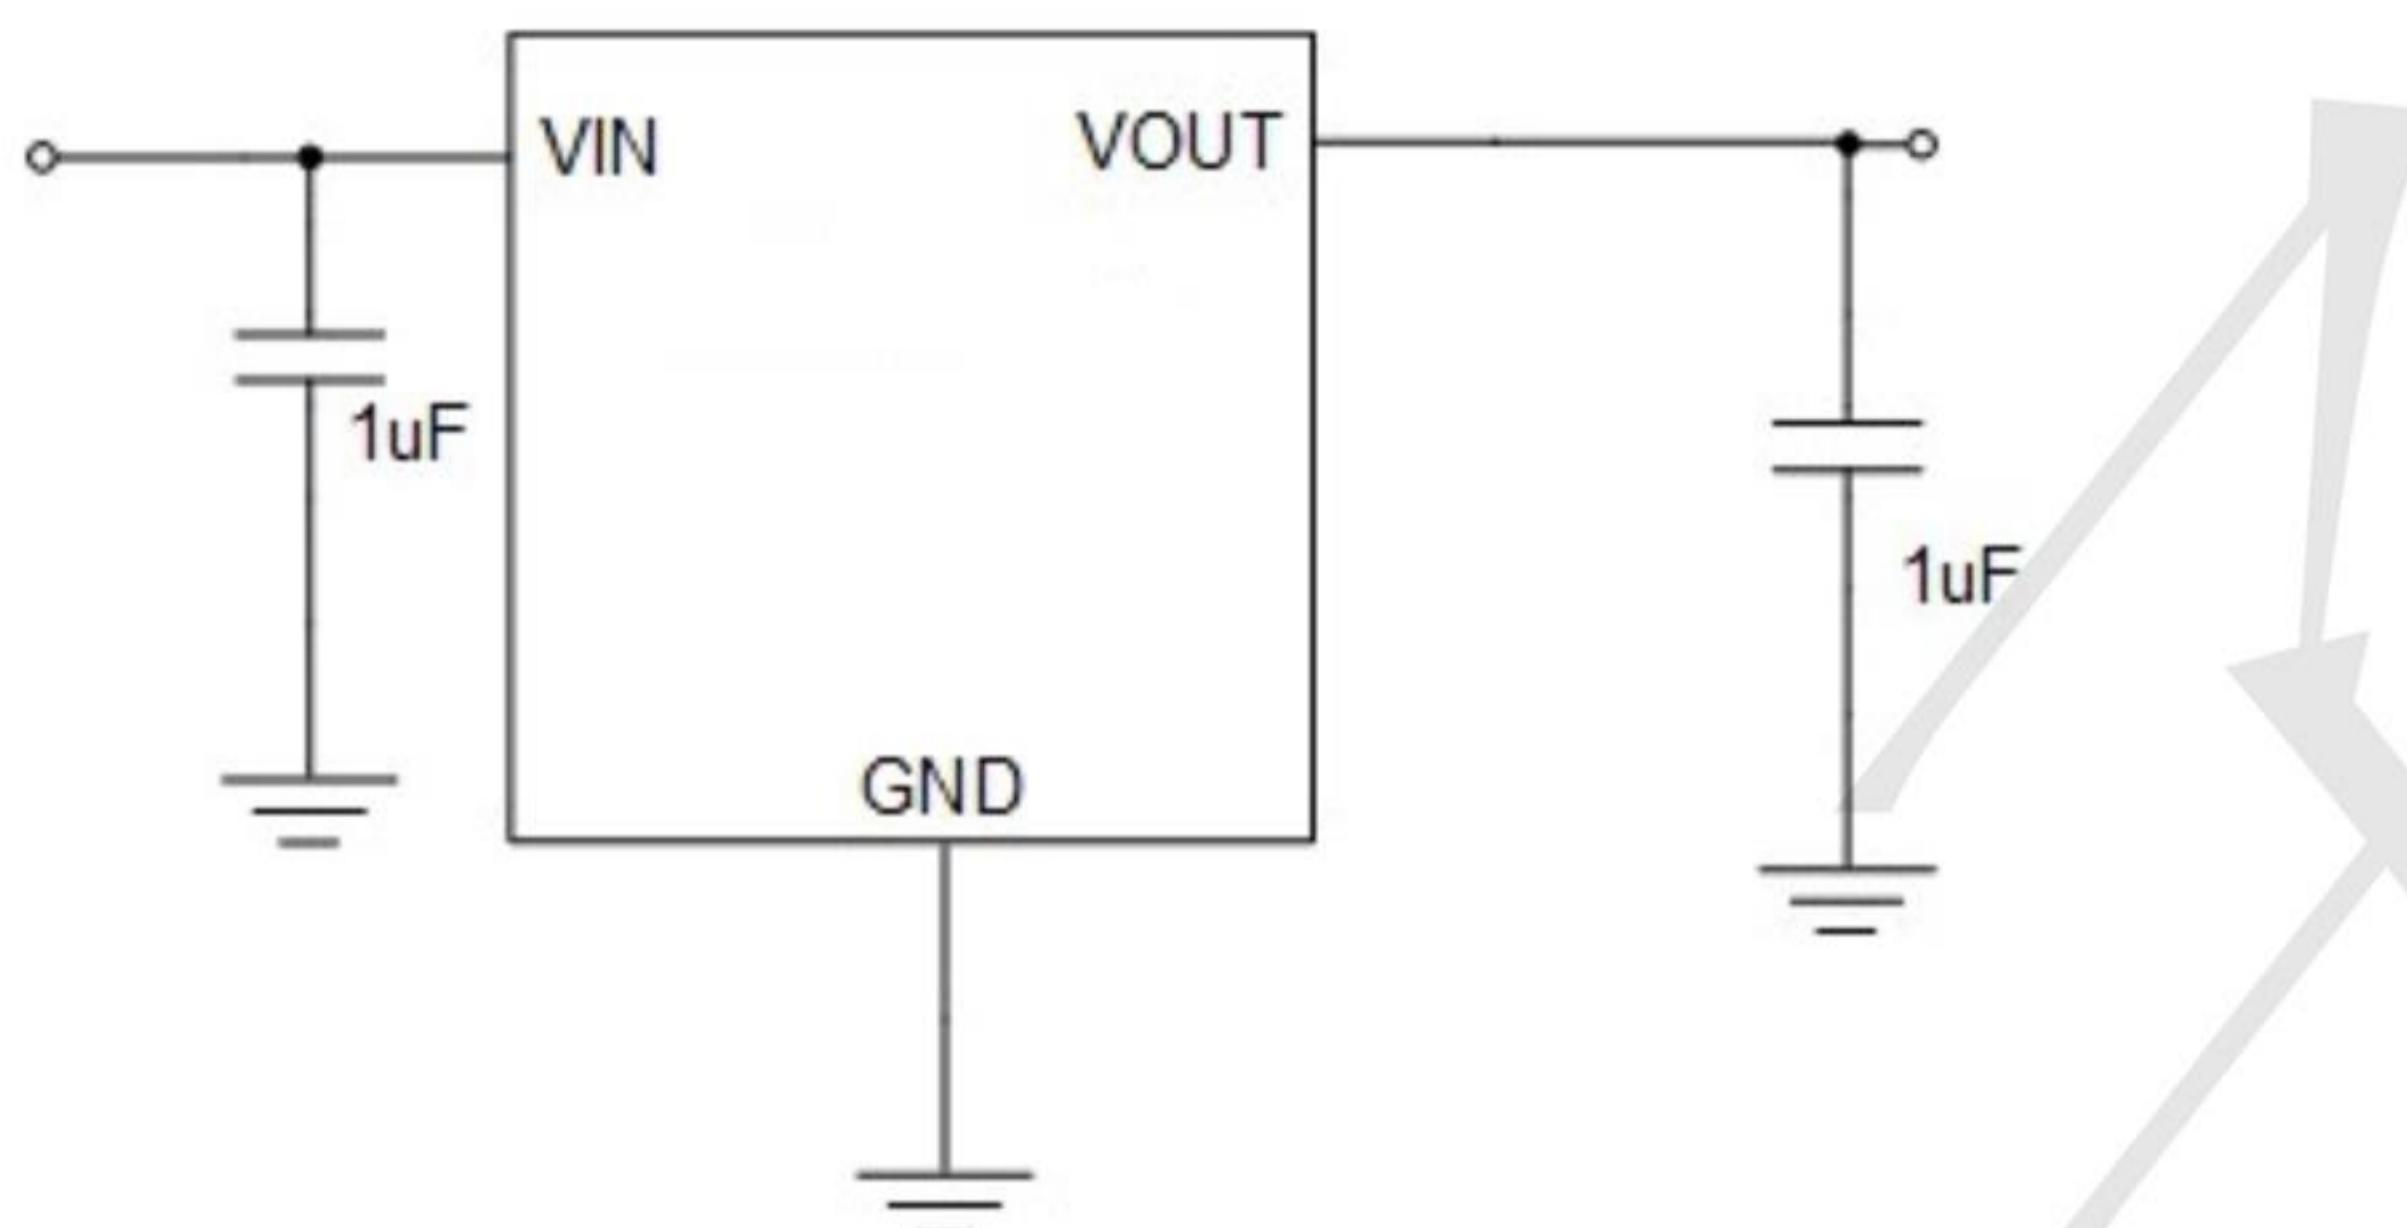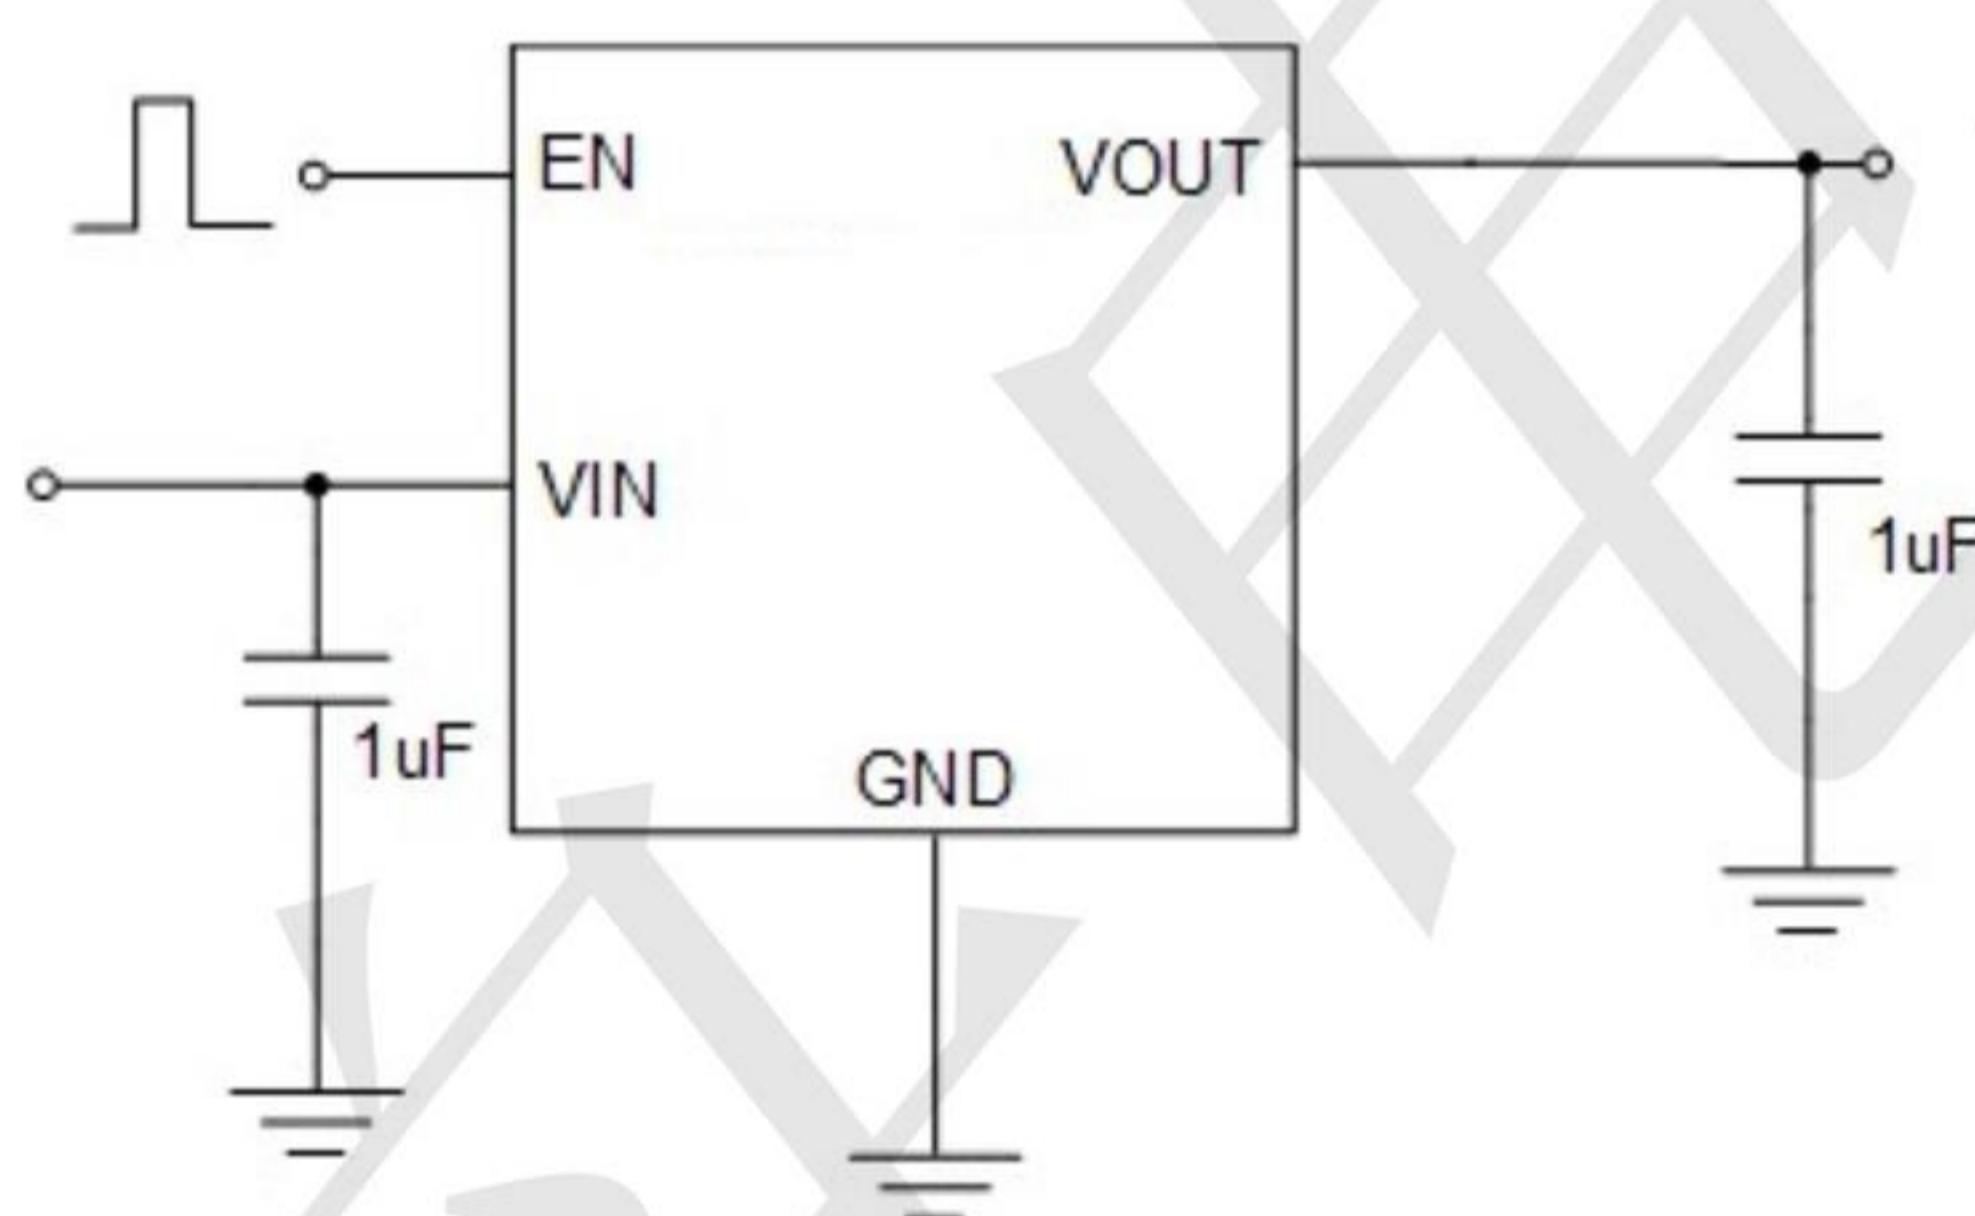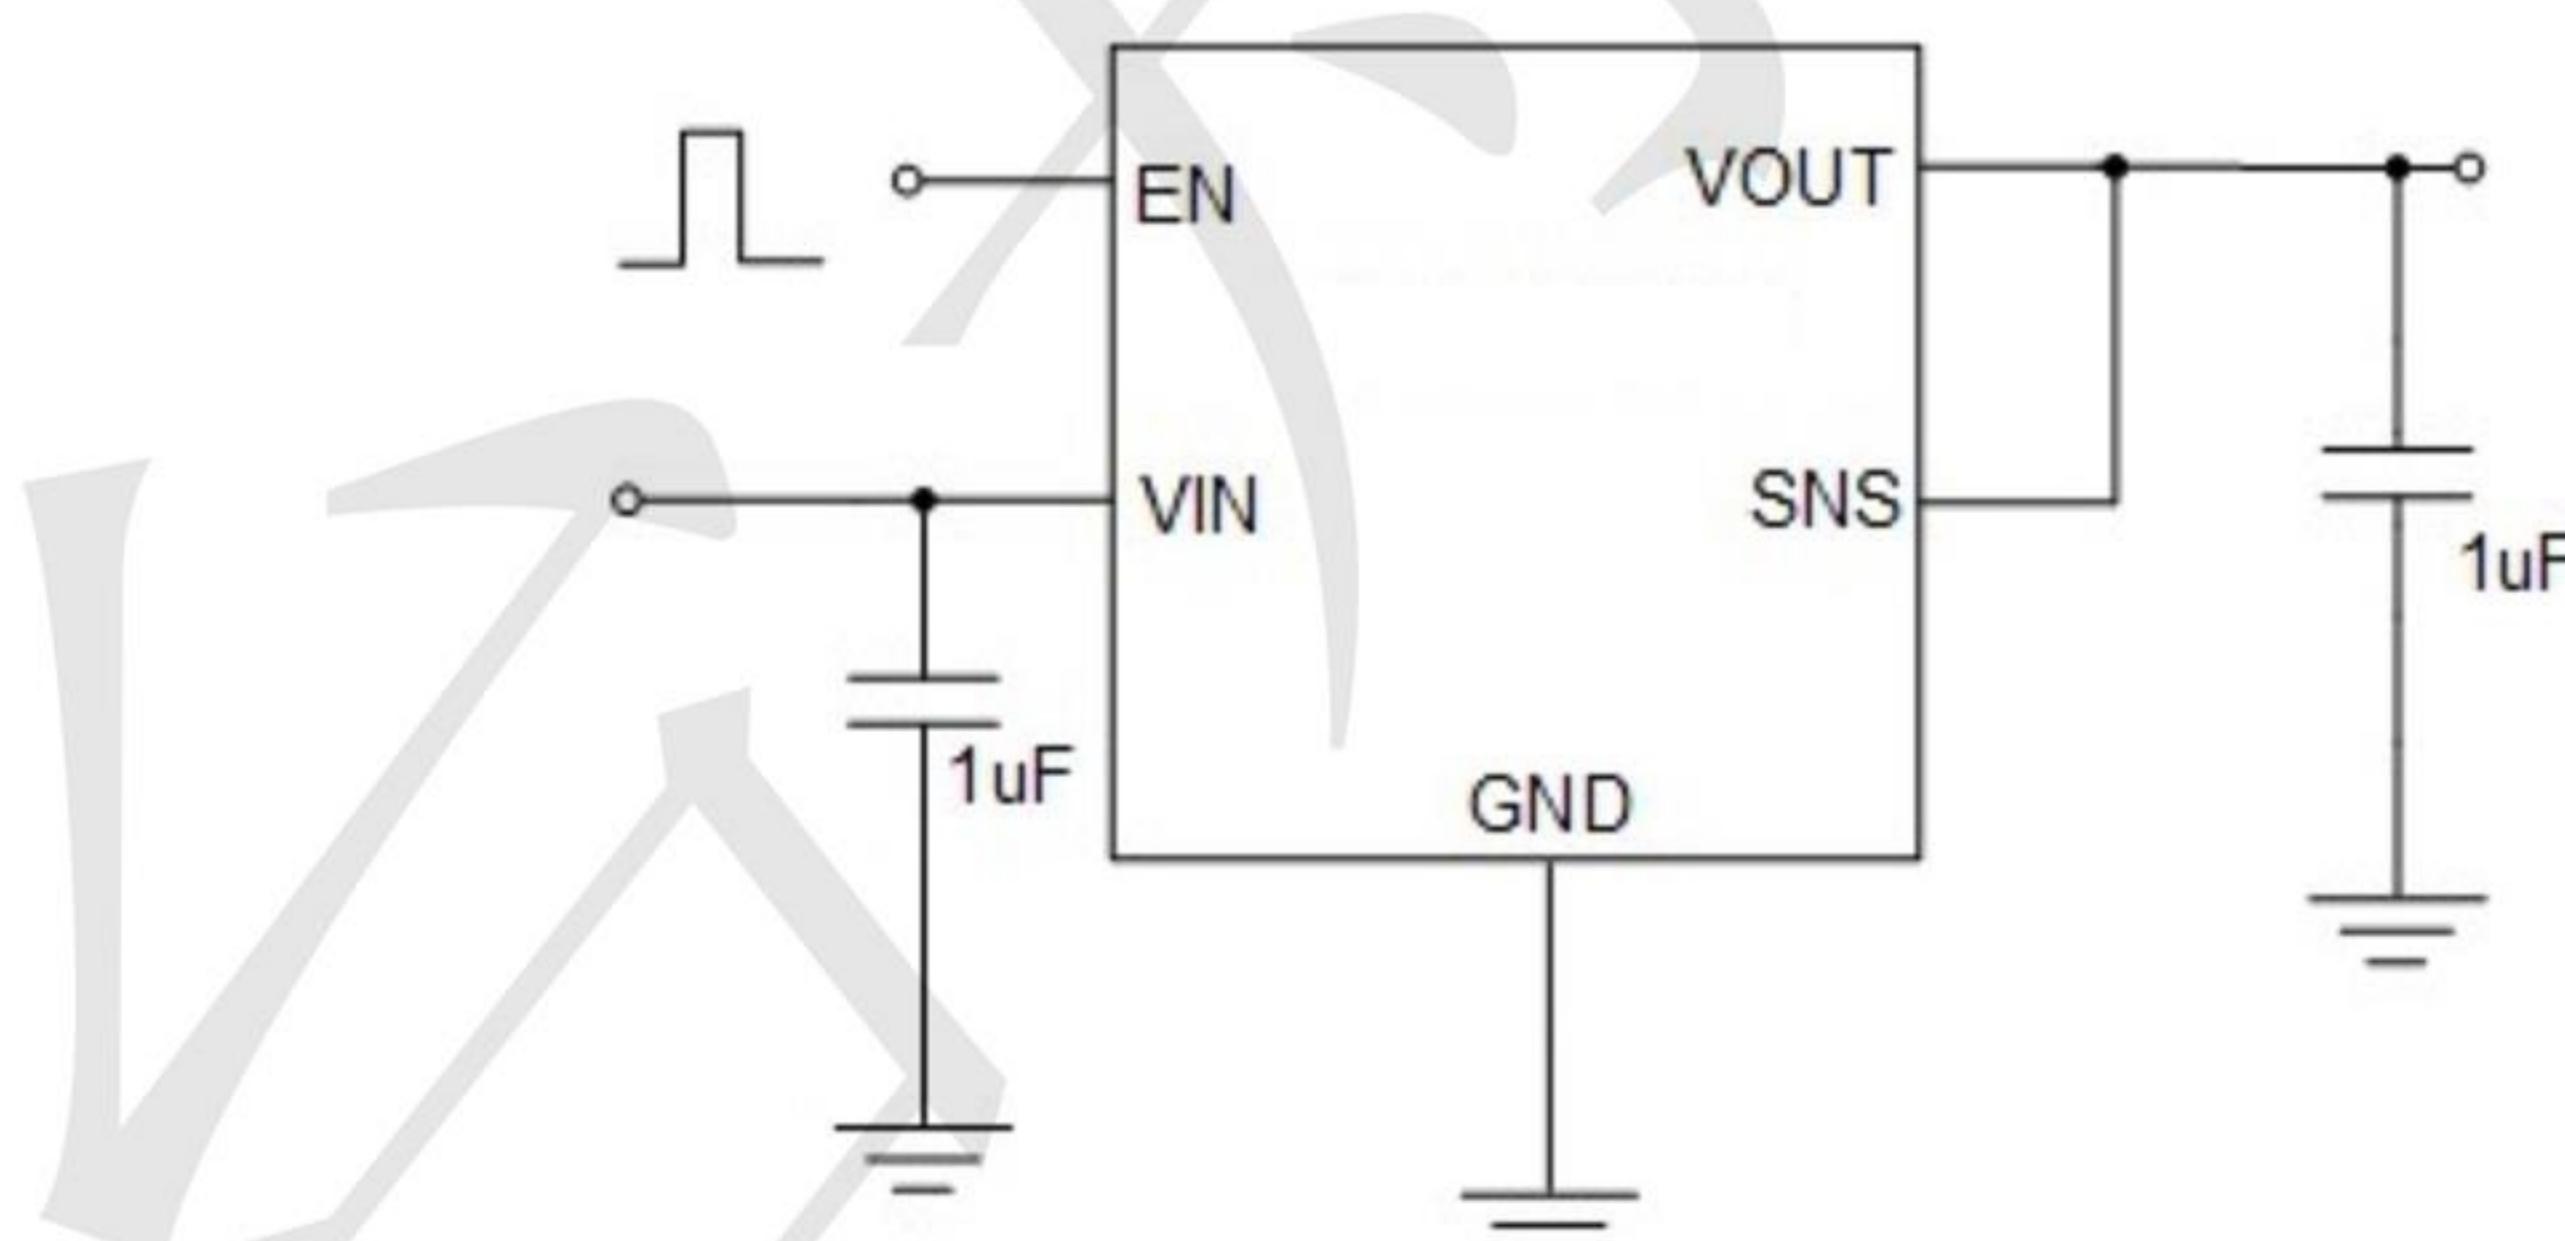Figure 1: Application circuit of Fixed V_{OUT} LDOFigure 2: Application circuit of Fixed V_{OUT} LDO with enable functionFigure 3: Application circuit of Fixed V_{OUT} LDO with enable and sense functions

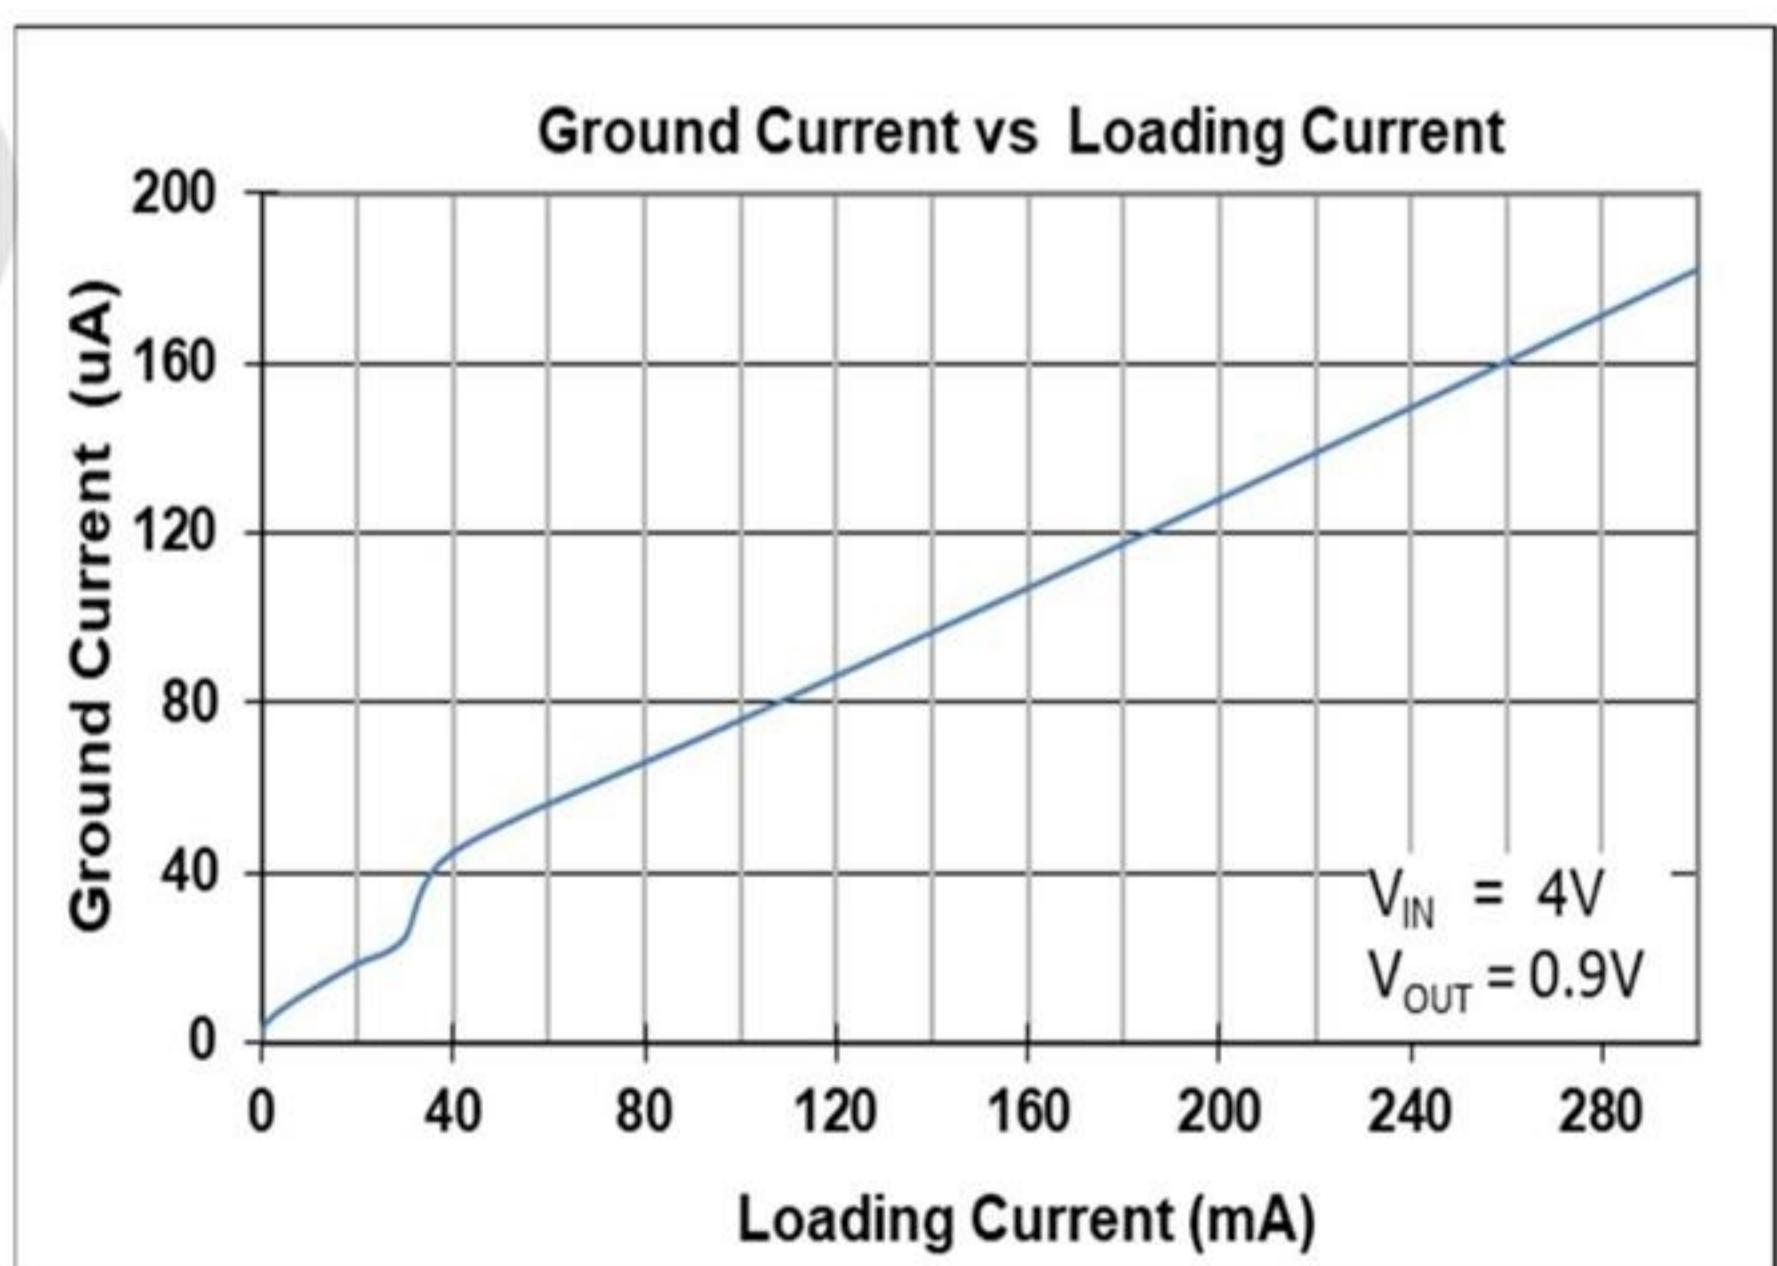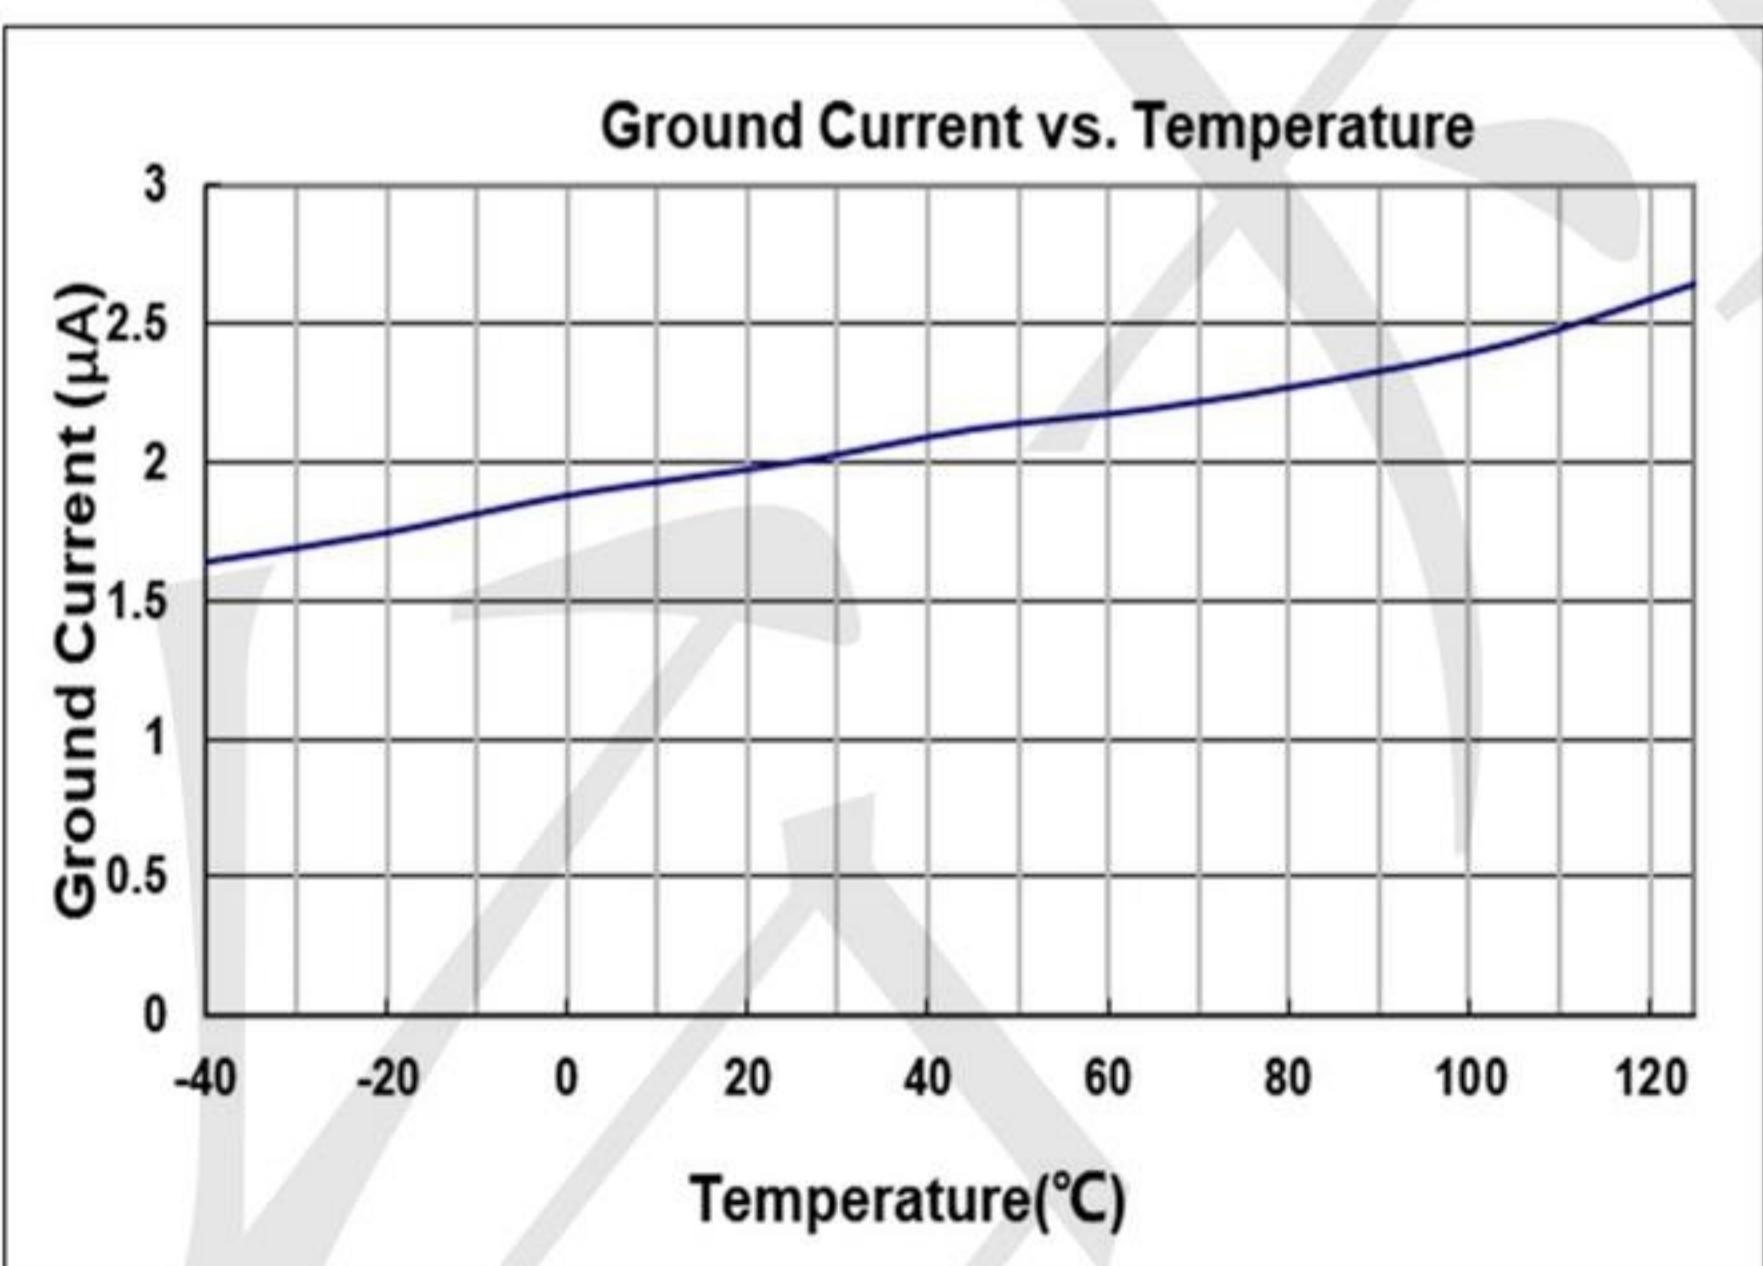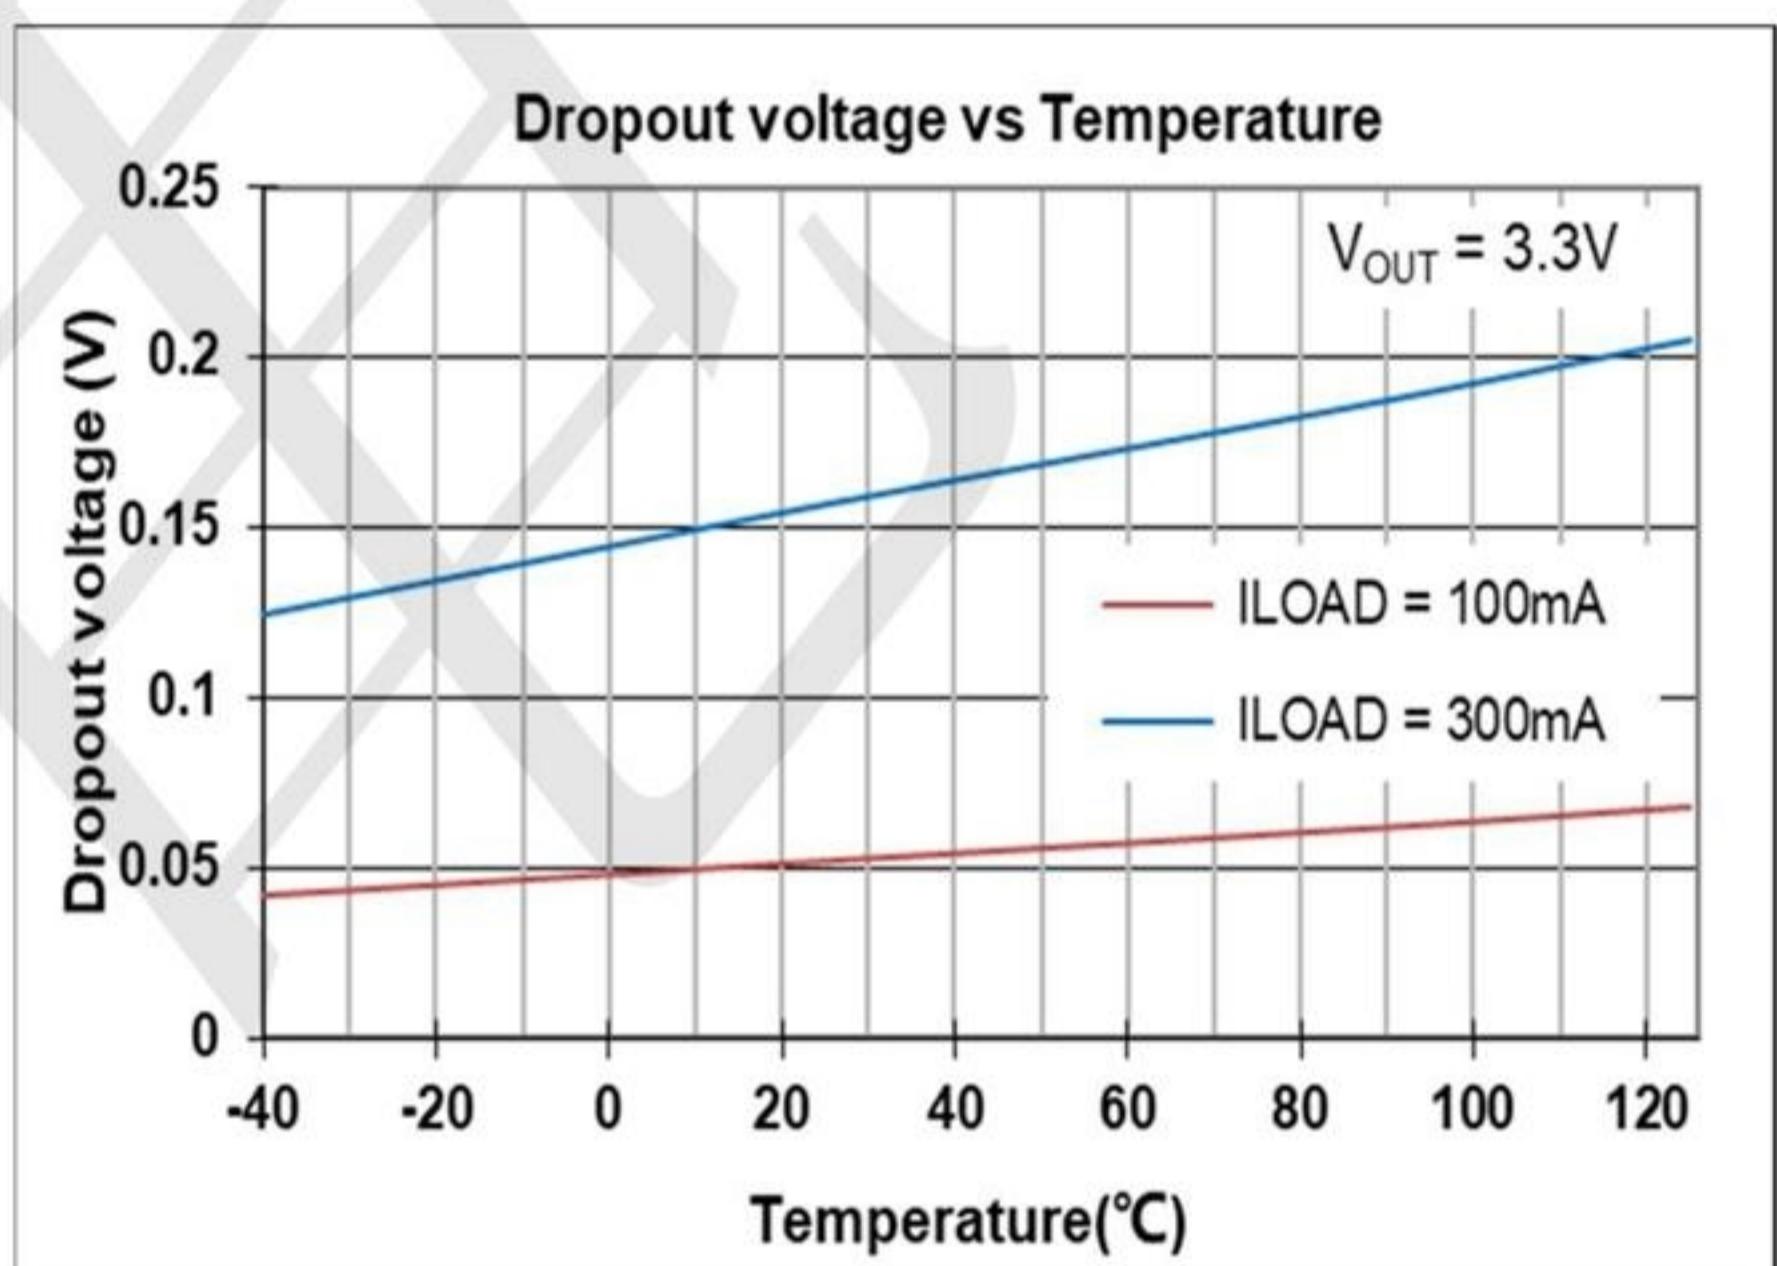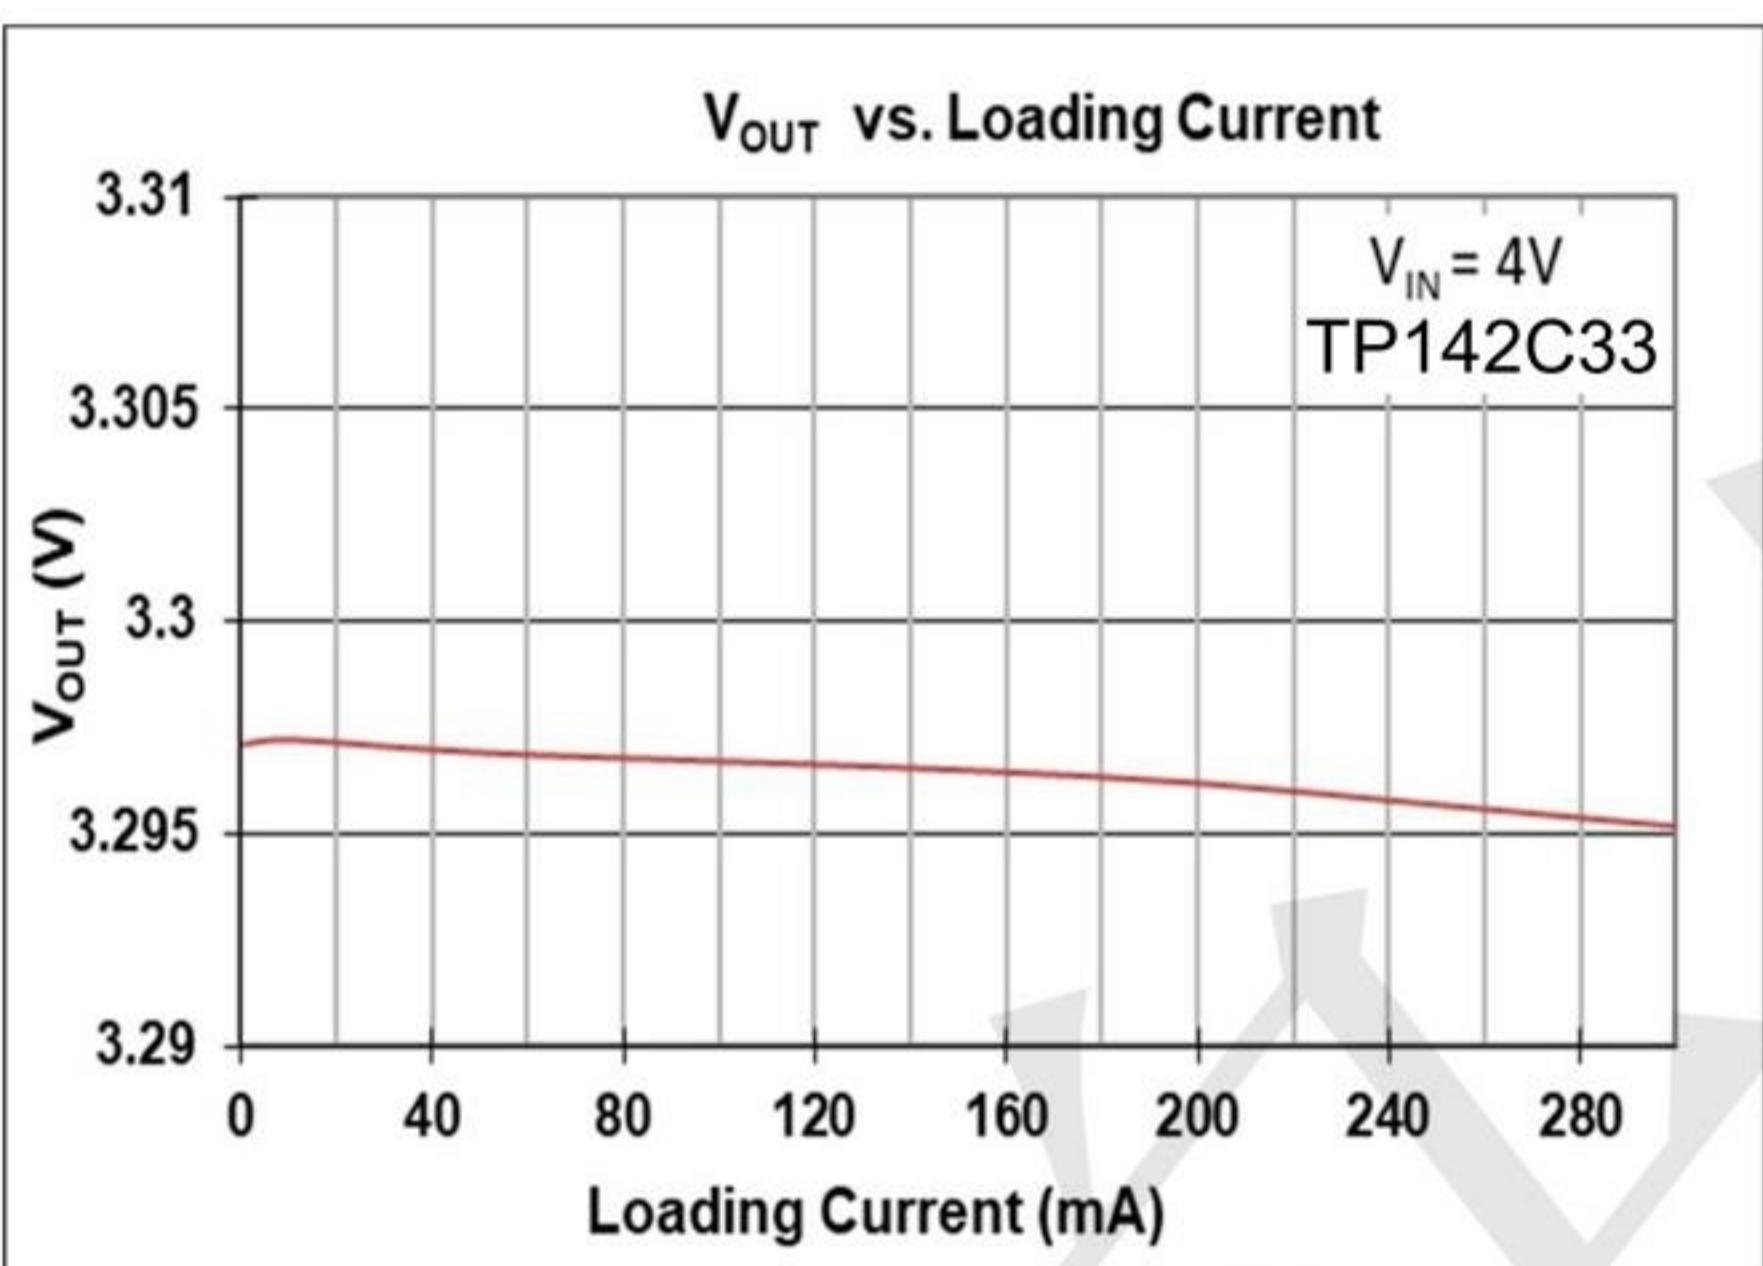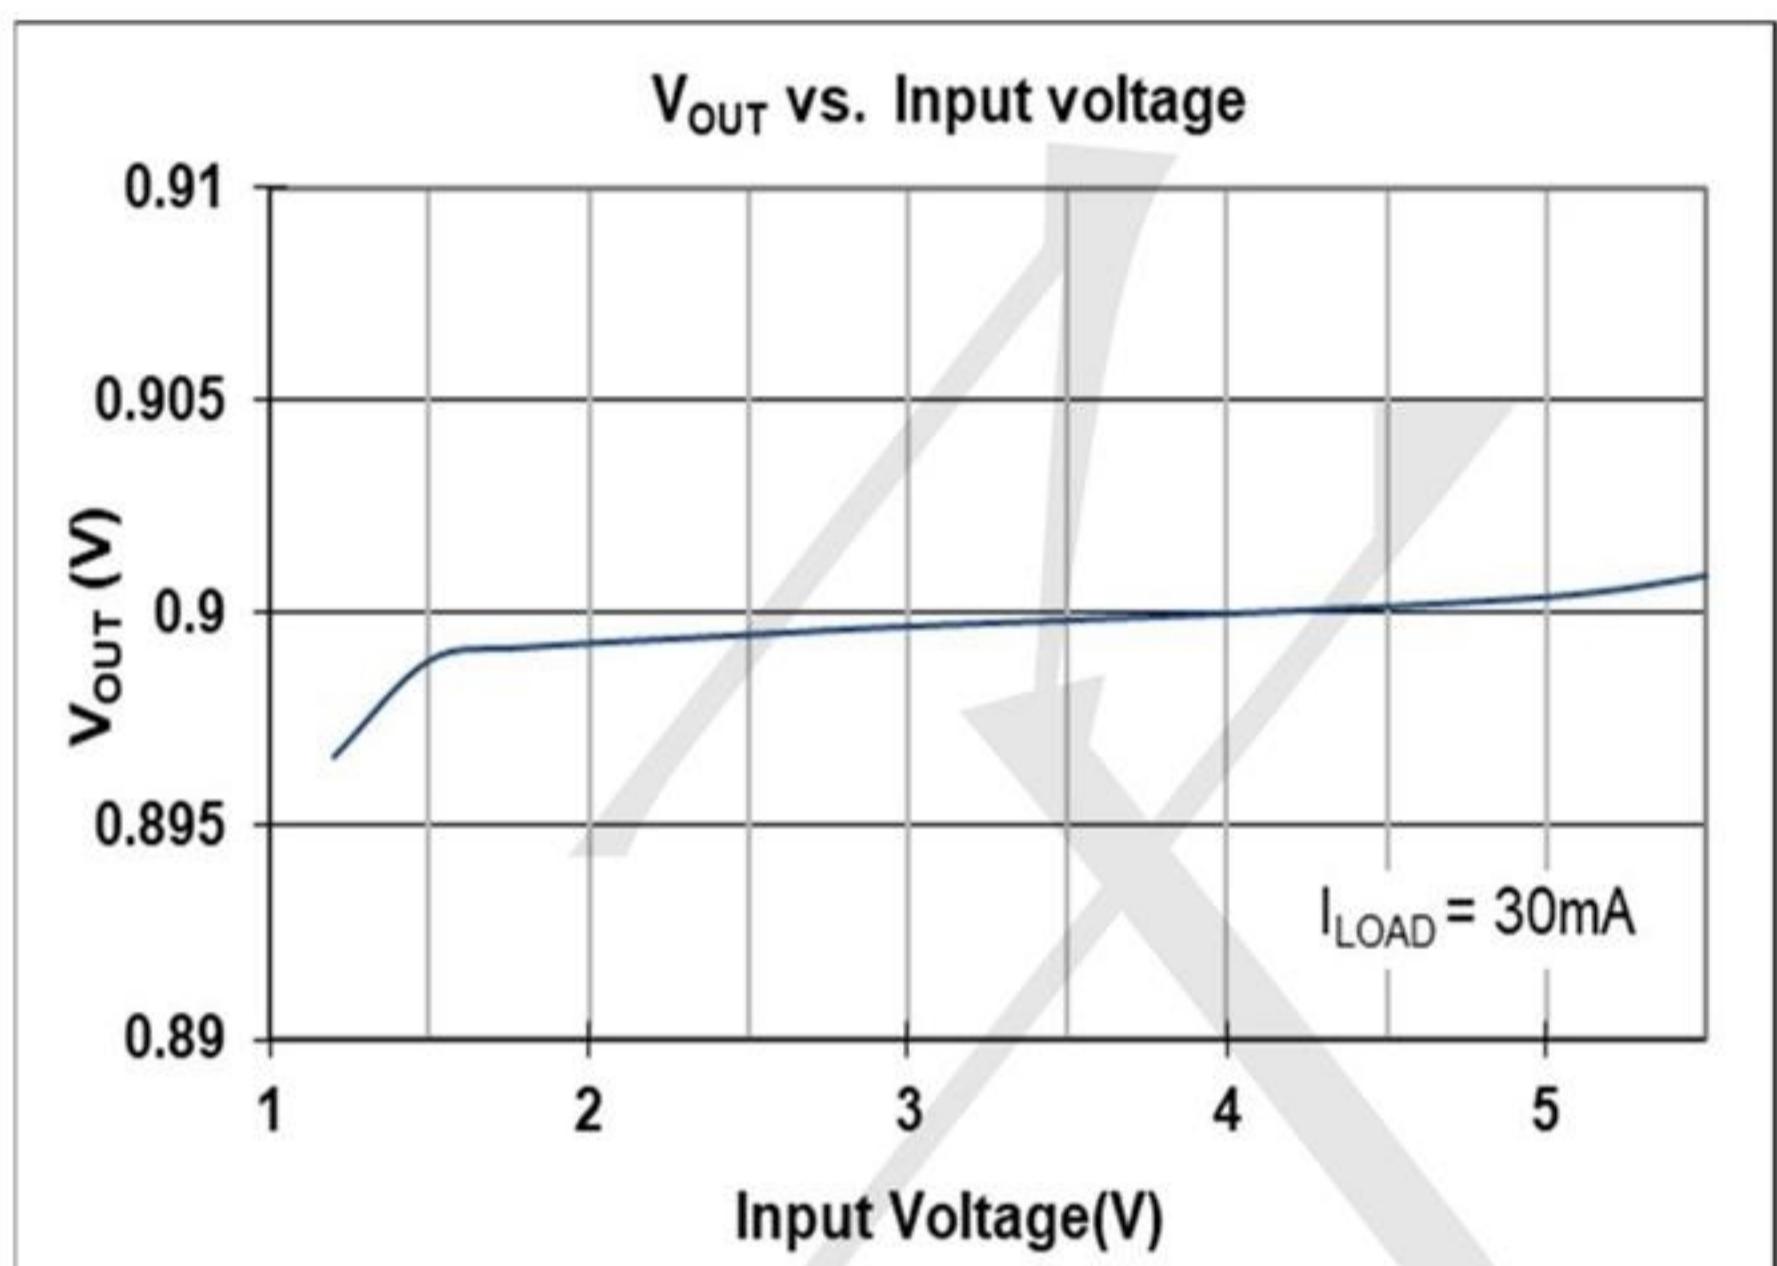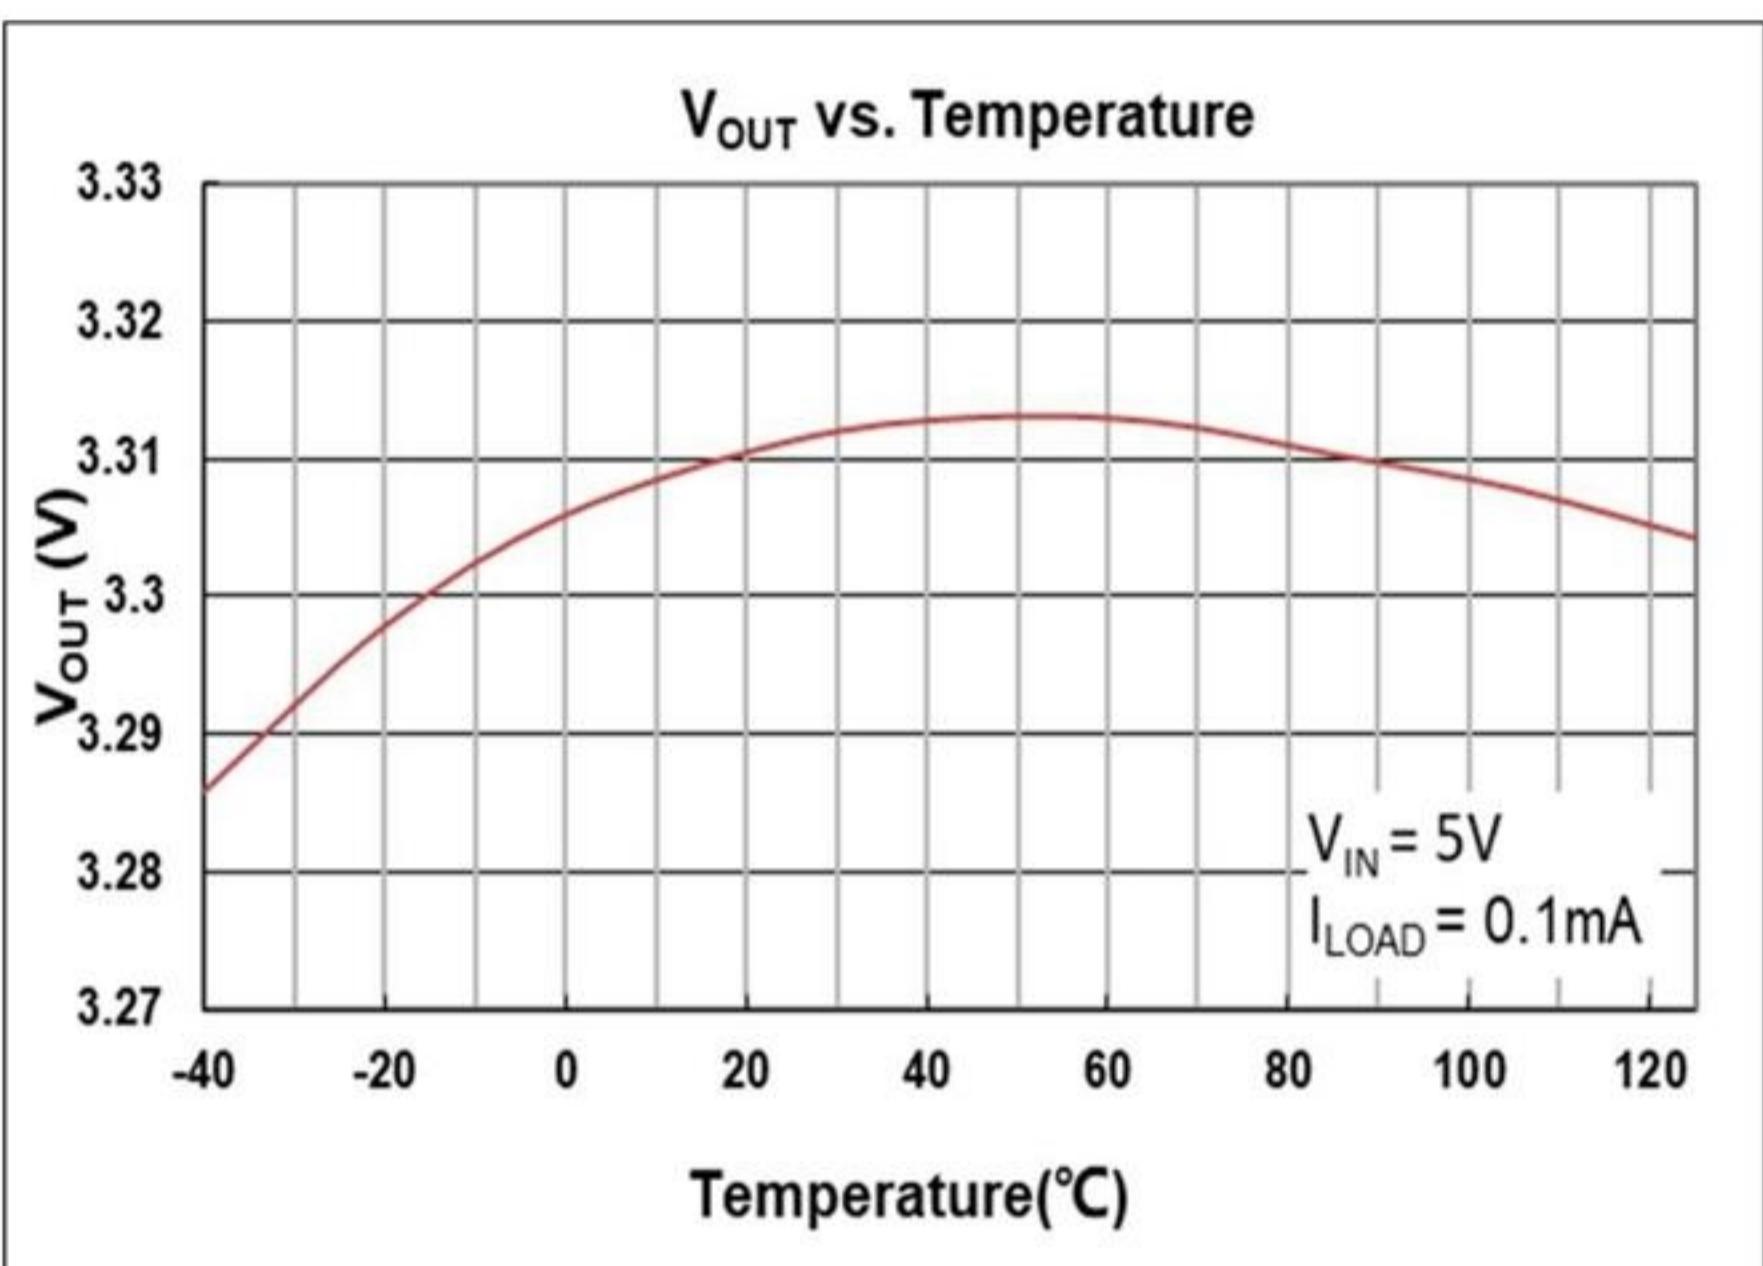









TECH PUBLIC

—台舟电子—

TP2803E33-5

400mA 2uA Higt PSRR Voltage Reaulators

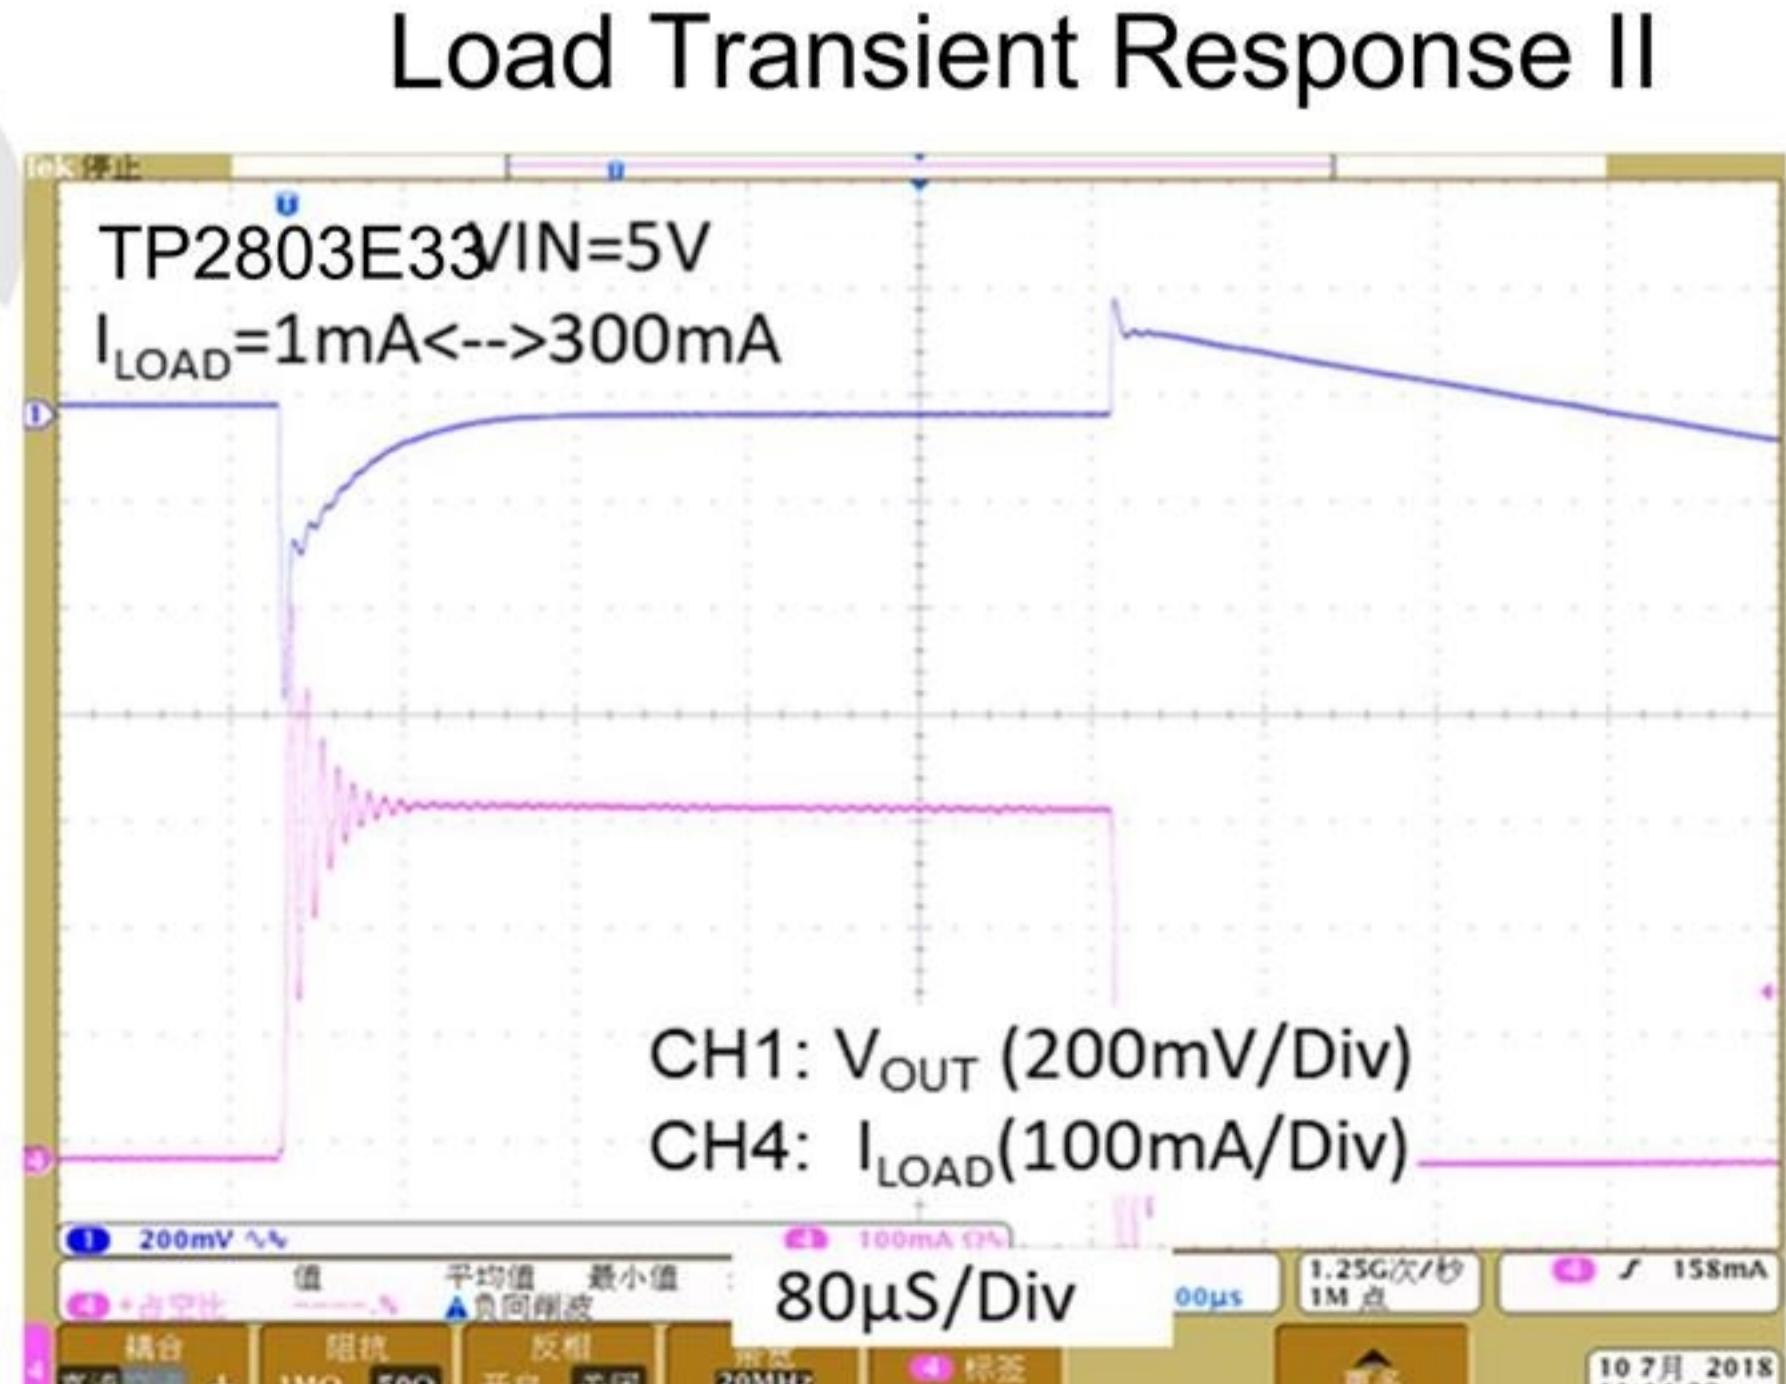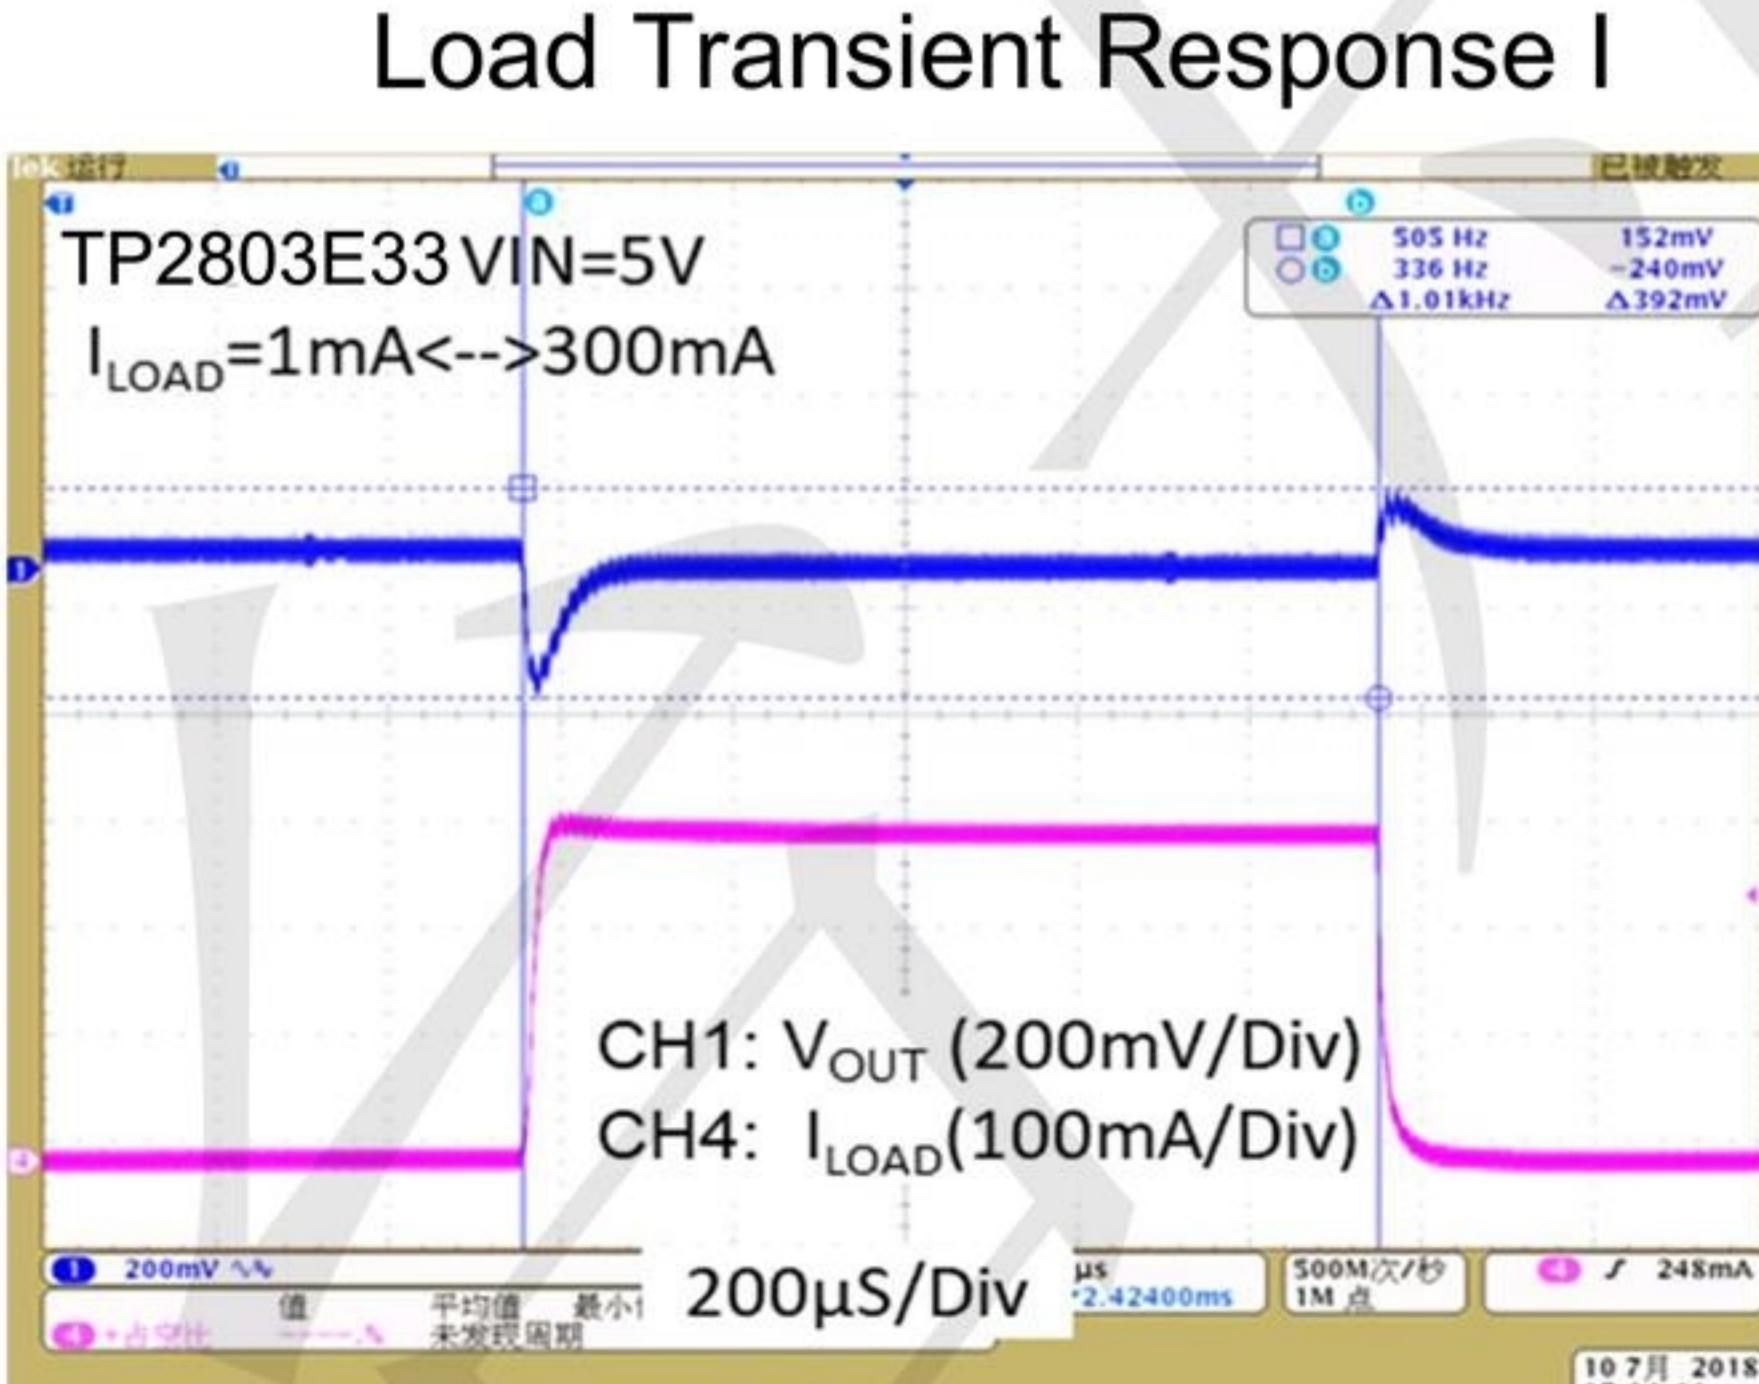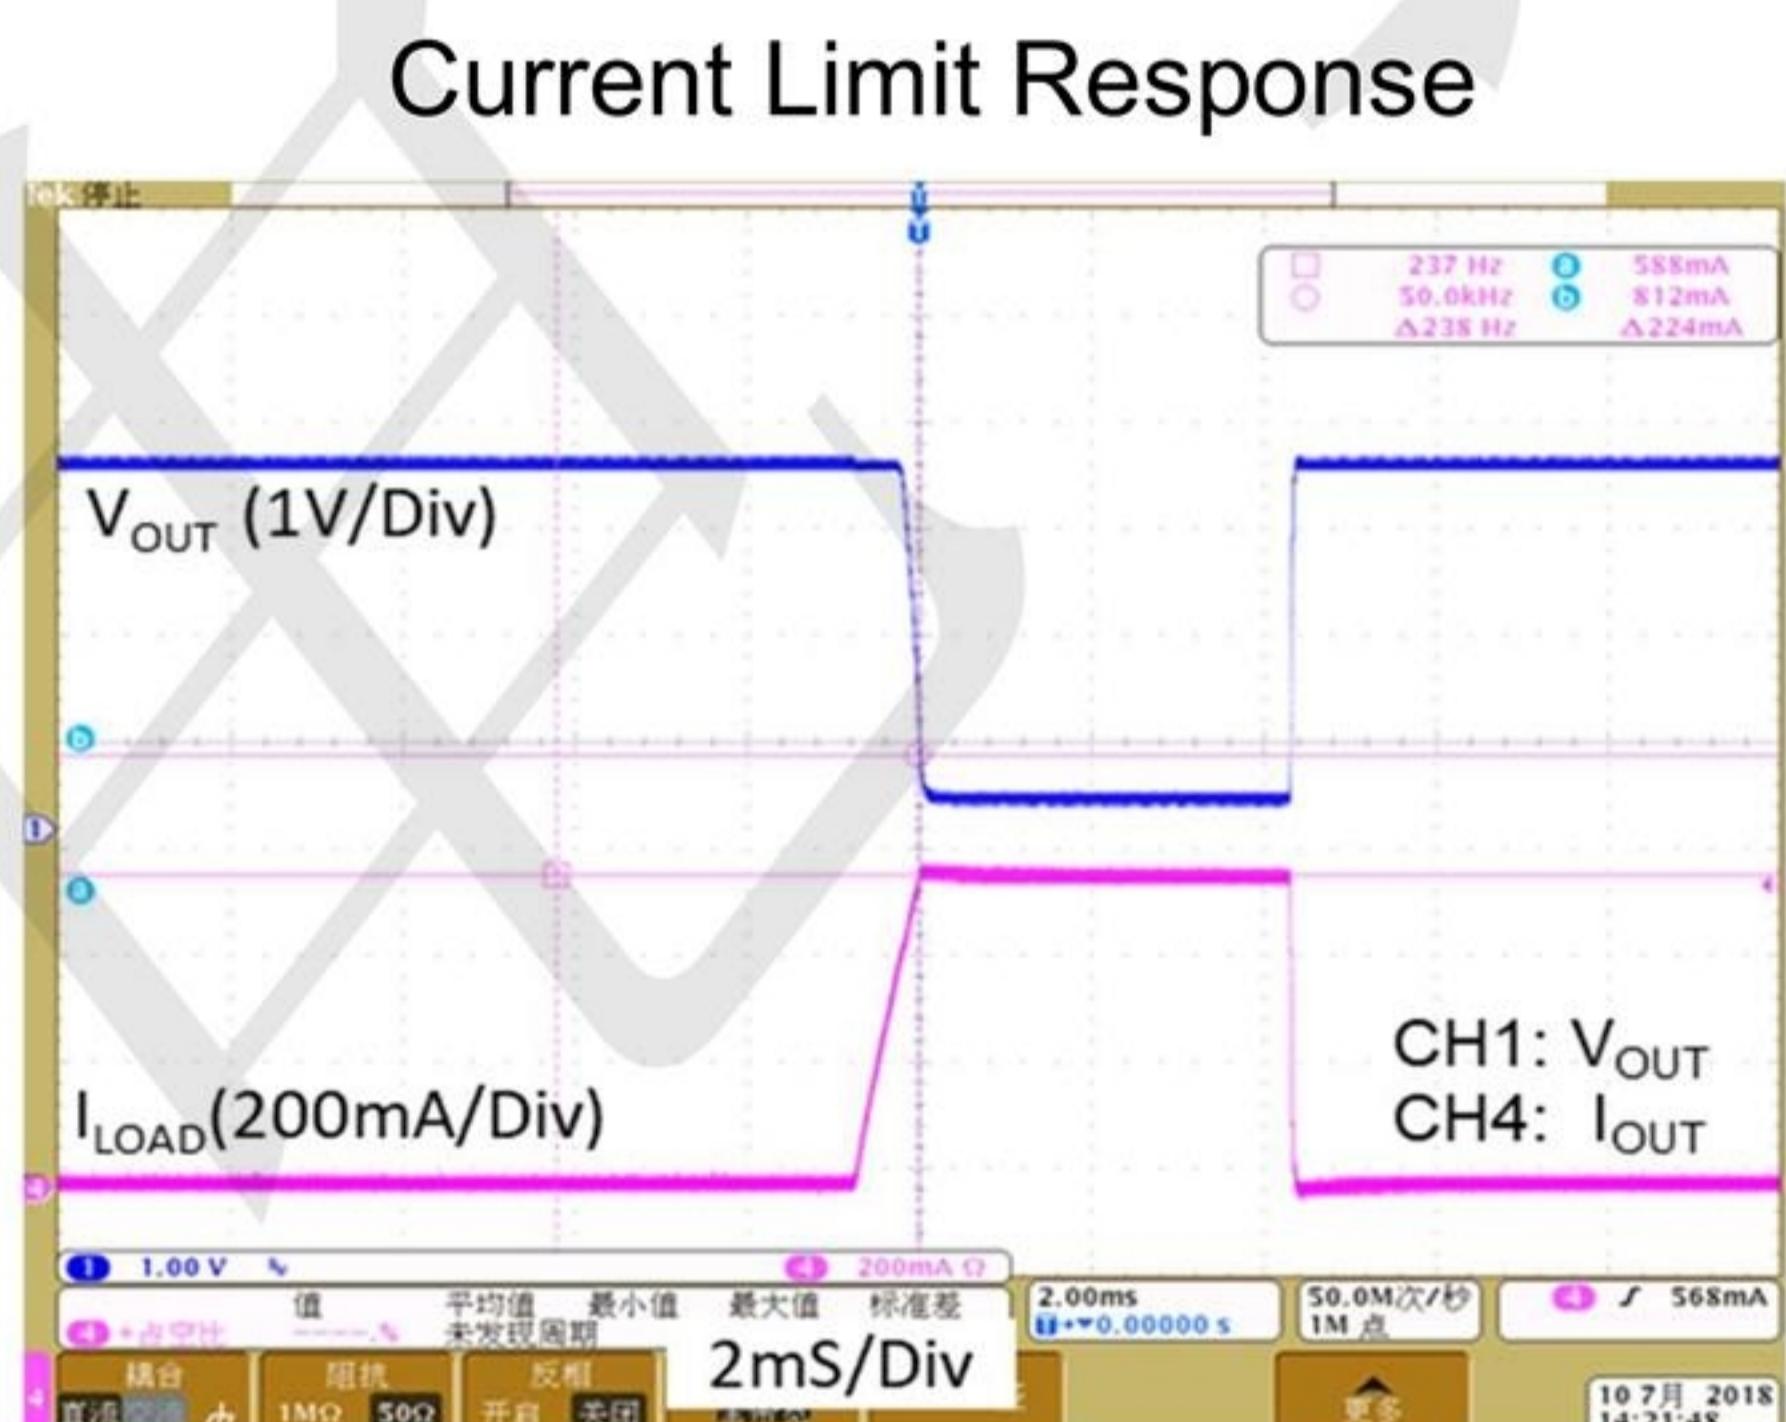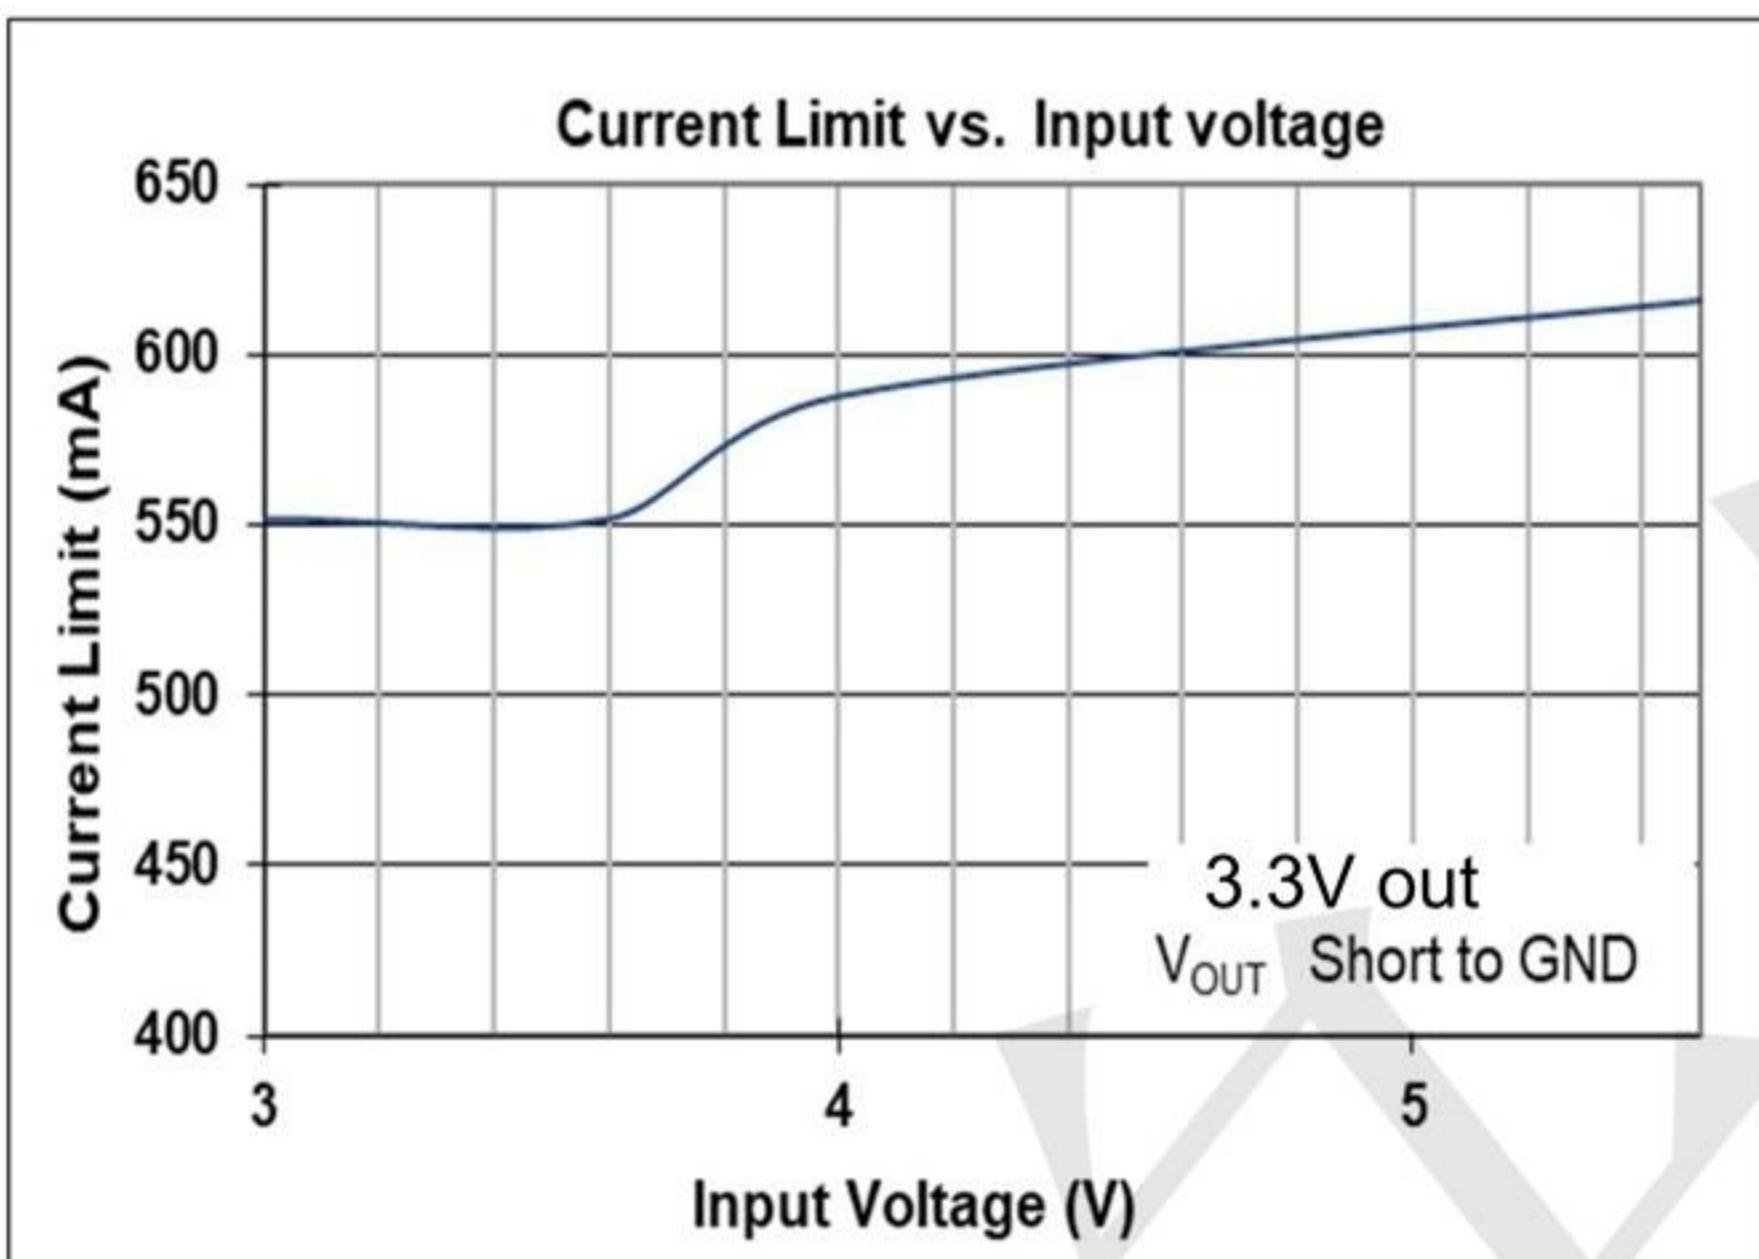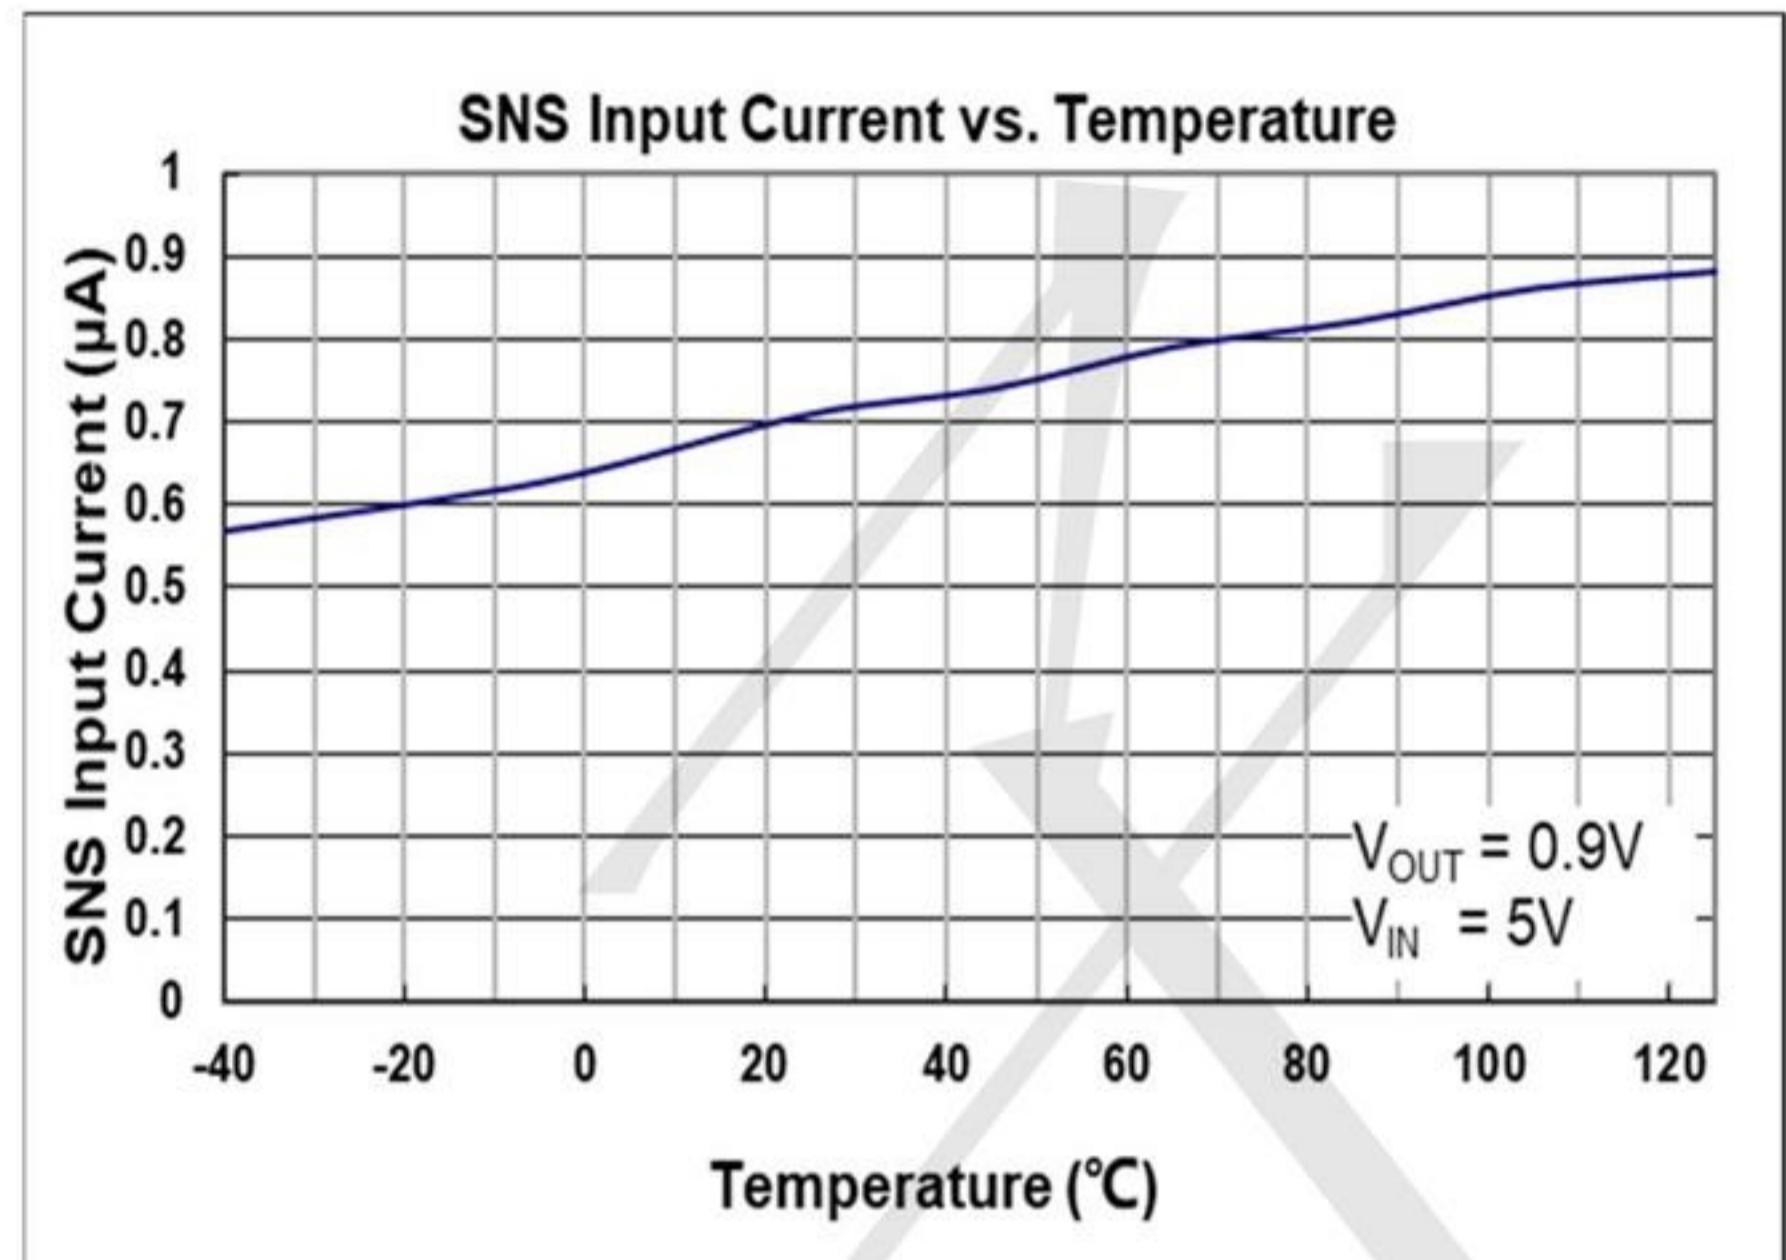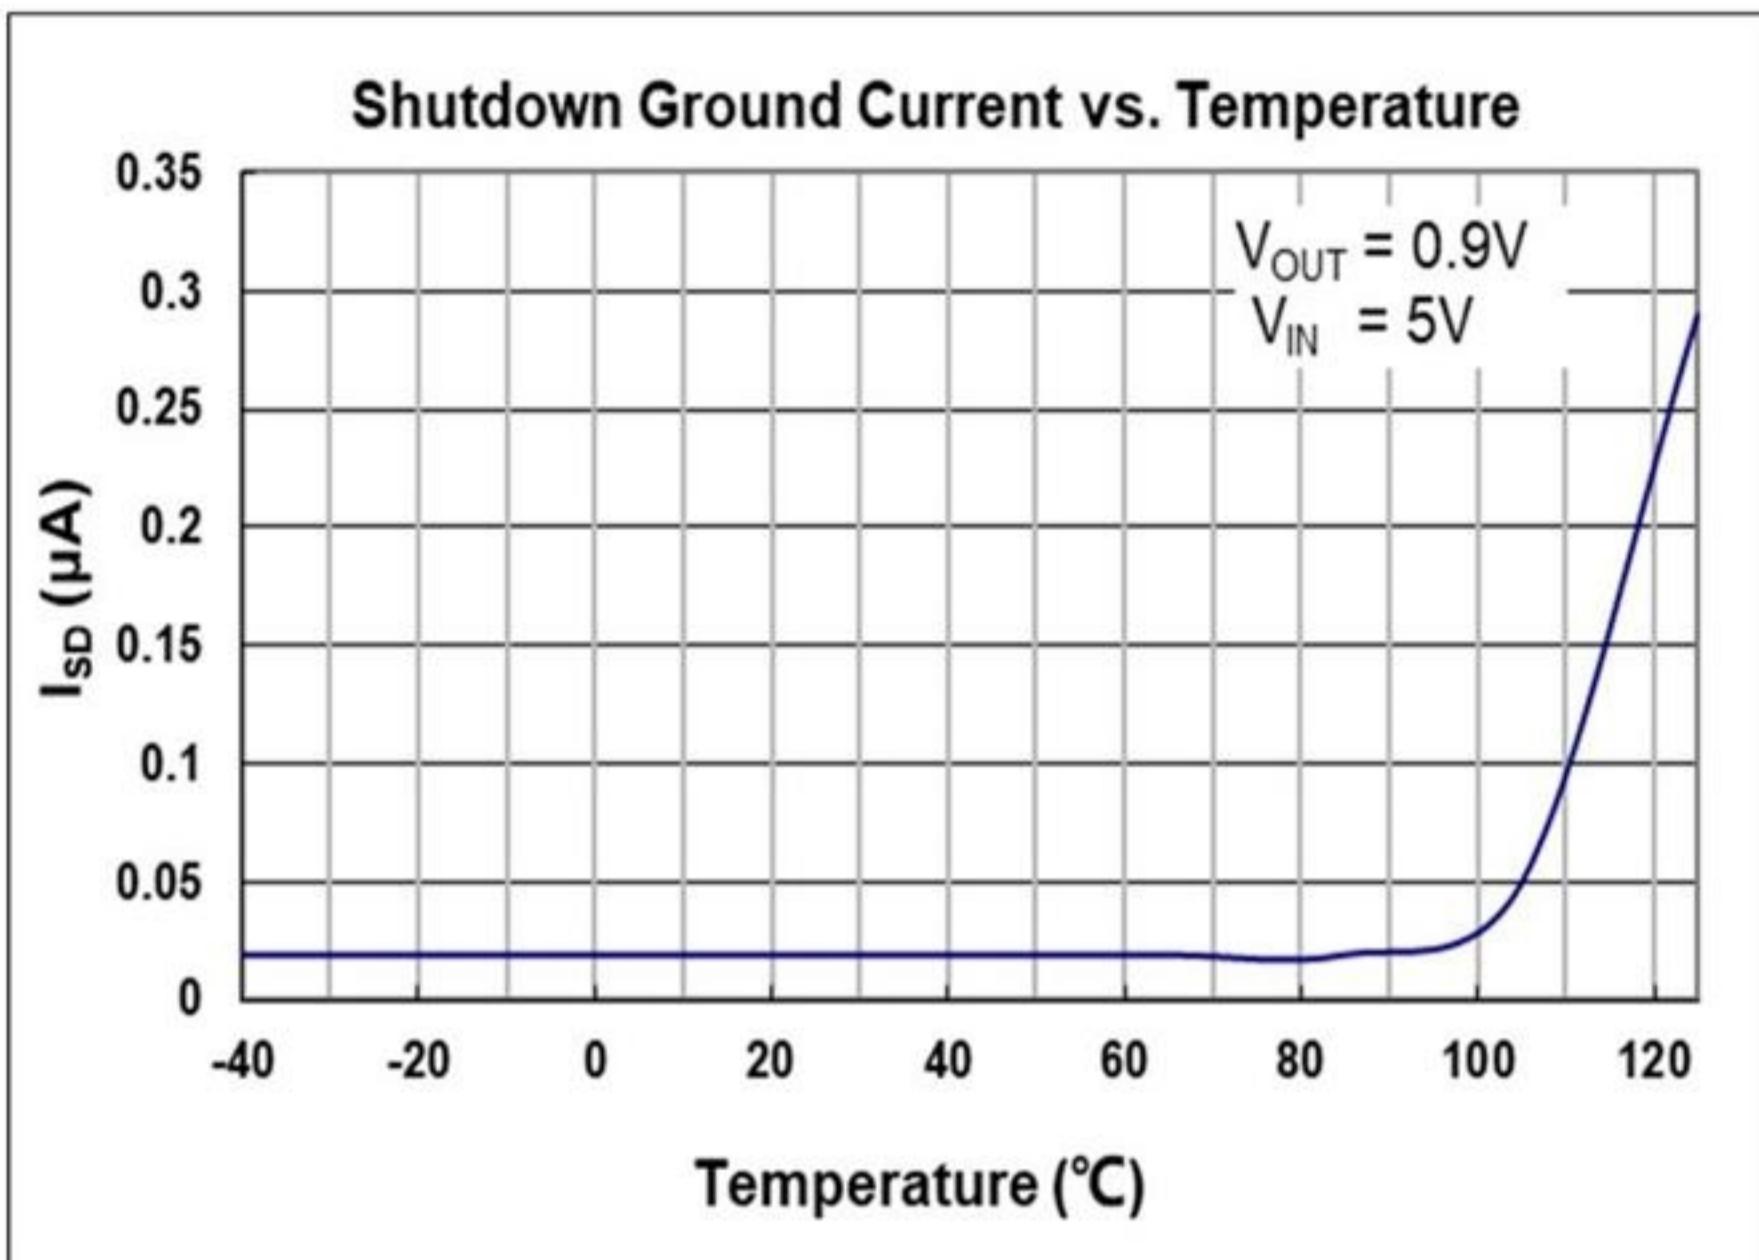



TECH PUBLIC


台舟电子

TP2803E33-5


400mA 2uA Higt PSRR Voltage Reaulators

www.sot23.com.tw

Line Transient Response

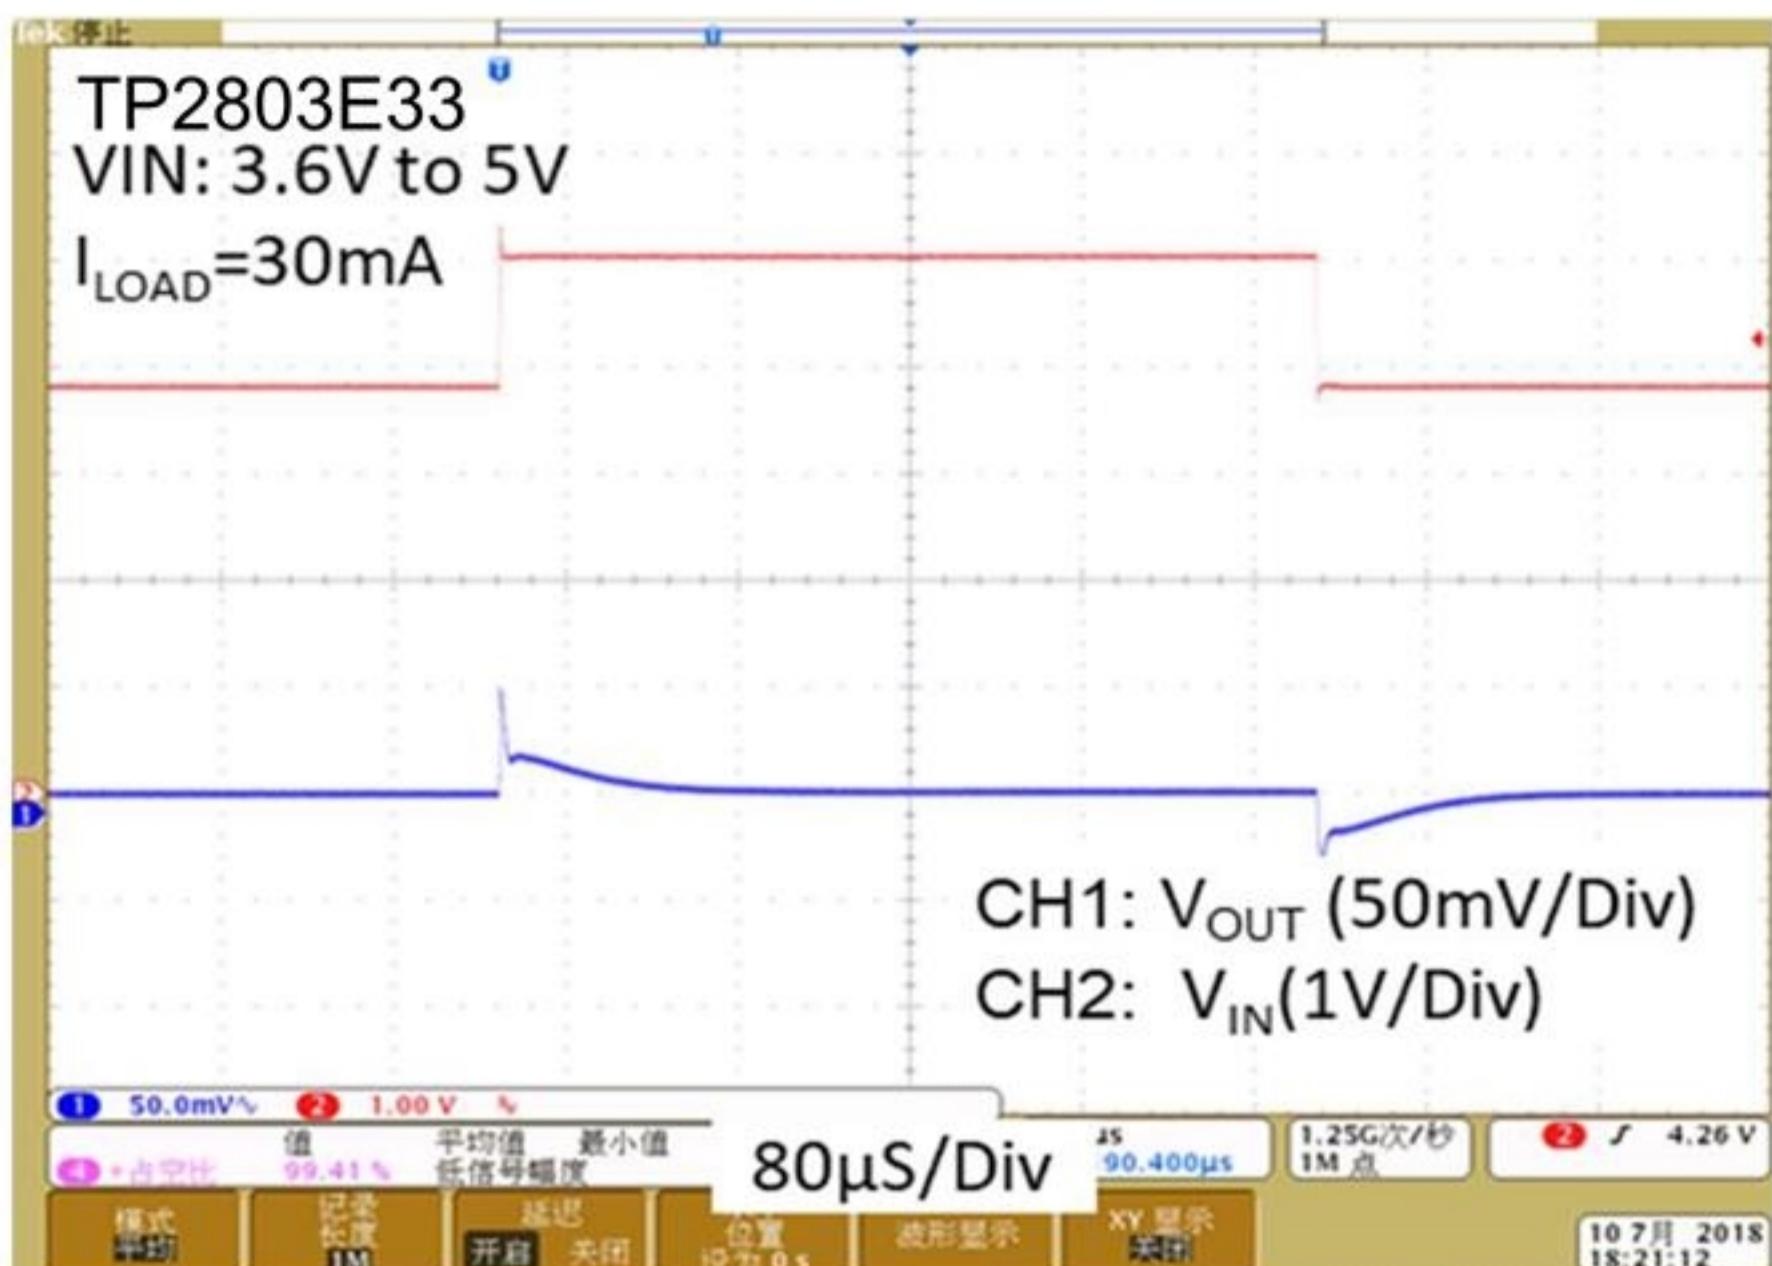


V_{OUT} Turn On/Off by EN

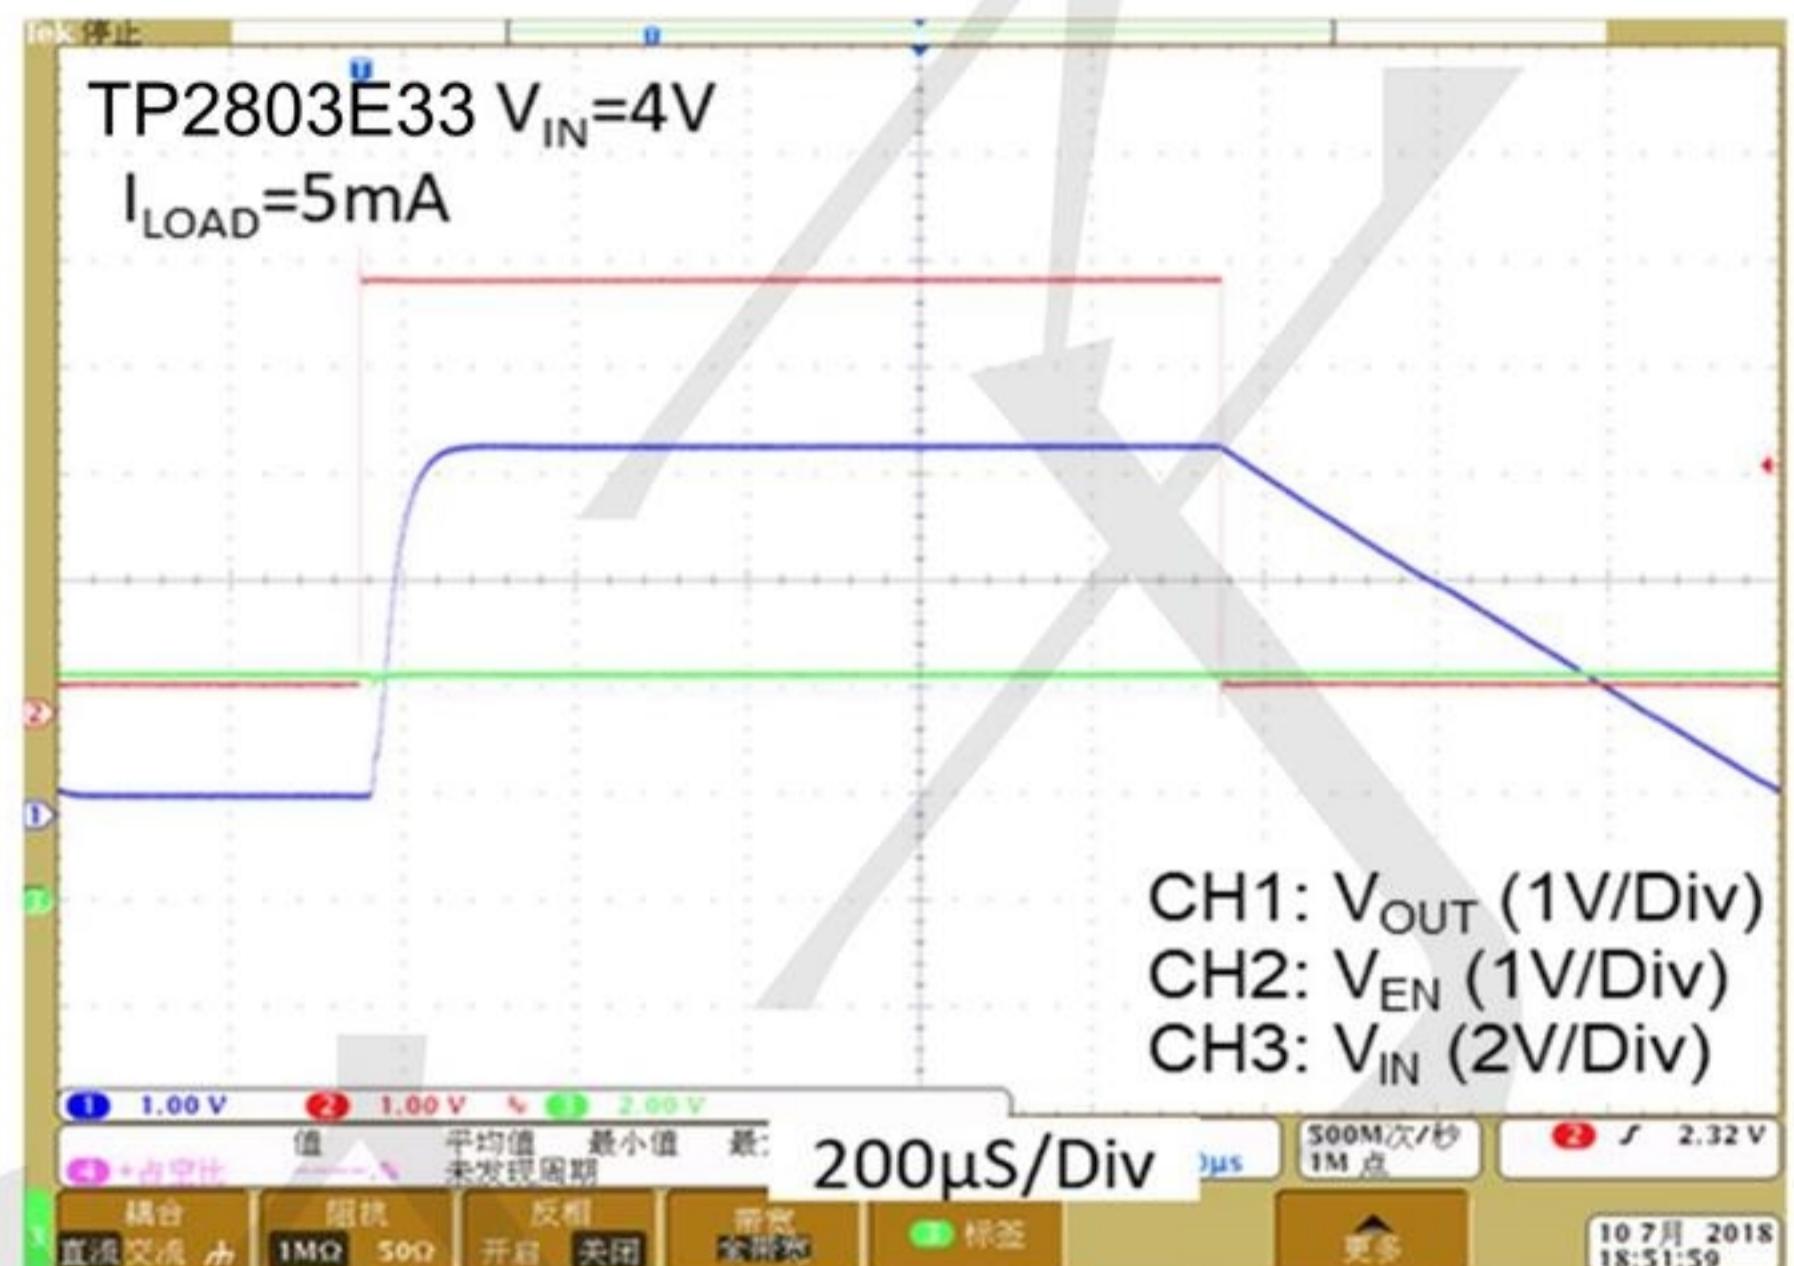



Package information

3-pin SOT23-5 Outline Dimensions

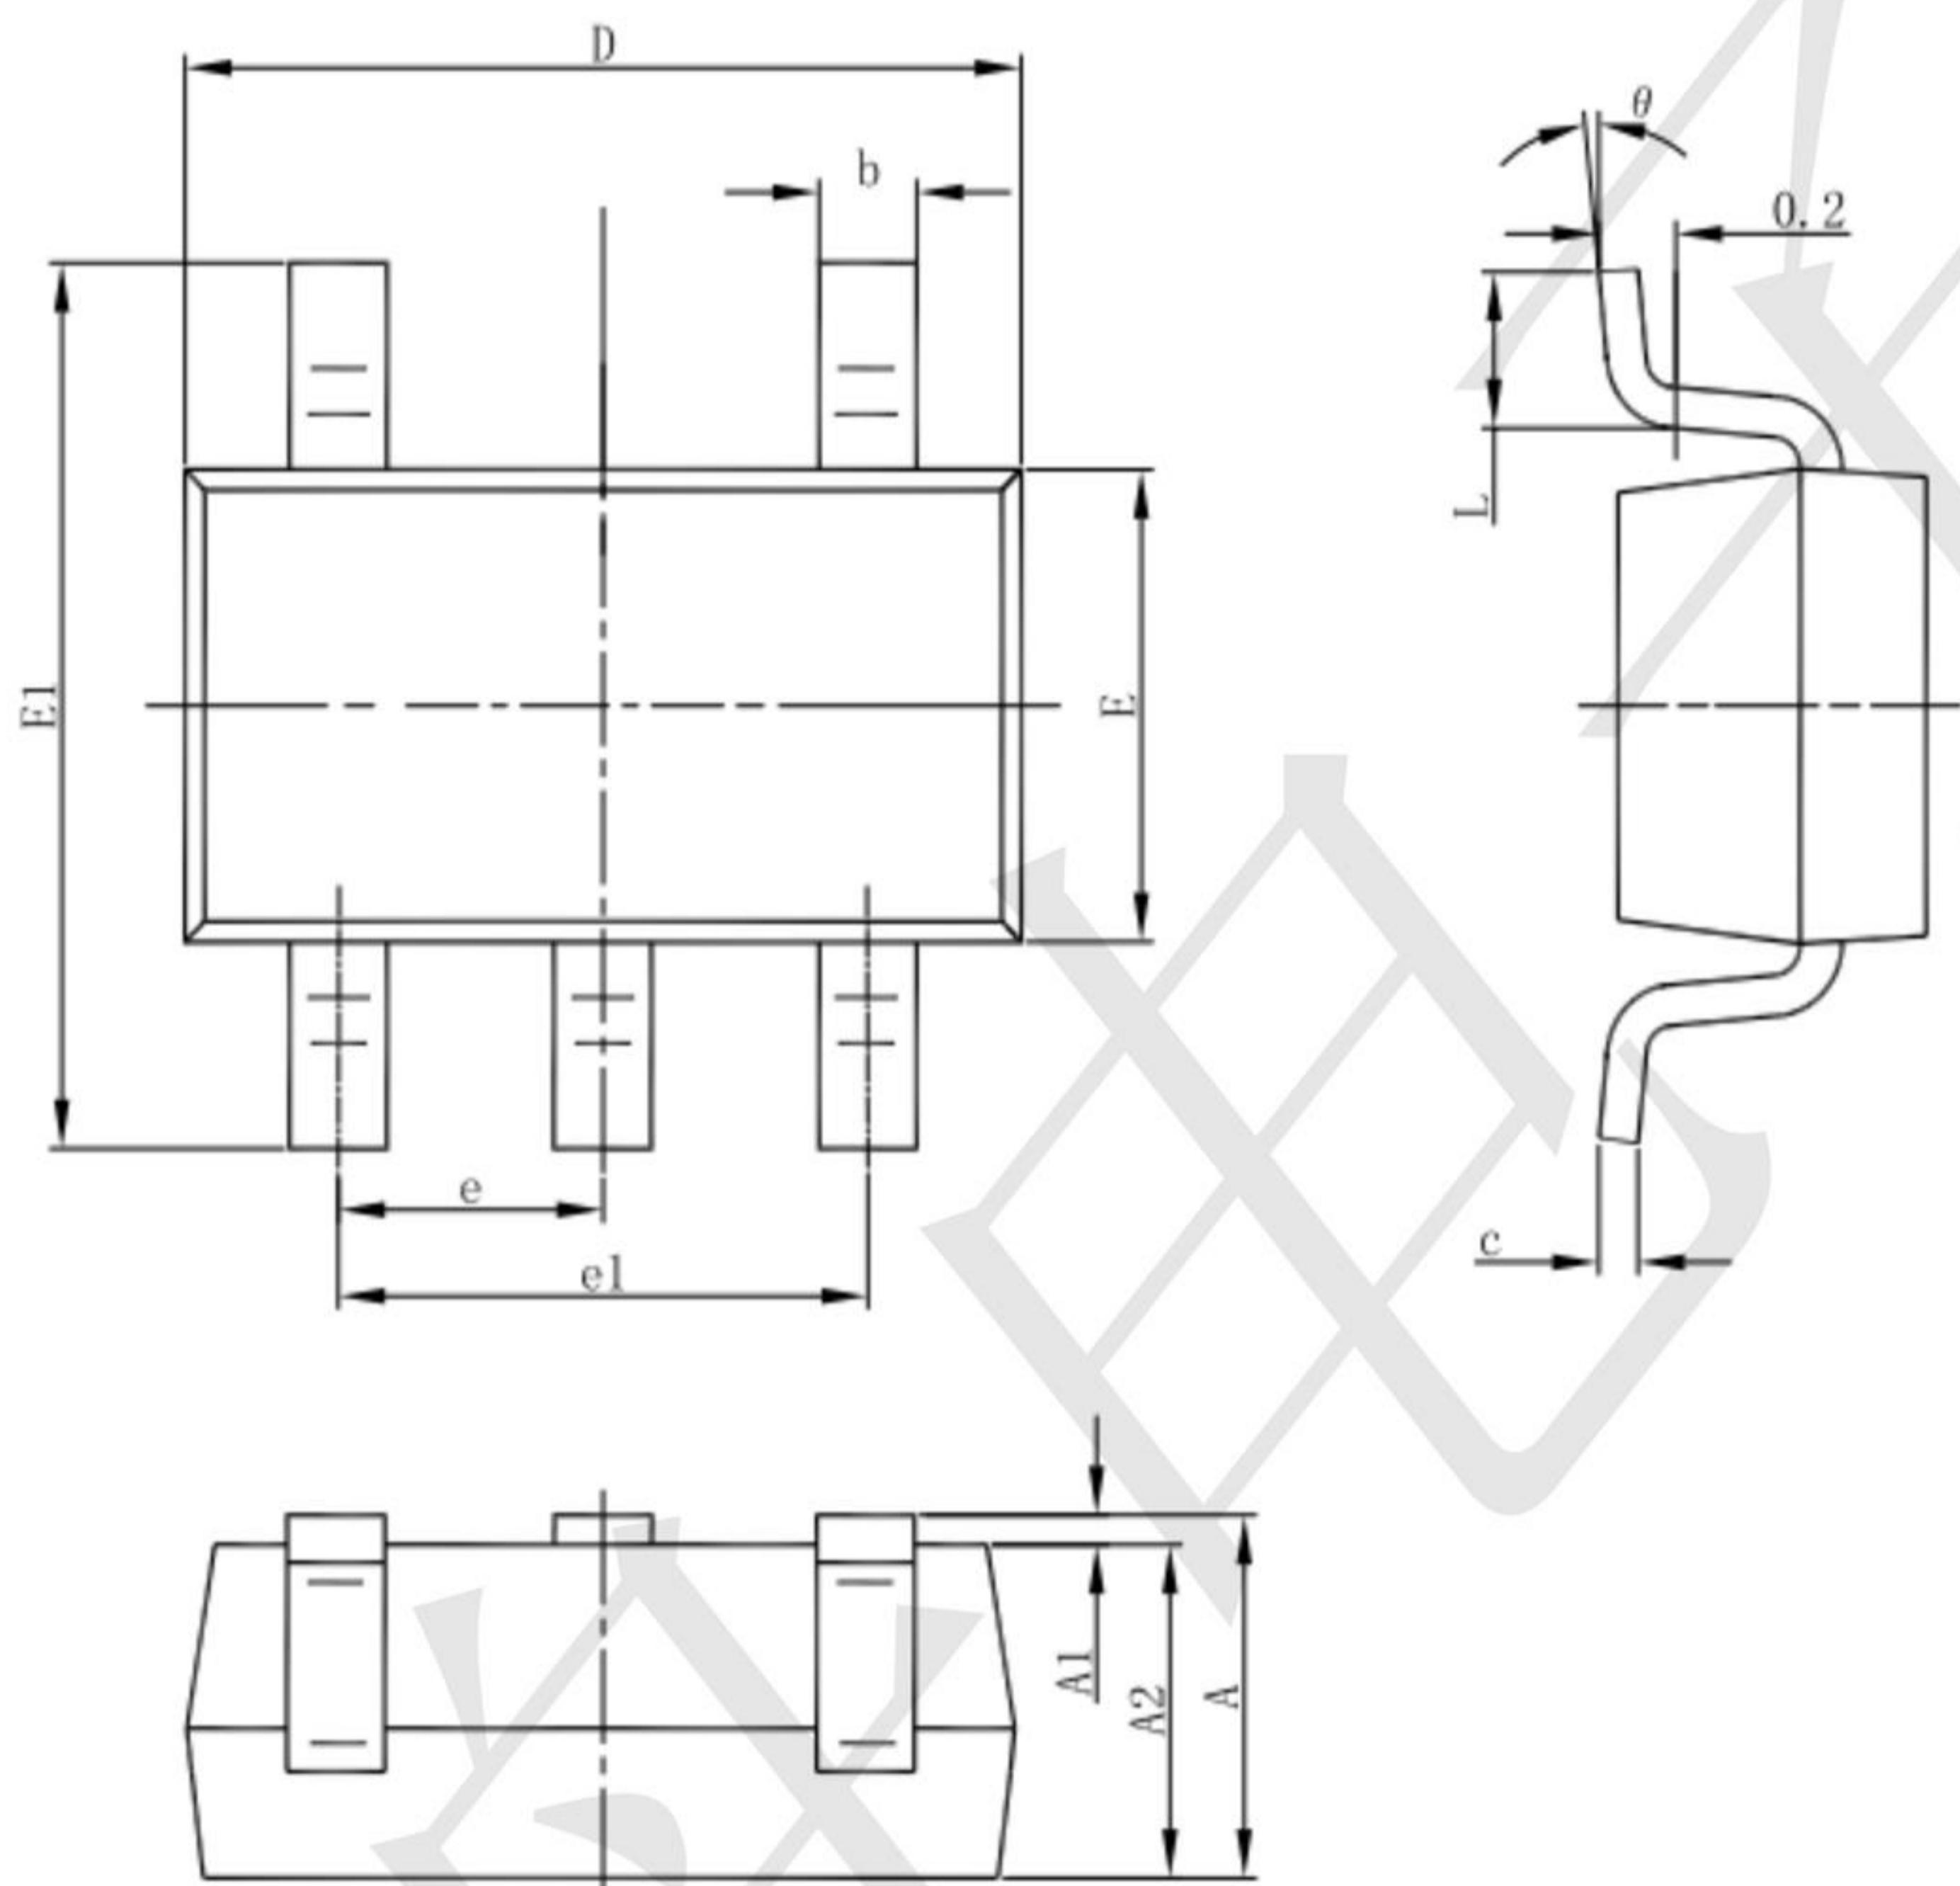

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	1.500	1.700	0.059	0.067
E1	2.650	2.950	0.104	0.116
e	0.950(BSC)		0.037(BSC)	
e1	1.800	2.000	0.071	0.079
L	0.300	0.600	0.012	0.024
θ	0°	8°	0°	8°

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Linear Voltage Regulators](#) category:

Click to view products by [TECH PUBLIC](#) manufacturer:

Other Similar products are found below :

[LV56831P-E](#) [LV5684PVD-XH](#) [MCDTSA6-2R](#) [L7815ACV-DG](#) [PQ3DZ53U](#) [LV56801P-E](#) [TLE42794G](#) [L78L05CZ/1SX](#) [L78LR05DL-MA-E](#) [636416C](#) [714954EB](#) [BA033LBSG2-TR](#) [LV5680P-E](#) [L78M15CV-DG](#) [L79M05T-E](#) [TLS202A1MBVHTSA1](#) [L78LR05D-MA-E](#) [NCV317MBTG](#) [NTE7227](#) [LV5680NPVC-XH](#) [LT1054CN8](#) [MP2018GZD-5-Z](#) [MP2018GZD-33-Z](#) [MIC5281-3.3YMM](#) [MC78L06BP-AP](#) [TA48LS05F\(TE85L,F\)](#) [TA78L12F\(TE12L,F\)](#) [TC47BR5003ECT](#) [TCR2LN12,LF\(S\)](#) [TCR2LN28,LF\(S\)](#) [TCR2LN30,LF\(S\)](#) [TCR3DF295,LM\(CT](#) [TCR3DF40,LM\(CT](#) [BA178M20CP-E2](#) [L78M12ABDT](#) [LM7812SX/NOPB](#) [LR645N3-G-P003](#) [LR645N3-G-P013](#) [ZXTR2005P5-13](#) [SCD7812BTG](#) [TCR3DF335,LM\(CT](#) [ZXTR2012K-13](#) [TLE42994E V33](#) [ZXTR2008K-13](#) [ZXTR2005K-13](#) [L88R05DL-E](#) [ADP3300ARTZ-2.7RL7](#) [LM120K-15/883](#) [IFX54441LDVXUMA1](#) [LM317D2T-TR](#)