

Features

- Input voltage: up to 35V
- Output voltage: 12V
- Output current up to 500 mA, internal thermal overload protection and short-circuit current limiting.


Application

- Voltage Regulator.

Package and Pin Configuration




Marking:



"78M09" is part number, fixed

"xx" is internal code

Standard Application Circuit

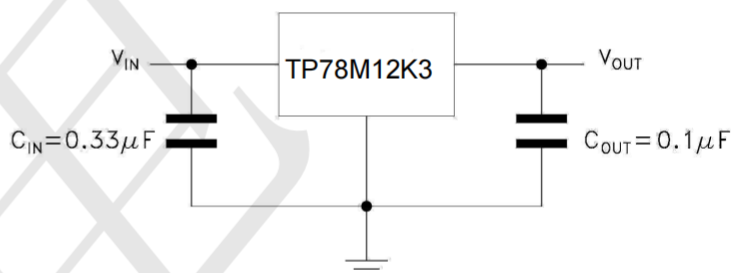

Absolute Maximum Ratings

Ratings at 25°C ambient temperature unless otherwise specified.







Parameter	Symbol	Value	Unit
Input Voltage	V_I	35	V
Thermal Resistance, Junction-to-Air	$R_{\theta JA}$	100	°C/W
Operating Temperature Range	T_{OPR}	-40 to +125	°C
Storage Temperature Range	T_{STG}	-65 to +150	°C

Electrical Characteristics


Ratings at $T_J = 25^\circ\text{C}$, $V_I = 10\text{V}$, $I_O = 40\text{mA}$, $C_i = 0.33\mu\text{F}$, $C_o = 0.1\mu\text{F}$, unless otherwise specified.

Parameter	Symbols	Test Conditions	Min	Typ	Max	Unit
Output Voltage	V_O	$T_J = 25^\circ\text{C}$	11.5	12	12.5	V
		$5\text{mA} \leq I_O \leq 350\text{mA}$ $V_I = 14.5\text{V to } 27\text{V}$	11.4	12	12.6	
Line Regulation	ΔV_O	$V_O = 14.5\text{ V to } 30\text{ V}$			100	mV
		$V_I = 16\text{ V to } 30\text{ V}$			50	mV
Load Regulation	ΔV_O	$I_O = 5\text{ mA to } 500\text{ mA}$			240	mV
		$I_O = 5\text{ mA to } 200\text{ mA}$			120	mV
Ripple Rejection	RR	$V_I = 15\sim 25\text{ V}$, $f = 120\text{Hz}$	55	80		dB
Output Noise Voltage	V_N	$f = 10\text{Hz} \sim 100\text{Hz}$, $T_J = 25^\circ\text{C}$		75		μV
Dropout Voltage	V_D	$I_O = 1\text{A}$		2		V
Quiescent Current	I_Q	$T_J = 25^\circ\text{C}$			6	mA
Quiescent Current Change	ΔI_Q	$I_O = 5\text{ mA to } 350\text{ mA}$, $T_J = 25^\circ\text{C}$			0.5	mA
		$V_I = 14.5\text{ V to } 30\text{ V}$, $T_J = 25^\circ\text{C}$			0.8	

Typical Characteristics

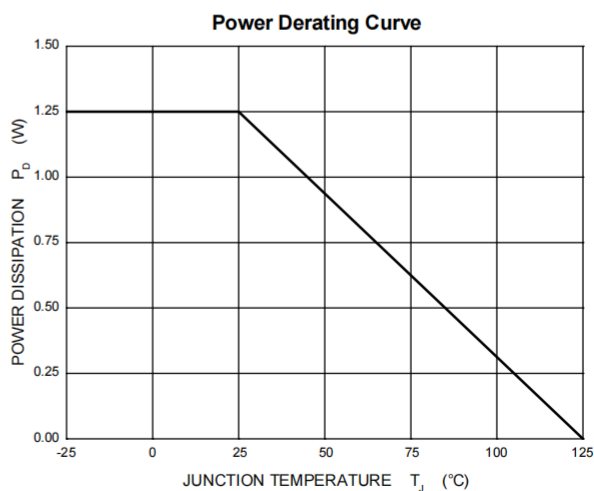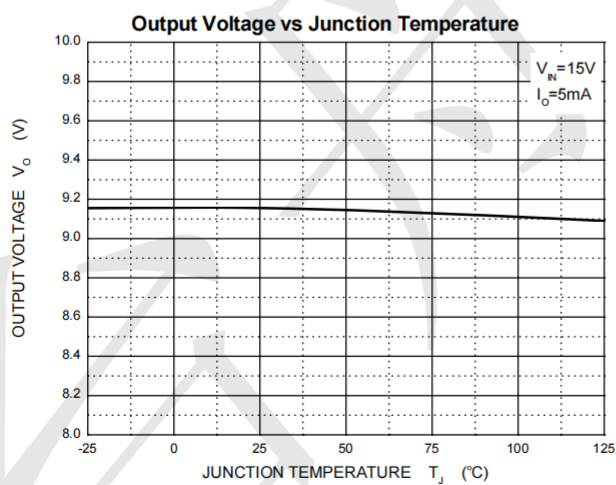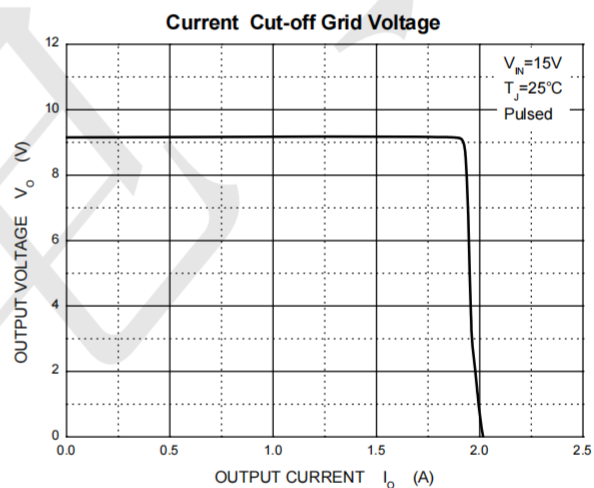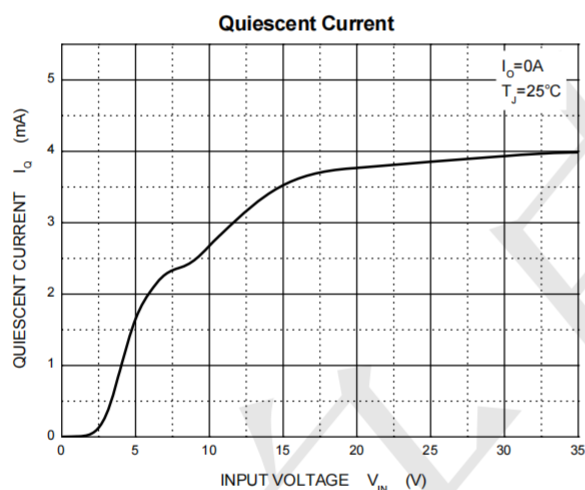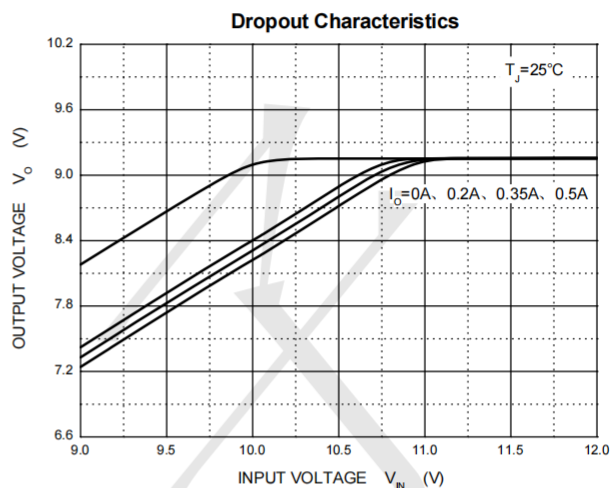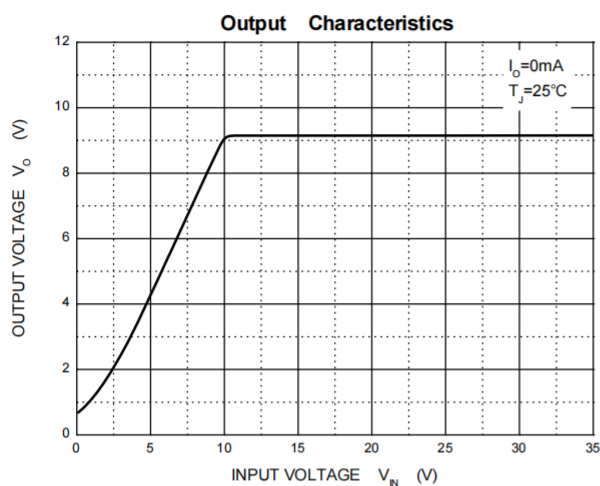

TO252 Package Information

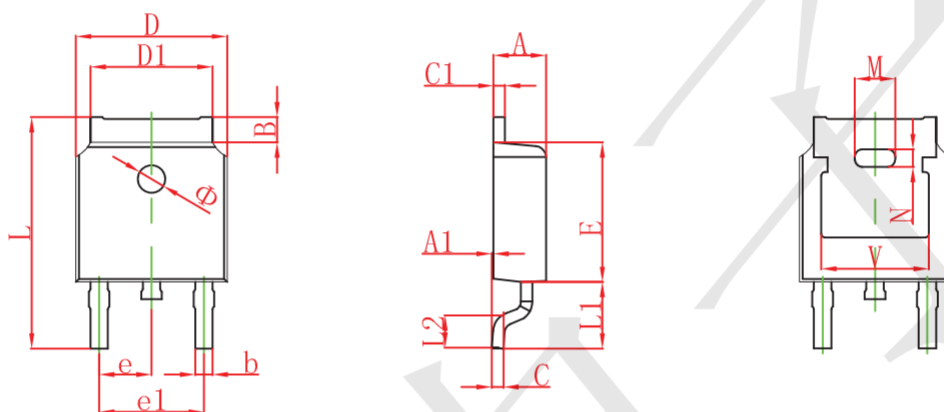

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	2.200	2.380	0.087	0.094
A1	0.000	0.100	0.000	0.004
B	0.800	1.400	0.031	0.055
b	0.710	0.810	0.028	0.032
c	0.460	0.560	0.018	0.022
c1	0.460	0.560	0.018	0.022
D	6.500	6.700	0.256	0.264
D1	5.130	5.460	0.202	0.215
E	6.000	6.200	0.236	0.244
e	2.286 TYP.		0.090 TYP.	
e1	4.327	4.727	0.170	0.186
M	1.778REF.		0.070REF.	
N	0.762REF.		0.018REF.	
L	9.800	10.400	0.386	0.409
L1	2.9REF.		0.114REF.	
L2	1.400	1.700	0.055	0.067
V	4.830 REF.		0.190 REF.	
Φ	1.100	1.300	0.043	0.051

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [LDO Voltage Regulators](#) category:

Click to view products by [TECH PUBLIC](#) manufacturer:

Other Similar products are found below :

[AP7363-SP-13](#) [NCV8664CST33T3G](#) [L79M05TL-E](#) [L9454](#) [AP7362-HA-7](#) [PT7M8202B12TA5EX](#) [TCR3DF185,LM\(CT](#) [TLF4949EJ](#) [L9708](#)
[L970813TR](#) [NCP4687DH15T1G](#) [NCV8703MX30TCG](#) [NCV4269CPD50R2G](#) [AP7315-25W5-7](#) [AP2111H-1.2TRG1](#) [ZLDO1117QK50TC](#)
[AZ1117ID-ADJTRG1](#) [NCP114BMX075TCG](#) [MC33269T-3.5G](#) [TLE4471GXT](#) [AP7315-33SA-7](#) [NCV4266-2CST33T3G](#) [NCP715SQ15T2G](#)
[NCV8623MN-50R2G](#) [NCV563SQ18T1G](#) [NCV8664CDT33RKG](#) [NCV4299CD250R2G](#) [NCP715MX30TBG](#) [NCV8702MX25TCG](#)
[L974113TR](#) [TLE7270-2E](#) [NCV562SQ25T1G](#) [NCP715MX53TBG](#) [AP2202K-2.6TRE1](#) [NCV8170BMX300TCG](#) [NCV8152MX300180TCG](#)
[NCP700CMT45TBG](#) [AP7315-33W5-7](#) [LD56100DPU18R](#) [LD56100DPU28R](#) [NCP154MX180300TAG](#) [AP2113AMTR-G1](#) [MP2013AGG-5-P](#)
[NCV8775CDT50RKG](#) [NJM2878F3-45-TE1](#) [S-1313D18-N4T1U4](#) [AP7343D-31FS4-7B](#) [AP7315-30W5-7](#) [AZ1117ID-1.2TRG1](#)
[XC6215B3027R-G](#)