

# XC6228 Series

## 300mA High Speed LDO Regulator

[WWW.TECHPUBLIC.COM](http://WWW.TECHPUBLIC.COM)


### Features

- 100 $\mu$ A Current at no Load
- $\pm 2\%$  Output Accuracy
- 300mA Output Current
- Current Limit Protection

### Applications

- Industrial Controls
- Home Automation
- Modules (Wireless, Camera, etc.)
- Portable, Battery Powered Equipment


### PIN CONFIGURATION

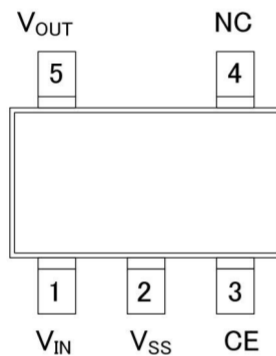

| Pin Number | Pin Name | Pin Function            |
|------------|----------|-------------------------|
| SOT23-5    |          |                         |
| 1          | VIN      | Input of Supply Voltage |
| 2          | VSS      | Ground                  |
| 3          | CE       | ON/OFF Control          |
| 4          | NC       | No Internal Connection  |
| 5          | VOUT     | Output of the Regulator |

### Ordering Information

XC6228DXX2VR-G

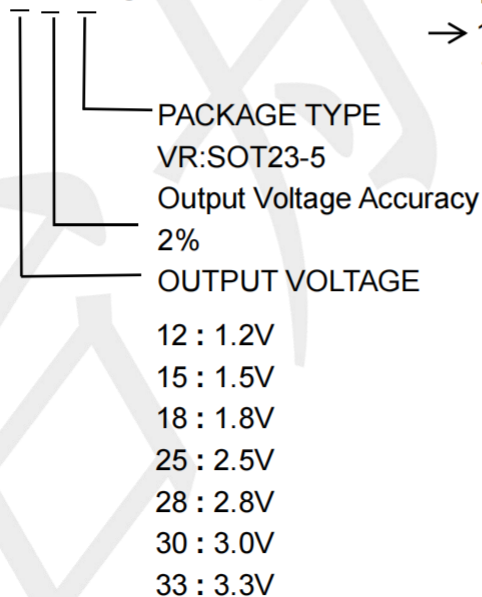

Example: XC6228D152VR-G  
→ 1.5V Version, in SOT23-5 Package & Tape & Reel Packing Type

# XC6228 Series

## 300mA High Speed LDO Regulator


WWW.TECHPUBLIC.COM

### Absolute Maximum Ratings


over operating free-air temperature range (unless otherwise noted)

|             |                                   | MIN                | MAX  | UNIT |
|-------------|-----------------------------------|--------------------|------|------|
| VIN         | Continuous input voltage range    | -0.3               | 6.0  | V    |
| VOUT        | Output voltage range              | -0.3               | 6.0  |      |
| EN          | EN pin voltage range              | -0.3               | 6.0  |      |
| IOUT        | Output pin current                | Internally limited |      | mA   |
| Temperature | Operating Temperature Range ,Topr | -40                | +85  | °C   |
|             | Storage, Tstg                     | -40                | +125 |      |

### BLOCK DIAGRAM

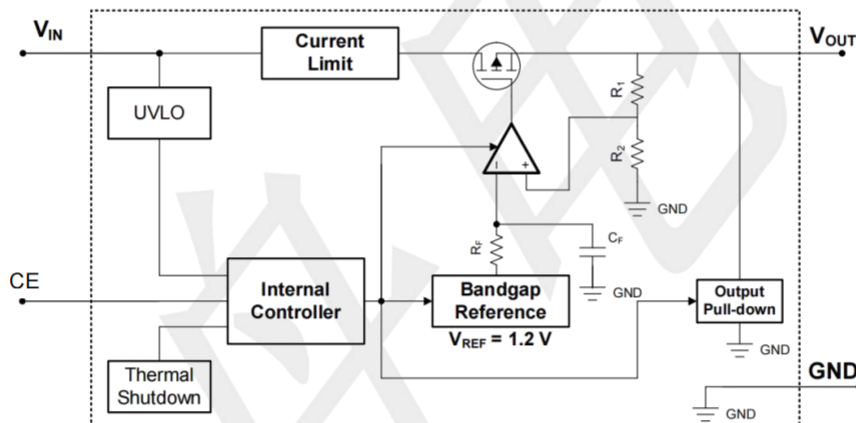

### Typical Application Circuit

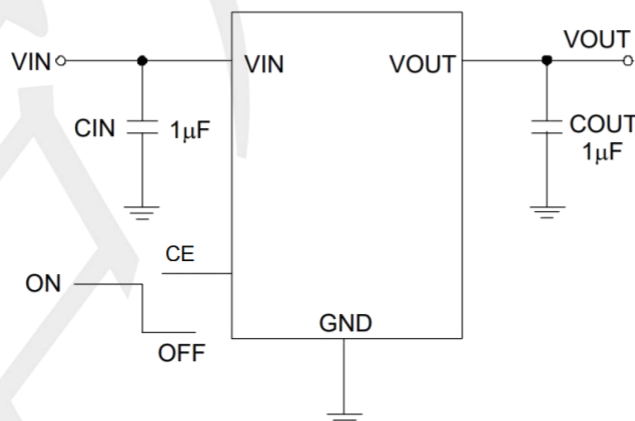

# XC6228 Series

## 300mA High Speed LDO Regulator

[WWW.TECHPUBLIC.COM](http://WWW.TECHPUBLIC.COM)

### Electrical Characteristics

(VIN=15V, VEN=5V, TA=25°C, unless otherwise specified)

| PARAMETER                                  | SYMBOL                                 | TEST Conditions                                         | MIN | TYP  | MAX | UNIT |
|--------------------------------------------|----------------------------------------|---------------------------------------------------------|-----|------|-----|------|
| Supply Voltage                             | VIN                                    |                                                         | 1.7 | --   | 5.5 | V    |
| Output current                             | IOUT                                   |                                                         | 300 | --   | --  | mA   |
| DC Output Voltage Accuracy                 |                                        | IOUT = 1mA                                              | -2  | --   | 2   | %    |
| Dropout Voltage (VIN-VOUT)                 | IOUT = 300mA                           | VOUT = 1.2V                                             | --  | 480  | --  | mV   |
|                                            |                                        | VOUT = 1.5V                                             | --  | 420  | --  |      |
|                                            |                                        | VOUT = 1.8V                                             | --  | 300  | --  |      |
|                                            |                                        | VOUT = 2.5V                                             | --  | 240  | --  |      |
|                                            |                                        | VOUT = 2.8V                                             | --  | 230  | --  |      |
|                                            |                                        | VOUT = 3.0V                                             | --  | 220  | --  |      |
|                                            |                                        | VOUT = 3.3V                                             | --  | 200  | --  |      |
| Ground Current (IOUT = 0mA)                | IQ                                     | VOUT = 3.3V                                             | --  | --   | 100 | uA   |
| Shutdown Ground Current                    | ISD                                    | VEN = 0V,                                               | --  | 0.01 | 1   |      |
| VOUT Shutdown Leakage Current              | ILEAK                                  | VOUT = 0V                                               | --  | 0.01 | 1   |      |
| Enable Threshold Voltage                   | VIH                                    | CE Rising                                               | 1.2 | --   | --  | V    |
|                                            | VIL                                    | CE Falling                                              | --  | --   | 0.3 |      |
| CE Input Current                           | ICE                                    | VCE = 5V                                                | --  | 10   | 100 | nA   |
| Line Regulation                            | ΔLINE                                  | IOUT = 1mA,<br>2 ≤ VIN ≤ 6V                             | --  | 0.3  | --  | %    |
| Load Regulation                            | ΔLOAD                                  | 10mA ≤ IOUT ≤<br>100mA                                  | --  | 0.3  | --  |      |
| Output Current Limit                       | ILIM                                   | VOUT = 0.9 ×<br>VOUT(NOM)                               | 350 | --   | --  | mA   |
| Power Supply Rejection Ratio               | PSRR                                   | VOUT = 3.3V,<br>IOUT = 40mA,<br>VIN = 5.5V,<br>f = 1kHz | --  | 70   | --  | dB   |
| Package Thermal Resistance θJA<br>(Note 1) | Thermal Resistance Junction-to-Ambient |                                                         | --  | 210  | --  | °C/W |
| Total Power Dissipation TC=25°C            | PDTOT                                  |                                                         | --  | 0.2  | --  | W    |

Note: Test condition: For SOT23-5, the device is mounted on FR-4 substrate PC board, with minimum recommended pad layout.







# XC6228 Series

## 300mA High Speed LDO Regulator

[WWW.TECHPUBLIC.COM](http://WWW.TECHPUBLIC.COM)

### Typical Operating Characteristics (25 °C, unless otherwise noted)

Unless otherwise specified:  $T_A = 25^\circ\text{C}$ ,  $V_{IN} = V_{O(NOM)} + 1\text{ V}$ ,  $C_{OUT} = 1\ \mu\text{F}$ ,  $C_{IN} = 1\ \mu\text{F}$  all voltage options, EN pin tied to  $V_{IN}$ .

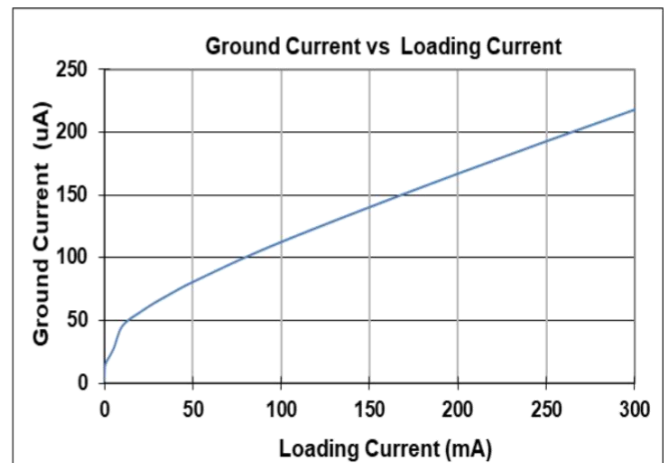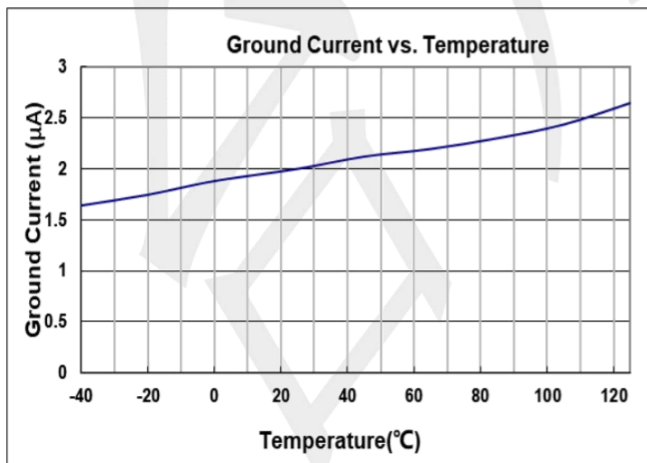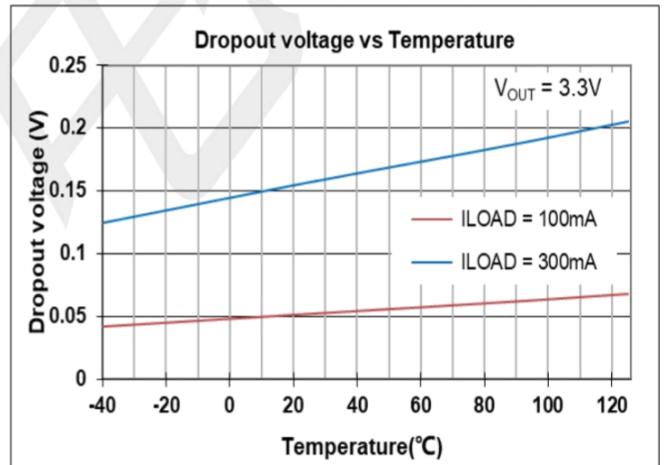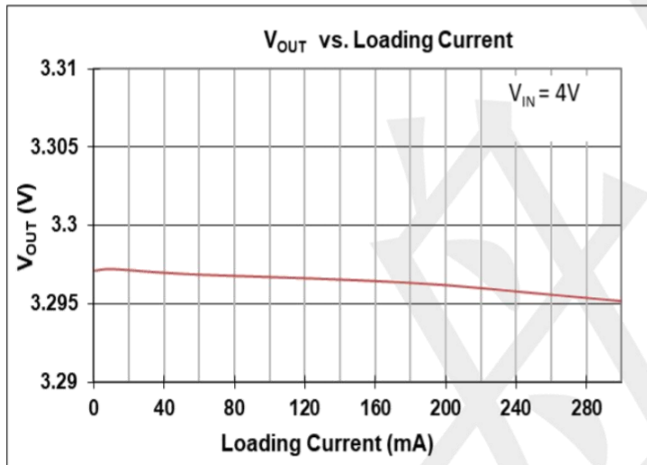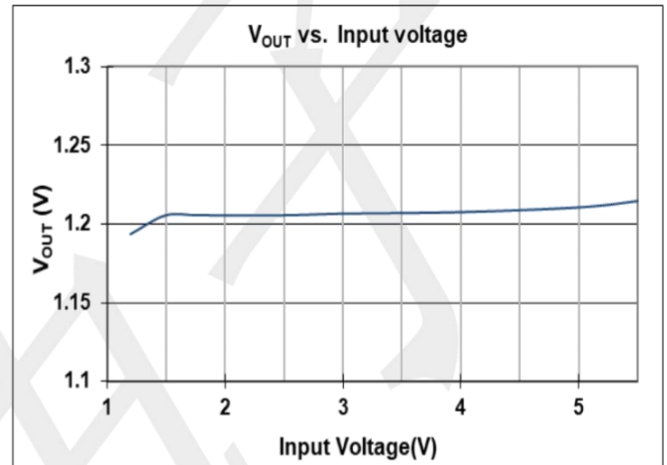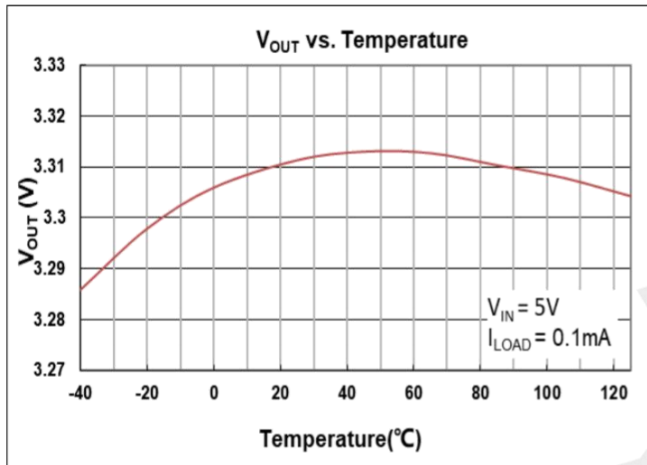


# XC6228 Series

## 300mA High Speed LDO Regulator


[WWW.TECHPUBLIC.COM](http://WWW.TECHPUBLIC.COM)

### Package Outline Dimensions (unit: mm)

#### SOT23-5

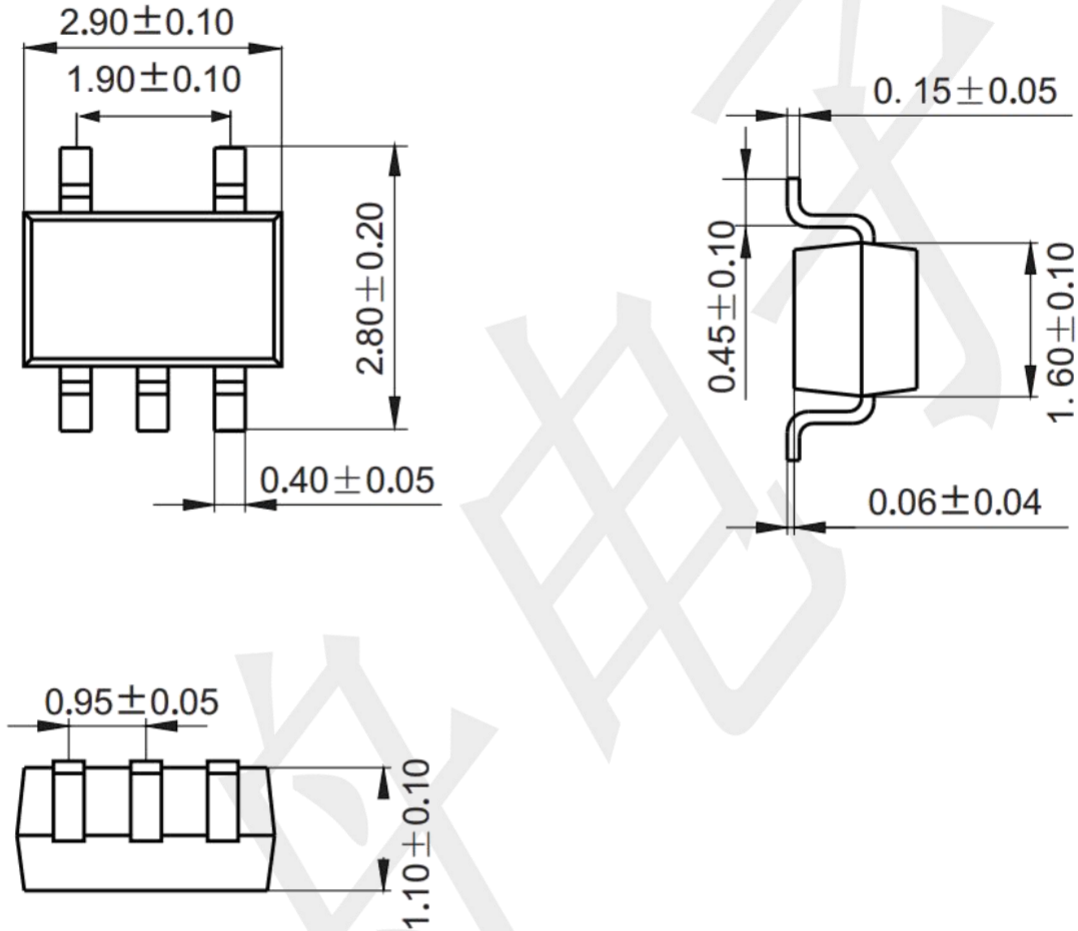

### Mounting Pad Layout (unit: mm)

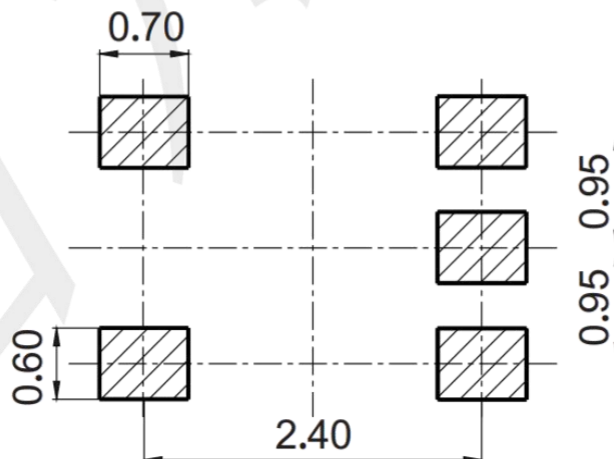

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for [LDO Voltage Regulators](#) category:***

***Click to view products by [TECH PUBLIC](#) manufacturer:***

Other Similar products are found below :

[AP7363-SP-13](#) [NCV8664CST33T3G](#) [L79M05TL-E](#) [L9454](#) [AP7362-HA-7](#) [PT7M8202B12TA5EX](#) [TCR3DF185,LM\(CT](#) [TLF4949EJ](#) [L9708](#)  
[L970813TR](#) [NCP4687DH15T1G](#) [NCV8703MX30TCG](#) [NCV4269CPD50R2G](#) [AP7315-25W5-7](#) [AP2111H-1.2TRG1](#) [ZLDO1117QK50TC](#)  
[NCP114BMX075TCG](#) [MC33269T-3.5G](#) [TLE4471GXT](#) [NCV4266-2CST33T3G](#) [NCP715SQ15T2G](#) [NCV8623MN-50R2G](#)  
[NCV563SQ18T1G](#) [NCV8664CDT33RKG](#) [NCV4299CD250R2G](#) [NCP715MX30TBG](#) [NCV8702MX25TCG](#) [L974113TR](#) [TLE7270-2E](#)  
[NCV562SQ25T1G](#) [NCP715MX53TBG](#) [AP2202K-2.6TRE1](#) [NCV8170BMX300TCG](#) [NCV8152MX300180TCG](#) [NCP700CMT45TBG](#)  
[AP7315-33W5-7](#) [LD56100DPU28R](#) [NCP154MX180300TAG](#) [NJM2878F3-45-TE1](#) [S-1313D18-N4T1U4](#) [AP7343D-31FS4-7B](#) [AP7315D-](#)  
[33FS4-7B](#) [LD59150PUR](#) [XC6215B3027R-G](#) [XC6216C201MR-G](#) [XC6504A2019R-G](#) [XC6504A2517R-G](#) [XC6504A251NR-G](#)  
[XC6702D331ER-G](#) [NCP3334AMTADJTBG](#)