

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION		DATE	APVD
E	B			C1		REVISED PER ECO-11-005150	21MAR11

- NOTES:
1. ELECTRICAL DATA:

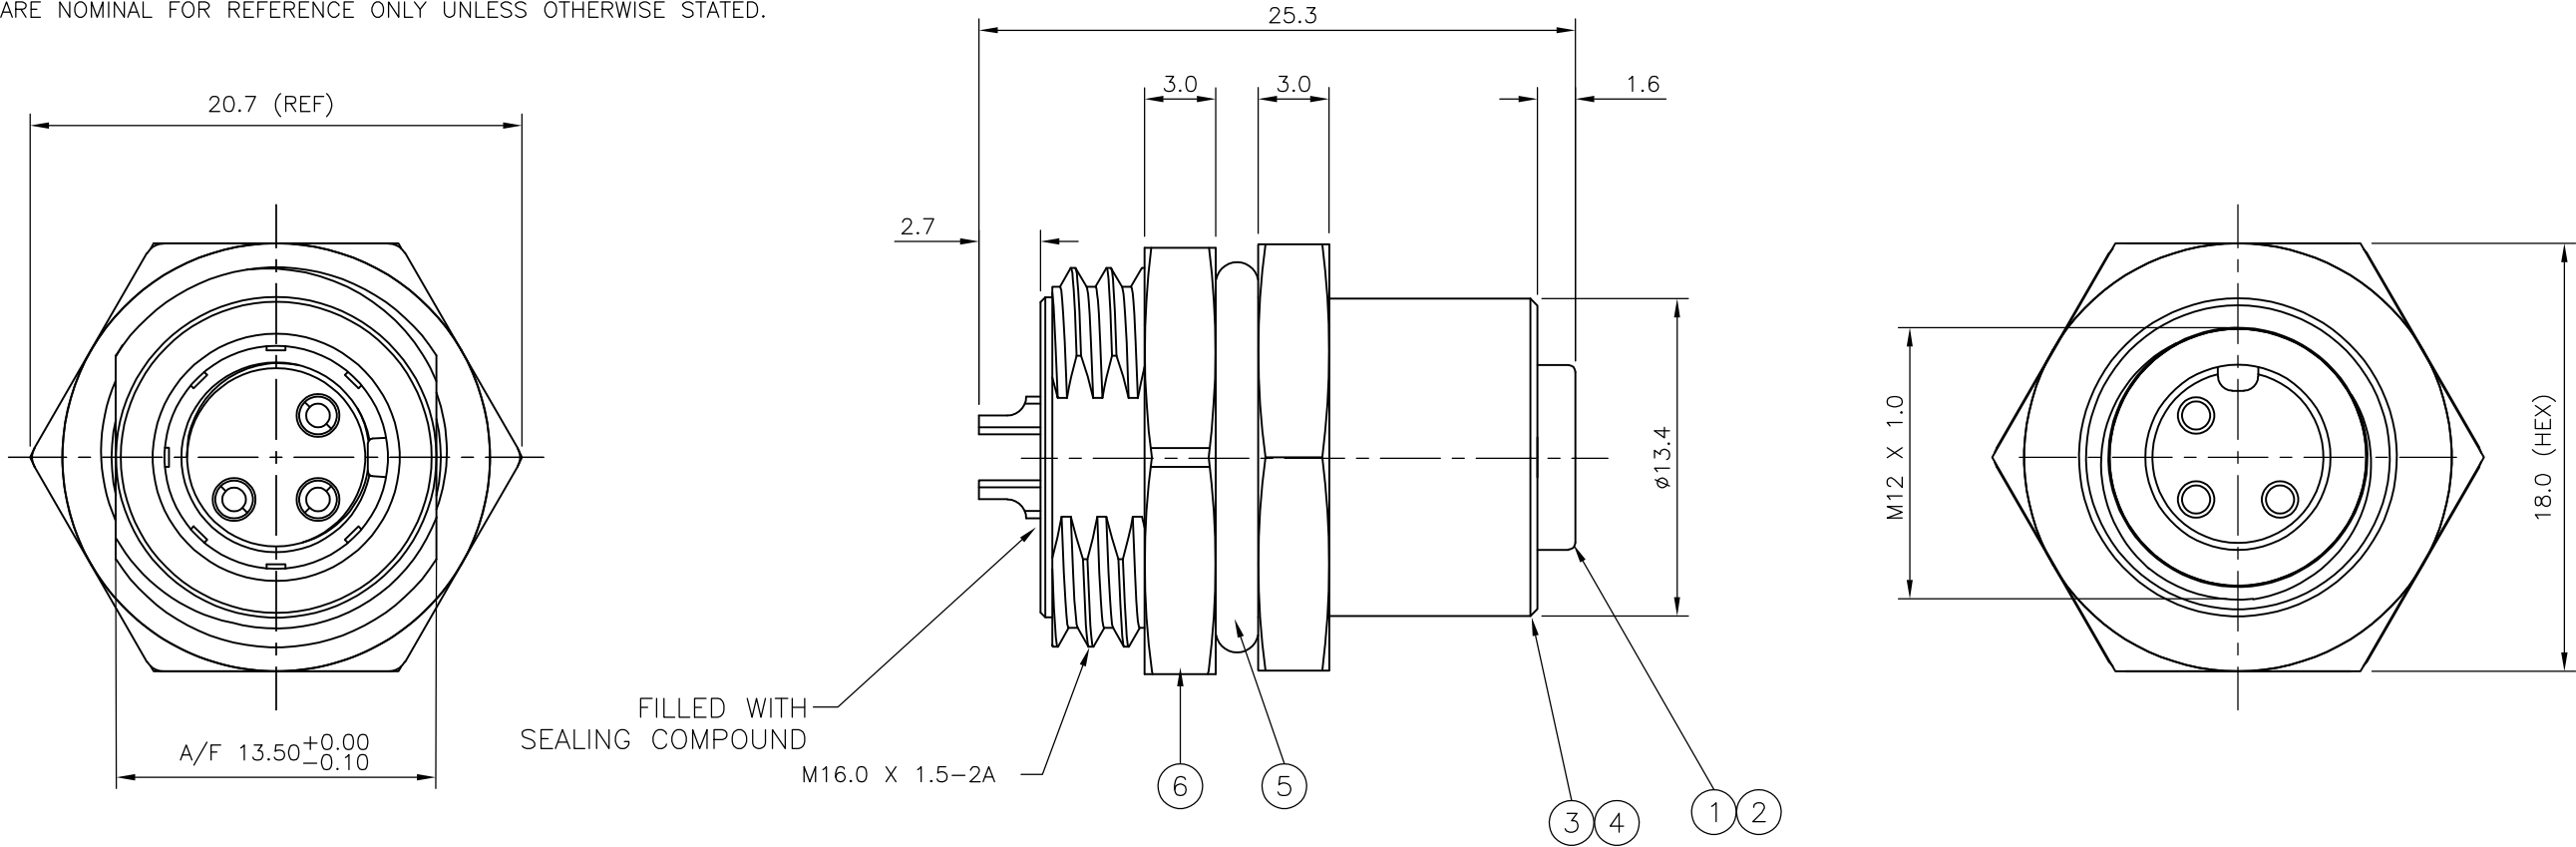
CONTACT RESISTANCE: 10 mOhm MAX
INSULATION RESISTANCE: 100 MOhm MIN at 500VDC
CURRENT RATING: 5 AMPS (FOR 3, 4 AND 5 POSITIONS) AND 2 AMPS (FOR 8 POSITION ONLY)
BREAKDOWN VOLTAGE: 500 VAC MIN PER MINUTE
2. ENVIRONMENTAL:

OPERATING TEMPERATURE: -25°C TO +90°C
SEALING REQUIREMENTS: IP67
3. PROD SPEC:

108-3641
4. PACKAGING:

107-3334
5. FOR TECHNICAL DATA REFER TO YOUR LOCAL TE CONNECTIVITY SALES OFFICE.
6. ALL DIMENSIONS ARE NOMINAL FOR REFERENCE ONLY UNLESS OTHERWISE STATED.

ITEM	DESCRIPTION	MATERIAL	FINISH/COLOUR	QUANTITY / ITEM			
				-1	-2	-3	-4
1	CONNECTOR HOUSING	GF NYLON	BLACK	1	1	1	1
2	SOCKET CONTACT	BRASS	0.15µm GOLD OVER NICKEL	3	4	5	8
3	CONNECTOR BODY	ZINC DIE CAST	2.5µm NICKEL PLATED	1	1	1	1
4	'O' RING	VITON	GREEN	1	1	1	1
5	'O' RING	EPDM	BLACK	1	1	1	1
6	SCREW NUT	ZINC DIE CAST	2.5µm NICKEL PLATED	1	1	1	1



M12 METAL FEMALE PANEL MOUNT CONNECTOR, SOLDER, STRAIGHT, REAR (HEXAGONAL) MOUNTING	8	1838891-4
M12 METAL FEMALE PANEL MOUNT CONNECTOR, SOLDER, STRAIGHT, REAR (HEXAGONAL) MOUNTING	5	1838891-3
M12 METAL FEMALE PANEL MOUNT CONNECTOR, SOLDER, STRAIGHT, REAR (HEXAGONAL) MOUNTING	4	1838891-2
M12 METAL FEMALE PANEL MOUNT CONNECTOR, SOLDER, STRAIGHT, REAR (HEXAGONAL) MOUNTING	3	1838891-1
DESCRIPTION	NO. OF POS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN A.Morey	22FEB06	 TE Connectivity		
		CHK F.Wheeler-King	01MAR07			
		APVD F.Wheeler-King	01MAR07	NAME M12 METAL FEMALE PANEL MOUNT CONNECTOR, SOLDER, STRAIGHT, REAR (HEXAGONAL) MOUNTING		
		PRODUCT SPEC				
		APPLICATION SPEC				
		WEIGHT		SIZE A3	CAGE CODE 00779	DRAWING NO C-1838891
		CUSTOMER DRAWING		SCALE NTS	SHEET 1 OF 2	REV C1

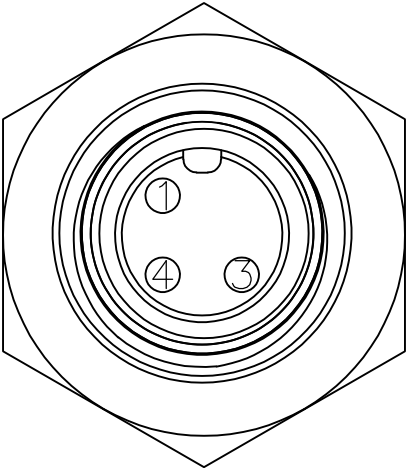
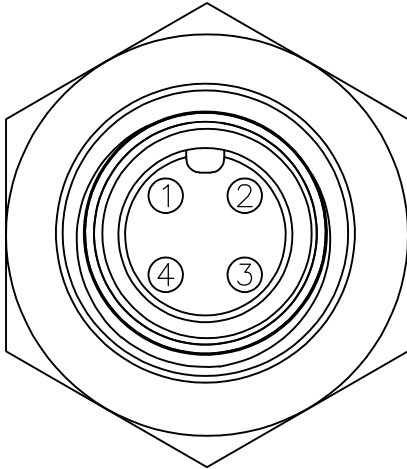
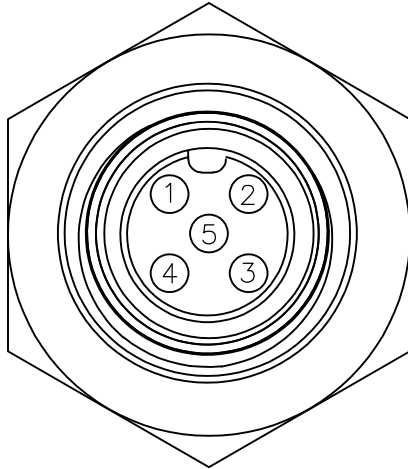
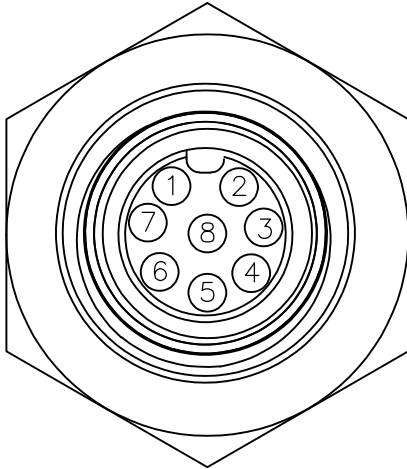
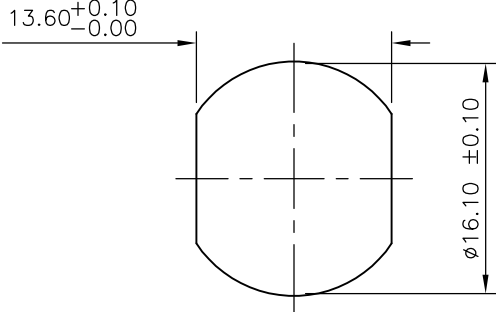
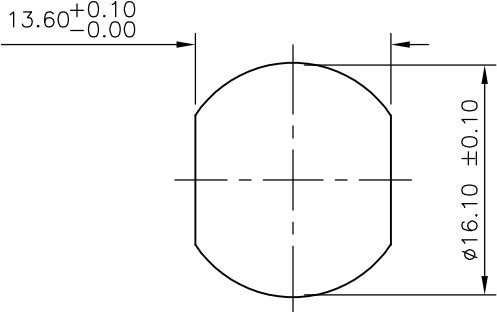
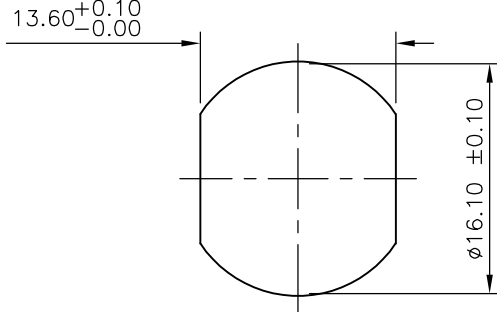
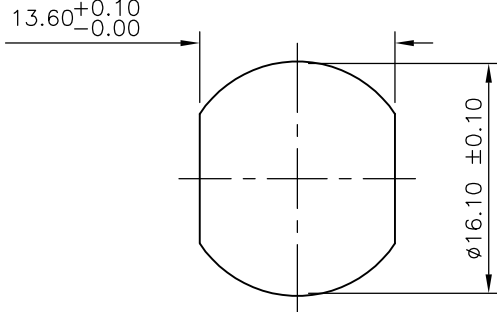
4

3

2

1

LOC	DIST	REVISIONS				
P	LTR	DESCRIPTION		DATE	DWN	APVD
	-	SEE SHEET 1		-	-	-

1838891-1	1838891-2	1838891-3	1838891-4
PIN ASSIGNMENTS FRONT VIEW 	PIN ASSIGNMENTS FRONT VIEW 	PIN ASSIGNMENTS FRONT VIEW 	PIN ASSIGNMENTS FRONT VIEW 
RECOMMENDED PANEL CUT-OUT (MAX PANEL THICKNESS 4.5mm) 	RECOMMENDED PANEL CUT-OUT (MAX PANEL THICKNESS 4.5mm) 	RECOMMENDED PANEL CUT-OUT (MAX PANEL THICKNESS 4.5mm) 	RECOMMENDED PANEL CUT-OUT (MAX PANEL THICKNESS 4.5mm) 

THIS DRAWING IS A CONTROLLED DOCUMENT.	DWN A.Morey	28FEB07	TE Connectivity			
	CHK F.Wheeler-King	01MAR07				
	APVD F.Wheeler-King	01MAR07	NAME M12 METAL FEMALE PANEL MOUNT CONNECTOR, SOLDER, STRAIGHT, REAR (CIRCULAR) MOUNTING			
	PRODUCT SPEC -		-			
	APPLICATION SPEC -		SIZE A3	CAGE CODE 00779	DRAWING NO C-1838891	RESTRICTED TO -
CUSTOMER DRAWING		SCALE NTS	SHEET 2 OF 2	REV C1		

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Circular Metric Connectors](#) ***category:***

Click to view products by [TE Connectivity](#) ***manufacturer:***

Other Similar products are found below :

[600X518037X](#) [6STD15PCR99B70A](#) [8R4000A16M020](#) [8R5000A16M005](#) [1200910002](#) [1203580030](#) [1200910008](#) [1200910011](#) [1300140094](#)
[130203-0054](#) [1300140026](#) [1300150099](#) [RF-12S1N8A90DU](#) [1-3637-600-5205](#) [1612618](#) [21036836414](#) [8R4006A16M010](#) [1604232](#)
[1R3006A20M005](#) [RF-12P1N8A80DU](#) [RF-12P1N8A90DU](#) [41-40011](#) [42-00006](#) [42-01015](#) [4-22279-4](#) [4-22281-1](#) [4-22284-9](#) [43-00113](#) [43-](#)
[01088](#) [43-01203](#) [41-40013](#) [42-00008](#) [43-00343](#) [43-01026](#) [43-01162](#) [43-01173](#) [43-10000](#) [XS3P-M421-2](#) [600X518050X](#) [SACC-DSI-FS-5P-](#)
[PG9-L180 SC](#) [8R5006A16M020](#) [8R5006A16M005](#) [8R4000A16M010](#) [6-22279-3](#) [1605332](#) [N03FA03144](#) [1300140077](#) [43-16213](#) [43-01338](#)
[XS2RD4265](#)