

## **CODE 41 - BRAID TAIL BACKSHELL**

204M016-19B08
SERIES ORDER NUMBER (TABLE 1)
MATERIAL  REFER TO CH00-0250-004
FINISH  REFER TO CH00-0250-004
ENTRY SIZE (TABLE 2)
MODIFICATION CODE  REFER TO CH00-0250-004 (2)

## NOTES:

TE CAGE CODE: 06090

POLAMCO/TE CAGE CODE: U5792


- THIS PRODUCT IS DESIGNED TO TERMINATE A HEAT SHRINKABLE LIPPED BOOT TO A CONNECTOR.
- ②FOR ADDITIONAL DIMENSIONS, ORDERING INFORMATION AND MODIFICATIONS, SEE CH00-0250-004
- 3. BACKSHELL TO BE PERMANENTLY MARKED/BAGGED AND LABELLED WITH CODE IDENTIFICATION NUMBER AND PART NUMBER. (e.g. 06090-204M012-19B08).
- 4 WHEN ENTRY SIZE EXCEEDS "MAX ENTRY", A 2 PIECE BACKSHELL (TYPE 2) IS SUPPLIED.
- 5. BRAID TERMINATION RING MAY BE SUPPLIED AS TINEL-LOCK SHAPE MEMORY RING AT MANUFACTURERS OPTION.
- BACKSHELL MATES TO MIL-DTL-38999 SERIES I & II, CLASS E & T, MS27466, MS27467, MS27468, MS27472, MS27473, MS27474, MS27479, MS27480, MS27481, MS27484, MS27497, MS27652, MS27653, MS27654, MS27656 CONNECTORS.

DRA	WN K.WINCZURA	DATE 17/04/2015	 ⊕-{	3RD ANGLE PROJECTION	TITLE:					
CHEC	KED	17/04/2015	NOT TO SCALE			BRAID TAIL BACKSHELL				
APPR	OVED K.SHEPPARD	27/04/2015	ALL DIMENSIO	IERWISE SPECIFIED ONS IN MILLIMETRES		DIVAID TAIL DAOROTT				
APPROVED H.SMITH 01/09/2015		01/09/2015	GENERAL TOL LINEAR +/-0,25MM ANGULAR +/- 1°		ASSY USED ON:				Pola	mco
REVISIONS										
LTR	DESCRIPTIO	N	DATE	APPROVED		MIL-DTL-38999 SERIES I & II			TE	
М	REVISED PER ECN AD	930								connectivity
N	REVISED PER ECO-15	-012000	01/09/2015	H.SMITH	TE CONNECTIVITY - POLAMCO LTI	D RESERVES THE RIGHT TO AMEND THIS DRAWING	DRAWING NO:	DRAWING	RFV.	SHT

AND THE INFORMATION SET FORTH HEREON AT ANY TIME. USERS SHOULD

INDEPENDENTLY EVALUATE THE SUITABILITY OF THE PRODUCT FOR THEIR APPLICATION.

204M0XX

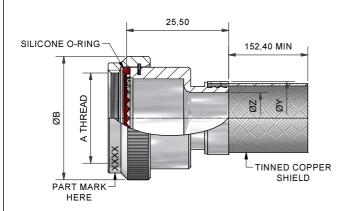

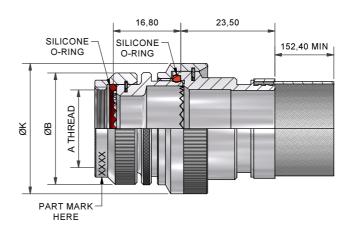


TABLE 1

IABLE I				
ORDER	SHELL SIZE	Α	ØB	MAX
NUMBER	SER 1 / SER 2	THREAD	MAX	ENTRY
08	09 / 08	7/16-28UNEF	18,3	04
10	11 / 10	9/16-24UNEF	21,5	06
12	13 / 12	11/16-24UNEF	24,5	08
14	15 / 14	13/16-20UNEF	27,8	10
16	17 / 16	15/16-20UNEF	30,8	12
18	19 / 18	1 1/16-18UNEF	34,1	13
20	21 / 20	1 3/16-18UNEF	37,3	15
22	23 / 22	1 5/16-18UNEF	40,5	17
24	25 / 24	1 7/16-18UNEF	43,7	18
24	25 / 24	1 //10-18UNEF	43,7	18

TABLE 2

IABLE 2				
ENTRY	ØK	ØZ	ØY	
SIZE	MAX	REF	REF	
03	NA	4,77	13,1	
04	NA	6,35	13,1	
05	21,0	7,92	13,1	
06	21,0	9,52	17,9	
07	21,0	11,12	17,9	
08	24,5	12,70	17,9	
09	24,5	14,27	17,9	
10	29,0	15,87	24,2	
11	32,5	17,47	24,2	
12	32,5	19,05	24,2	
13	35,5	20,62	24,2	
14	35,5	22,23	30,6	
15	37,0	23,82	30,6	
16	37,0	25,40	30,6	
17	40,0	26,98	33,2	
18	40,0	28,60	33,2	
20	43,5	31,80	42,0	
21	48,5	33,34	42,0	
22	48,5	35,00	42,0	
24	52,1	38,10	42,0	
28	58,5	44,45	49,0	

DRAWN	K.WINCZURA	DATE 17/04/2015	<b>A</b> 1	3RD ANGLE PROJECTION		
CHECKED		17/04/2015	7	NOT TO SCALE		
APPROVED	K.SHEPPARD	27/04/2015	UNLESS OTHERWISE SPECIFIED			
APPROVED	H.SMITH	01/09/2015	GENERAL TOL LINEAR +/-0,25MM ANGULAR +/- 1°			
REVISIONS						

LTR DATE DESCRIPTION APPROVED M REVISED PER ECN AD930 N REVISED PER ECO-15-012000 H.SMITH

TE CAGE CODE: 06090

POLAMCO/TE CAGE CODE: U5792

TITLE:

## **BRAID TAIL BACKSHELL**

ASSY USED ON:

MIL-DTL-38999 SERIES I & II



SHT 2

Polamco

**TE** 

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Circular MIL Spec Strain Reliefs & Adapters category:

Click to view products by TE Connectivity manufacturer:

Other Similar products are found below:

896227-000 899170S004 0113-023-000 6000-063-0022 CS6624-000 620AB038Z136 620AS001Z108 620AS038Z112 620AS038Z120 620AS038Z132 620FB038NF08 620HA038NF09 620HA038NF11 620HA038NF13 620HA038NF25 620HB049NF17 620HS038NF11 620HS038Z121 620HS042XM19 620HS042XM25 620HS048B17 620MS064NF12 620MS065Z107 620MS065ZNU06 627-123NF21-11 627-125NF23-6 630J041M06H 630J041M20H 637S010NF0212H 637S010NF0416A 640830-000 659943-000 66241-10A CW0597-000 CW0598-000 CW0948-000 CY0122-000 M85049/41-6A W/B M85049/42-12DS M85049/47N8 M85049/51-1-14S M85049/51S16S M85049/60-1N16 M85049/60-2G12W M85049/69-11N CZ3661-000 D02922-000 70.360.1628.0 703797-000 705825-000