



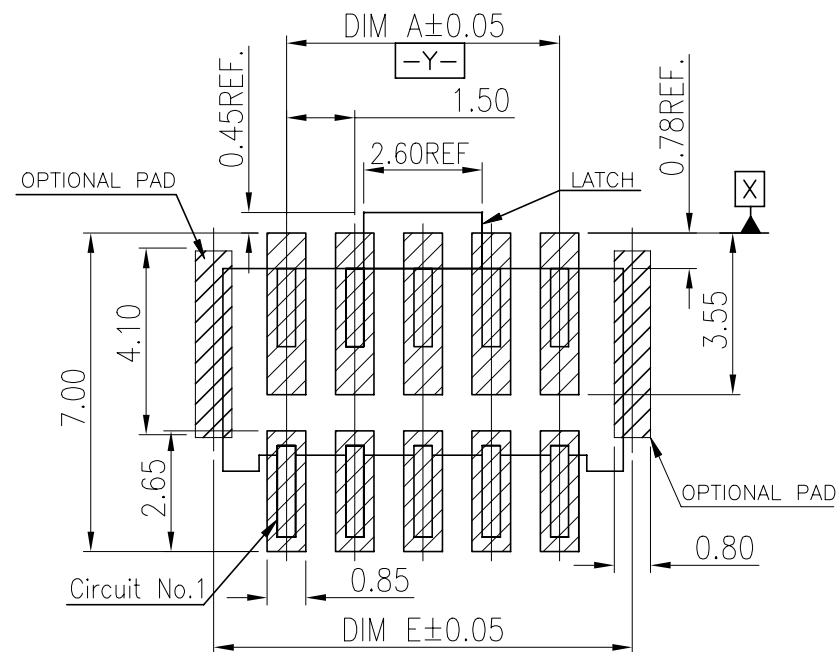

3. REFLOW SOLDER CAPABLE TO 260°C, PER PRODUCTION SPEC.

TOLERANCE ± 0.05

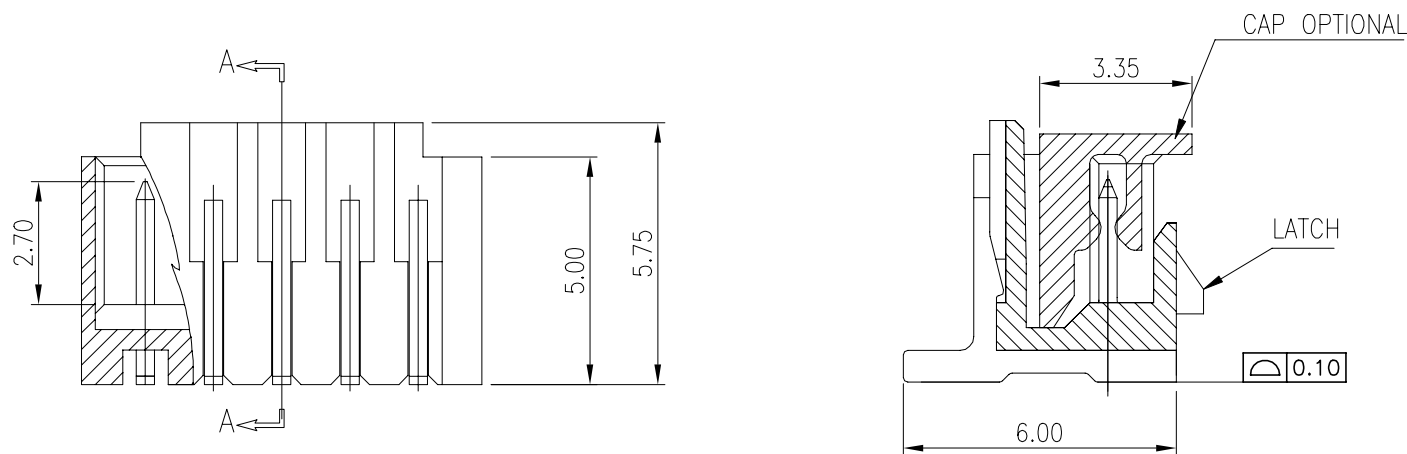



SEC. A-A

BLACK	4.7	3.4	3.8	4.3	1.5	2	6-2380320-2	4-2380320-2
	6.2	4.9	5.3	5.8	3.0	3	6-2380320-3	4-2380320-3
	7.7	6.4	6.8	7.3	4.5	4	6-2380320-4	4-2380320-4
	9.2	7.9	8.3	8.8	6.0	5	6-2380320-5	4-2380320-5
	10.7	9.4	9.8	10.3	7.5	6	6-2380320-6	4-2380320-6
	12.2	10.9	11.3	11.8	9.0	7	6-2380320-7	4-2380320-7
	13.7	12.4	12.8	13.3	10.5	8	6-2380320-8	4-2380320-8
	15.2	13.9	14.3	14.8	12.0	9	6-2380320-9	4-2380320-9
	16.7	15.4	15.8	16.3	13.5	10	7-2380320-0	5-2380320-0
	18.2	16.9	17.3	17.8	15.0	11	7-2380320-1	5-2380320-1
	19.7	18.4	18.8	19.3	16.5	12	7-2380320-2	5-2380320-2
	21.2	19.9	20.3	20.8	18.0	13	7-2380320-3	5-2380320-3
	22.7	21.4	21.8	22.3	19.5	14	7-2380320-4	5-2380320-4
	24.2	22.9	23.3	23.8	21.0	15	7-2380320-5	5-2380320-5
NATURAL	4.7	3.4	3.8	4.3	1.5	2	2-2380320-2	2380320-2
	6.2	4.9	5.3	5.8	3.0	3	2-2380320-3	2380320-3
	7.7	6.4	6.8	7.3	4.5	4	2-2380320-4	2380320-4
	9.2	7.9	8.3	8.8	6.0	5	2-2380320-5	2380320-5
	10.7	9.4	9.8	10.3	7.5	6	2-2380320-6	2380320-6
	12.2	10.9	11.3	11.8	9.0	7	2-2380320-7	2380320-7
	13.7	12.4	12.8	13.3	10.5	8	2-2380320-8	2380320-8
	15.2	13.9	14.3	14.8	12.0	9	2-2380320-9	2380320-9
	16.7	15.4	15.8	16.3	13.5	10	3-2380320-0	1-2380320-0
	18.2	16.9	17.3	17.8	15.0	11	3-2380320-1	1-2380320-1
	19.7	18.4	18.8	19.3	16.5	12	3-2380320-2	1-2380320-2
	21.2	19.9	20.3	20.8	18.0	13	3-2380320-3	1-2380320-3
	22.7	21.4	21.8	22.3	19.5	14	3-2380320-4	1-2380320-4
	24.2	22.9	23.3	23.8	21.0	15	3-2380320-5	1-2380320-5
COLOR	DIM.E	DIM.D	DIM.C	DIM.B	DIM.A	POS.NO.	TYPE B	
							TYPE A	
							PLATING SPEC.	
							P/N	




CUSTOMER DRAWING	SCALE	N 1 / A	SHEET	1 OF 5	REV	A
------------------	-------	---------	-------	--------	-----	---

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

POS. NO	DIM A	DIM B	DIM C	DIM D
2	2.30	4.60	7.50	16.00
3	3.80	6.10		
4	5.30	7.60		

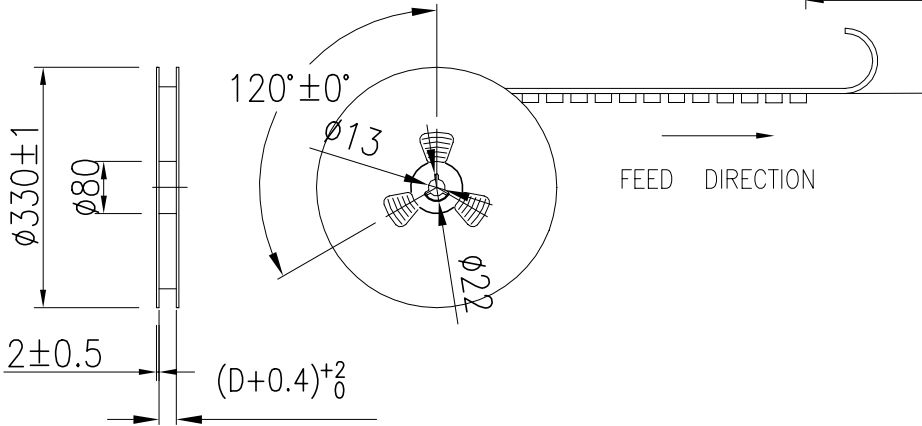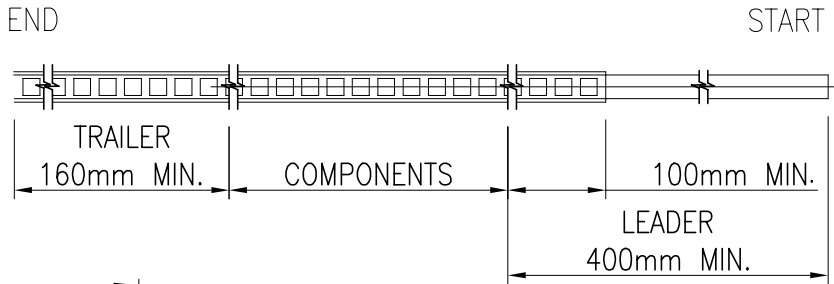

- NOTES:
1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE:±0.20mm
 2. CARRIER CAMBER NOT TO EXCEED 1mm IN 100mm.
 3. ALL DIMENSIONS MEET EIA-481-C REQUIREMENTS.
 4. MATERIAL: BLACK ANTI-STATIC POLYSTYRENE.
 5. THICKNESS: 0.40±0.05 mm.
 6. PACKING LENGHT PER 13” REEL : 12.4 METERS.
 7. COMPONENT LOAD PER 13” REEL : 950 PCS.
 8. PRODUCTS PLACEMENT MUST BE IN THE SAME DIRECTION.

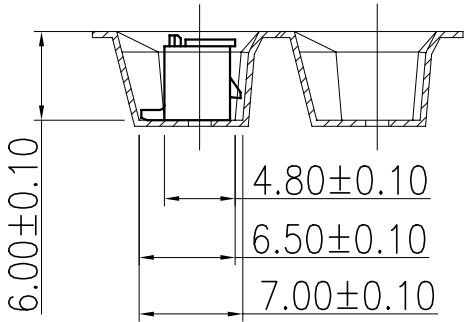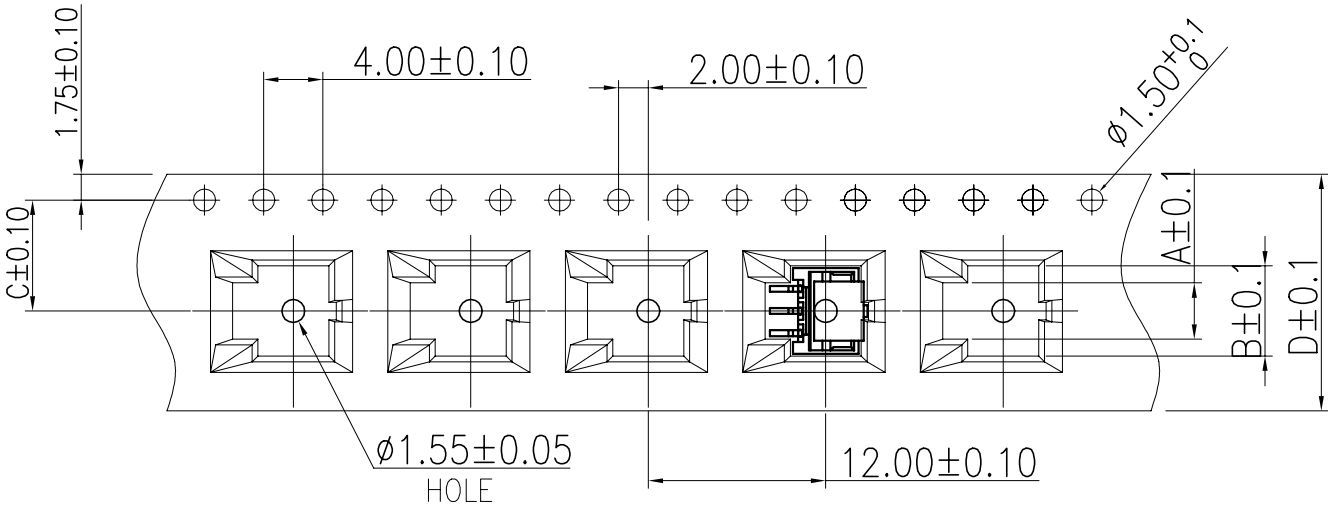

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN Jone Ji 23SEP2020	TE Connectivity Ltd.		
DIMENSIONS: mm		CHK Wenke He			
		APVD Wenke He	NAME 1.5P WTB VERTICAL TYPE WITH LATCH		
		PRODUCT SPEC			
MATERIAL SEE NOTE		FINISH -	SIZE A3		
		WEIGHT -			
		CUSTOMER DRAWING	SCALE N/A	SHEET 2 of 5	REV A

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

D

C

B



A

D




C


B

A

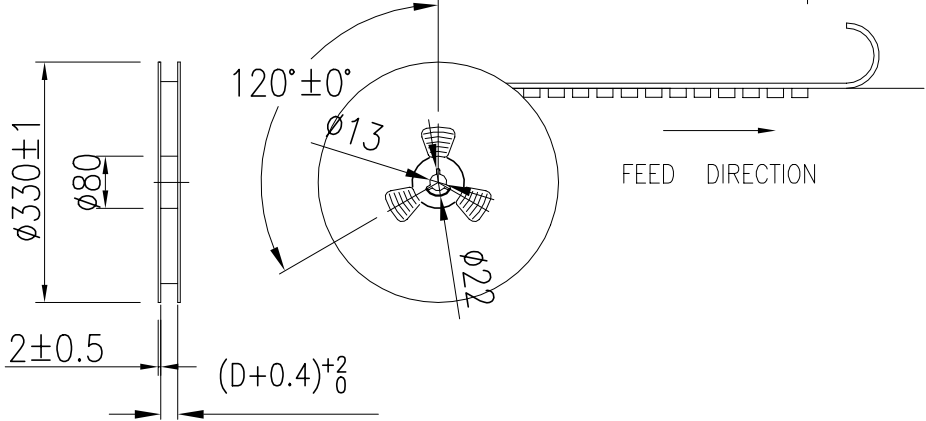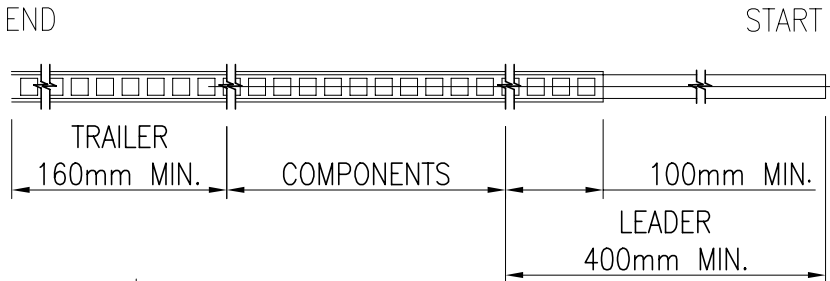

- NOTES:
- 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE: $\pm 0.20\text{mm}$
 - CARRIER CAMBER NOT TO EXCEED 1mm IN 100mm.
 - ALL DIMENSIONS MEET EIA-481-C REQUIREMENTS.
 - MATERIAL: BLACK ANTI-STATIC POLYSTYRENE.
 - THICKNESS: $0.40 \pm 0.05\text{ mm}$.
 - PACKING LENGHT PER 13" REEL : 12.4 METERS.
 - COMPONENT LOAD PER 13" REEL : 950 PCS.
 - PRODUCTS PLACEMENT MUST BE IN THE SAME DIRECTION.

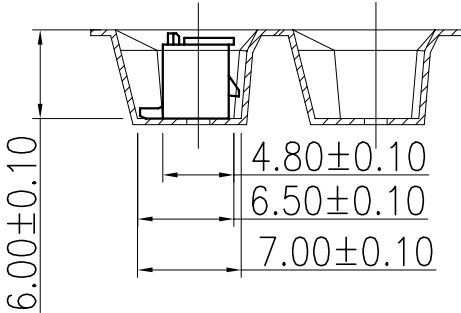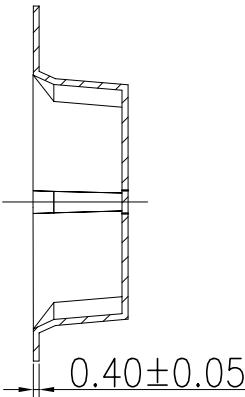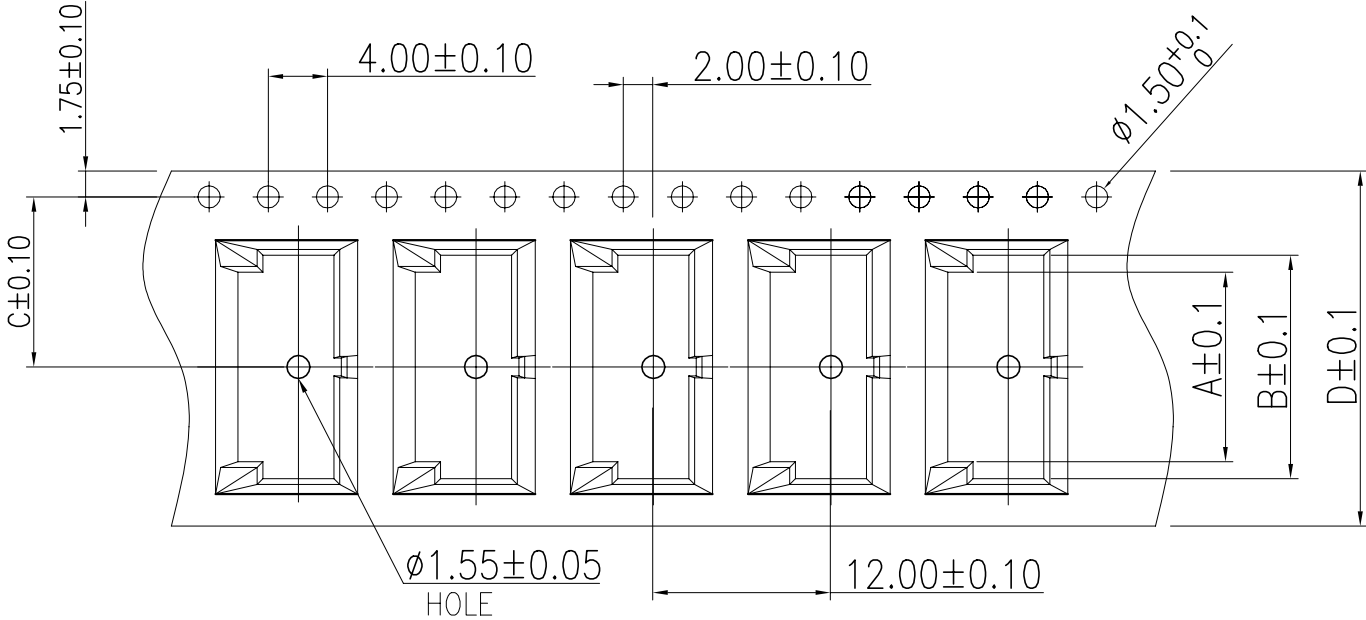

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN Jone Ji 23SEP2020	 TE Connectivity Ltd.		
DIMENSIONS: mm		CHK Wenke He			
		APVD Wenke He	NAME 1.5P WTB VERTICAL TYPE WITH LATCH		
		PRODUCT SPEC —	—		
MATERIAL SEE NOTE		FINISH —	RESTRICTED TO —		
		—	—		
		WEIGHT	SIZE A3	CAGE CODE 00779	DRAWING NO C-2380320
		CUSTOMER DRAWING	SCALE N/A	SHEET 3 of 5	REV A

P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

POS. NO	DIM A	DIM B	DIM C	DIM D	DIM S
10	14.3	16.6	14.2	32	28.4
11	15.8	18.1			
12	17.3	19.6			
13	18.8	21.1	20.2	44	40.4
14	20.3	22.6			
15	21.8	24.1			
16	23.3	25.6			
17	24.8	27.1			
18	26.3	28.6			
19	27.8	30.1			
20	29.3	31.6			

- NOTES:
- 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE:±0.20mm
 - CARRIER CAMBER NOT TO EXCEED 1mm IN 100mm.
 - ALL DIMENSIONS MEET EIA-481-C REQUIREMENTS.
 - MATERIAL: BLACK ANTI-STATIC POLYSTYRENE.
 - THICKNESS: 0.40±0.05 mm.
 - PACKING LENGHT PER 13" REEL : 12.4 METERS.
 - COMPONENT LOAD PER 13" REEL : 950 PCS.
 - PRODUCTS PLACEMENT MUST BE IN THE SAME DIRECTION.

D

C

B







A


D

C


B

A

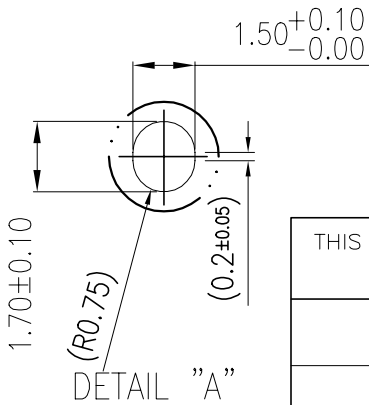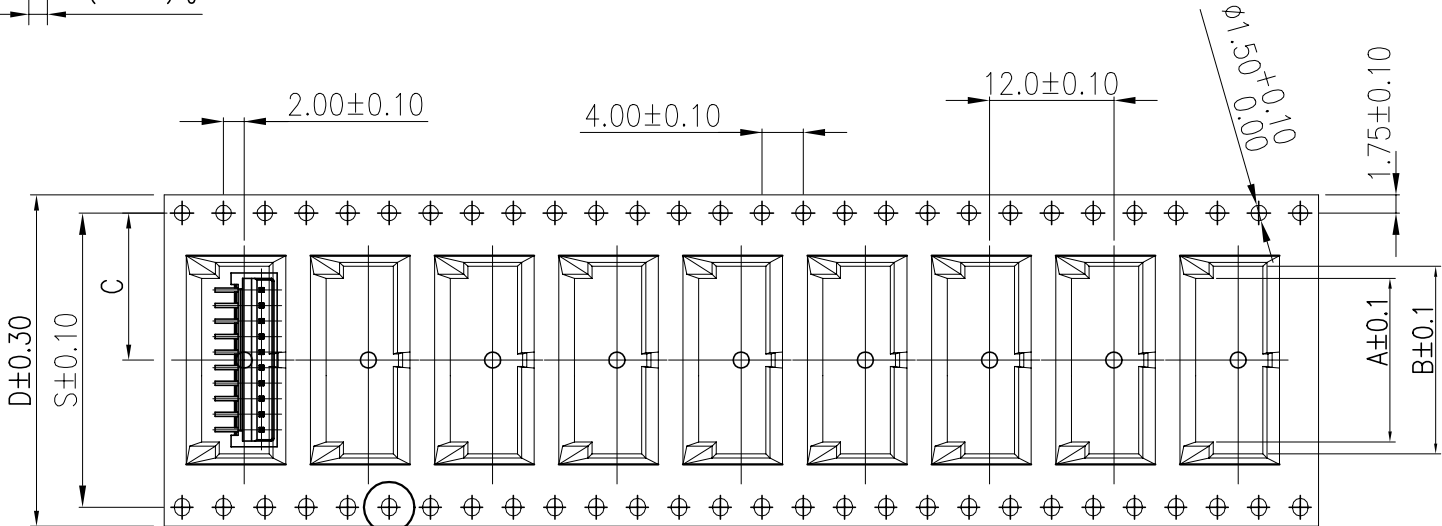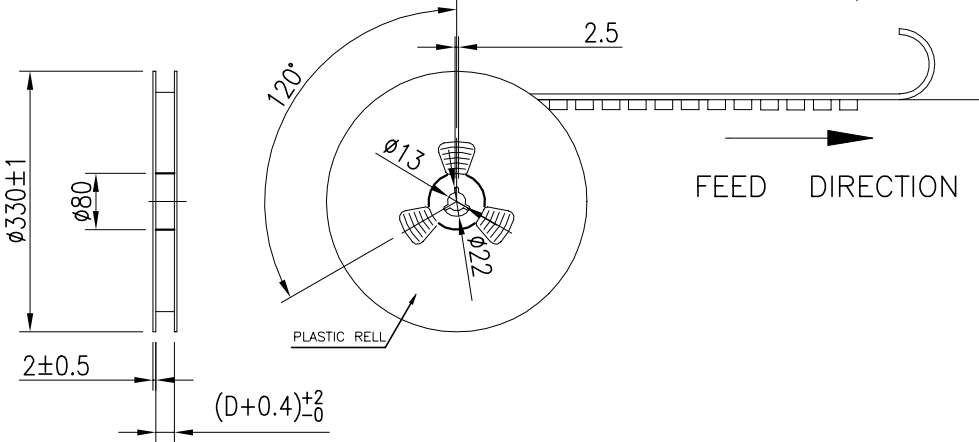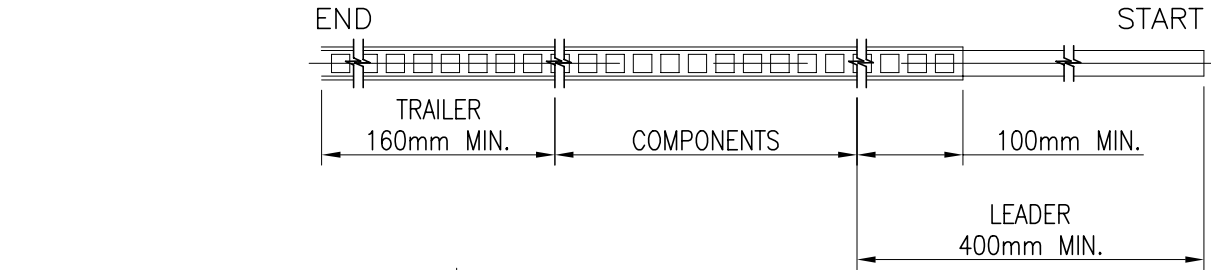


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	23SEP2020		 TE Connectivity Ltd.					
		CHK	Wenke He							
DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC± 0.5 1 PLC± 0.35 2 PLC± 0.25 3 PLC± 0.15 4 PLC± — ANGLES± 2°	APVD	Wenke He		NAME					
mm		PRODUCT SPEC	—							
		APPLICATION SPEC	—							
MATERIAL		FINISH	WEIGHT	A300779		DRAWING NO		RESTRICTED TO		
SEE NOTE		—		C-2380320				—		
CUSTOMER DRAWING					SCALE	N/A	SHEET	4 OF 5	REV	A

P	LTR	DESCRIPTION	DATE	DWN	APVD
	—	SEE SHEET 1	—	—	—

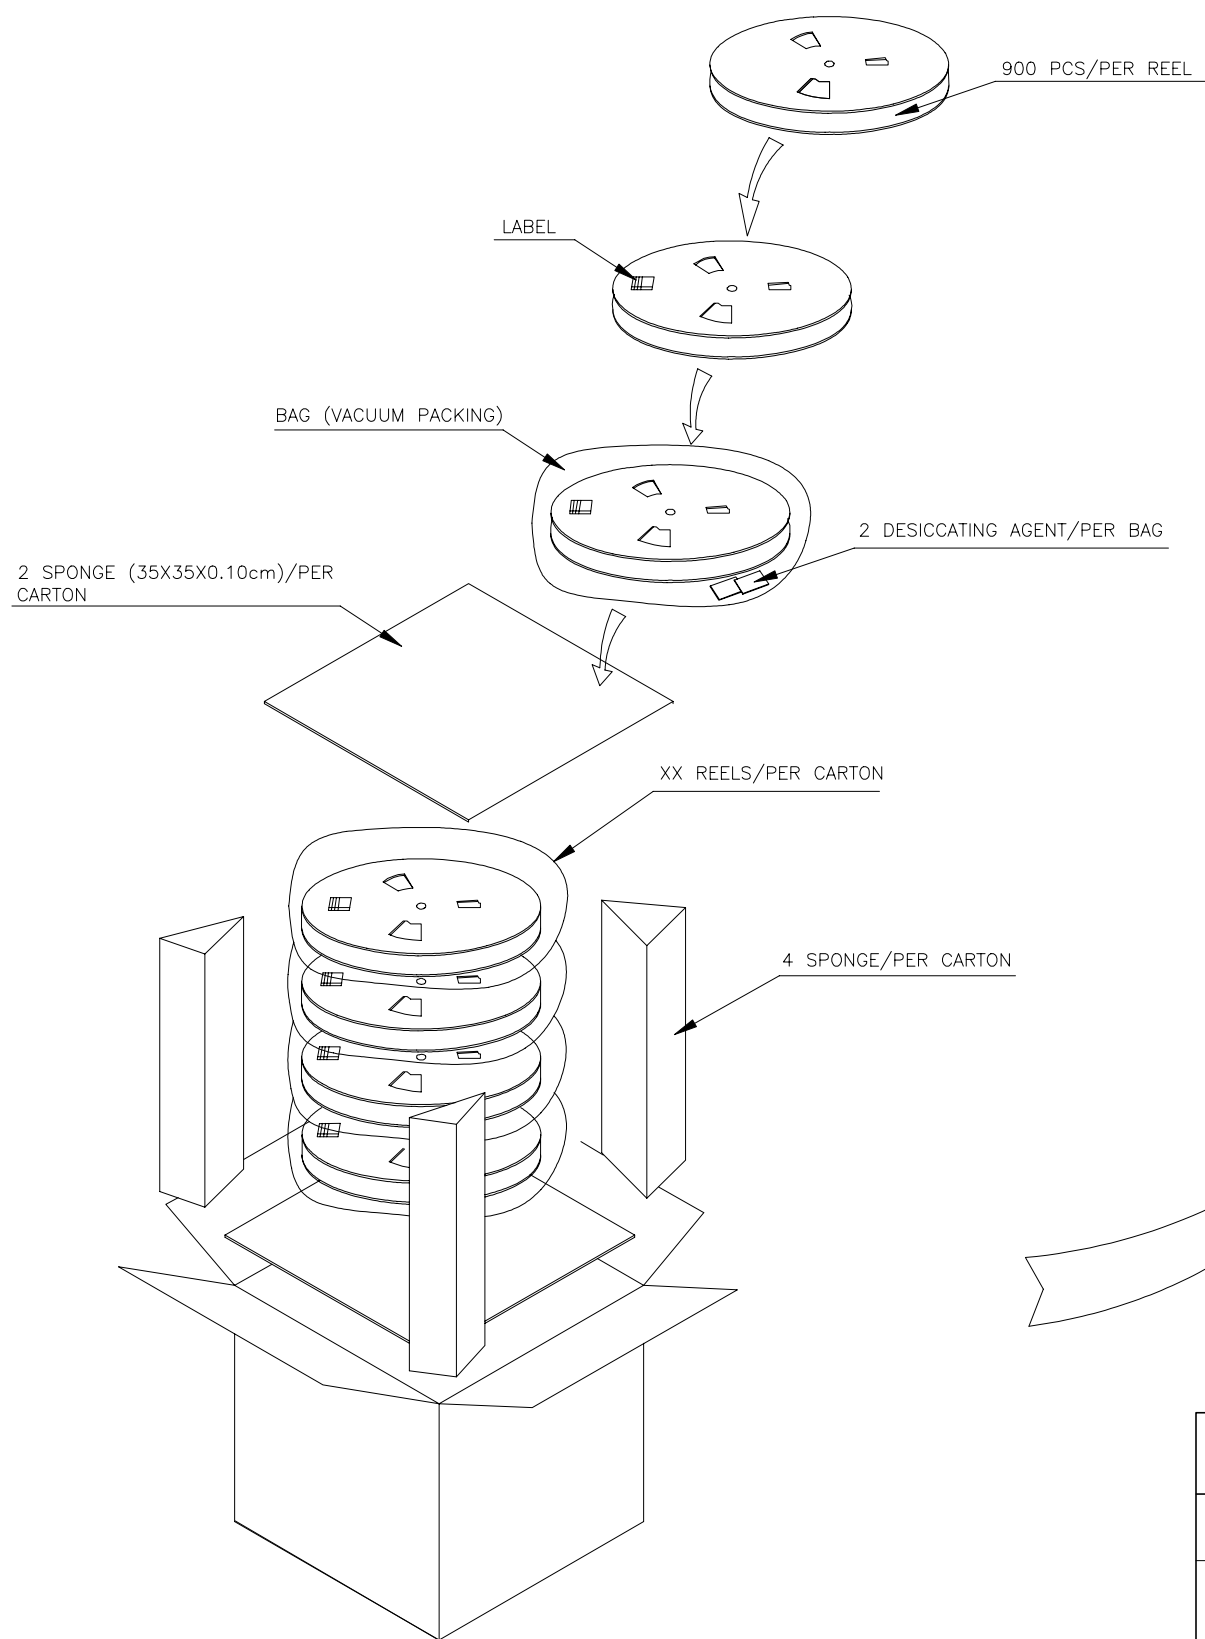


POS.NO.	PARTS PER PRIMARY CARTON	PARTS PER REEL	TOTAL REELS PER PRIMARY CARTON
2	15200(PCS)	950(PCS)	16
3	15200(PCS)	950(PCS)	16
4	15200(PCS)	950(PCS)	16
5	10450(PCS)	950(PCS)	11
6	10450(PCS)	950(PCS)	11
7	10450(PCS)	950(PCS)	11
8	10450(PCS)	950(PCS)	11
9	10450(PCS)	950(PCS)	11
10	8550(PCS)	950(PCS)	9
11	8550(PCS)	950(PCS)	9
12	8550(PCS)	950(PCS)	9
13	6650(PCS)	950(PCS)	7
14	6650(PCS)	950(PCS)	7
15	6650(PCS)	950(PCS)	7

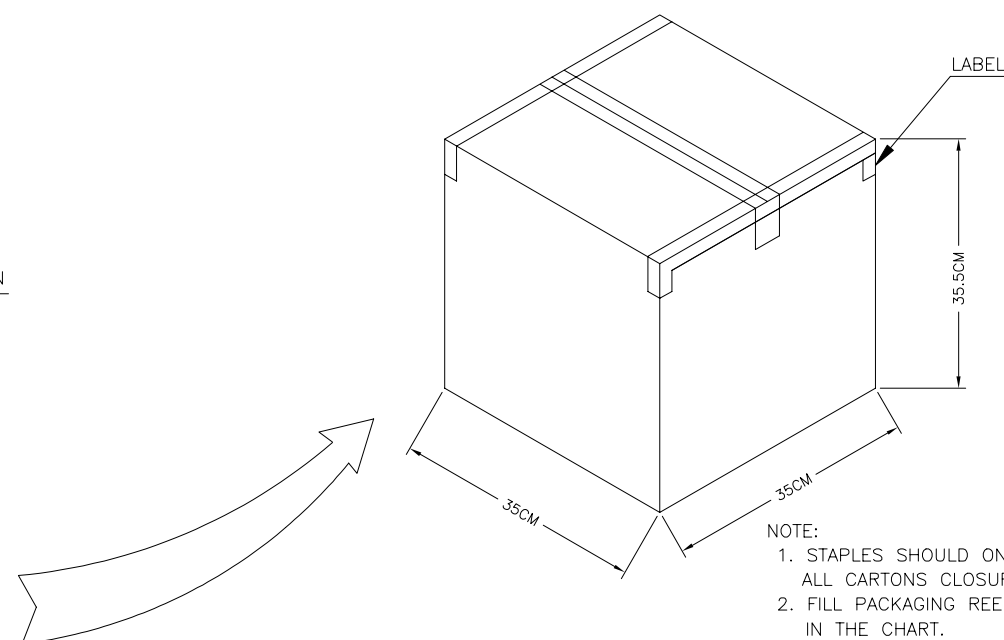

NOTE:

1. STAPLES SHOULD ONLY BE USED TO SET UP CARTON
ALL CARTONS CLOSURES MUST BE DONE WITH TAPE.
2. FILL PACKAGING REEL WITH THE QUANTITIES AS INDICATED
IN THE CHART.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN Jone Ji 23SEP2020		 TE Connectivity Ltd.	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME 1.5P WTB VERTICAL TYPE WITH LATCH —	
		0 PLC ± 0.5 1 PLC ± 0.35 2 PLC ± 0.25 3 PLC ± 0.15 4 PLC ± — ANGLES ± 2°		APVD Wenke He PRODUCT SPEC — APPLICATION SPEC — WEIGHT —	
MATERIAL SEE NOTE		FINISH —		SIZE A3	
				CAGE CODE 00779	
				DRAWING NO C-2380320	
				RESTRICTED TO —	
CUSTOMER DRAWING				SCALE N/A	SHEET 5 OF 5
				REV A	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) *category:*

Click to view products by [TE Connectivity](#) *manufacturer:*

Other Similar products are found below :

[892-18-020-10-001101](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [009176003701906](#) [0050291907](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#)
[609-3404](#) [61062-3](#) [61082-181009](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [641991-4](#) [644827-2](#) [65817-](#)
[010LF](#) [65817-015LF](#) [65863-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68645-018](#) [68648-049](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-](#)
[4853B](#) [707-5020](#) [707-5028](#) [71.350.2428.0](#) [71918-208LF](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-3052](#) [787-8014-00](#) [79531-3000](#)
[FCN-360C032-B](#) [FCN-367T-T012/H](#) [FCN-723D010/2](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#)