

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT — TE Connectivity Ltd.

ALL RIGHTS RESERVED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL DRAWN	13SEP2019	RV	JR

Performance Data

Contact Arrangement, Power Contacts — 1 Form X (SPST-NO-DM)**Rated Operating Voltage** — 12 - 900 VDC**Continuous (Carry) Current, Typical** — 500 A @ 65°C, 400 mcm conductors

Consult TE for required conductors for higher (500+ A) currents

Make/Break Current at Various Voltages¹ — See graph next page**Break Current at 320VDC**¹ — 2,000 A, 1 cycle³**Contact Resistance, Typ. (@200A)** — 0.2 mohms**Load Life** — See graph next page**Mechanical Life** — 1 million cycles**Contact Arrangement, Auxiliary Contacts** — 1 Form A (SPST-NO)**Aux. Contact Current, Max.** — 2A @ 30VDC / 3A @ 125VAC**Aux. Contact Current, Min.** — 100mA @ 8V**Aux. Contact Resistance, Max.** — 0.417 ohms @ 30VDC / .150 ohms @ 125VAC**Operate Time @ 25°C** —Close (includes bounce), Typ. — 25 ms
Bounce (after close only), Max. — 7 ms
Release (includes arcing), Max @ 2000A — 12 ms**Dielectric Withstanding Voltage** — 2,200 Vrms @ sea level (leakage <1mA)**Insulation Resistance @ 500VDC** — 100 megohms²**Shock, 11ms 1/2 Sine, Peak, Operating** — 20 G**Vibration, Sine, 80-2000Hz., Peak** — 20 G**Operating Ambient Temperature** — -40°C to +85°C**Weight, Typical** — 1.3 lb. (.60 kg)

Notes:

¹ Main power contacts² 50 at end of life³ Does not meet dielectric & IR after test, 1700 amp for unit with Aux. Contacts⁴ Contacts will operate with 0.8V_{nom} < V_{coil} < 1.1V_{nom} over temperature range.

Product Facts

■ Designed to be the lowest cost sealed contactor in the industry with its current rating (500+A carry, 2000A interrupt at 320Vdc)**■ Available with bottom or side mounting — not position sensitive****■ Optional auxiliary contact for easy monitoring of power contact position****■ Hermetically sealed — intrinsically safe, operates in explosive/harsh environments with no oxidation or contamination of coils or contacts, including long periods of non-operation****■ Typical applications include battery switching and backup, DC voltage power control, circuit protection and safety****■ Versatile coil/power connections****■ Designed and built in accordance to AIAG QS9000****■ RoHS compliant**

Typical Part Number ▶

LEV200 A 4 N A A

Series:

LEV200 = 500+ Amp, 12-900Vdc Contactor

Contact Form:

A = Normally Open

H = Normally Open with Aux. Contacts. (Option "H" requires option "A" in Coil Wire Length and option "N" in Coil Terminal Connector.)

Note: Other auxiliary contact forms available. Consult factory.

Coil Voltage:

4 = 12Vdc 5 = 24Vdc B = 28Vdc

6 = 48Vdc K = 72Vdc

8 = 96Vdc L = 110Vdc O = 115Vac 9 = 240Vac

Notes: Consult factory for detailed specifications and availability of coils not listed in "Coil Data" table above. In coil voltage codes, 115Vac is designated by the letter "O" rather than the numeral "0."

Coil Wire Length:

A = 15.3 in (390 mm) N = None (Requires option "A" in next step.)

Coil Terminal Connector:

N = None, stripped wires (Requires option "A" in previous step.)

A = Studs, #10-32 Threaded (Electrical connection is made to the tab at the base of the stud.)

Note: Specify option A, stripped wires, for coil voltages > 96Vdc

Mounting & Power Terminals:

A = Bottom Mount & Male 10mm x M8 Threaded Terminals

F = Side Mount & Male 10mm x M8 Threaded Terminals


Consult factory regarding other available mountings and power terminals.

Coil Data (Valid Over Temperature Range)⁴


Nominal Voltage	12Vdc	24Vdc	48Vdc	72Vdc
Pickup Voltage (Will Operate)	9.0Vdc	19.0Vdc	38.0Vdc	57.0Vdc
Voltage (Max.)	15Vdc	30Vdc	60Vdc	90Vdc
Dropout Voltage	0.75 - 2.0Vdc	1.0 - 5.0Vdc	2.0 - 7.0Vdc	3.0 - 12.0Vdc
Coil Resistance @ 25° (Typ.)	11 ohms	40 ohms	145 ohms	357 ohms

Outline Dimensions


Side Mount Enclosure

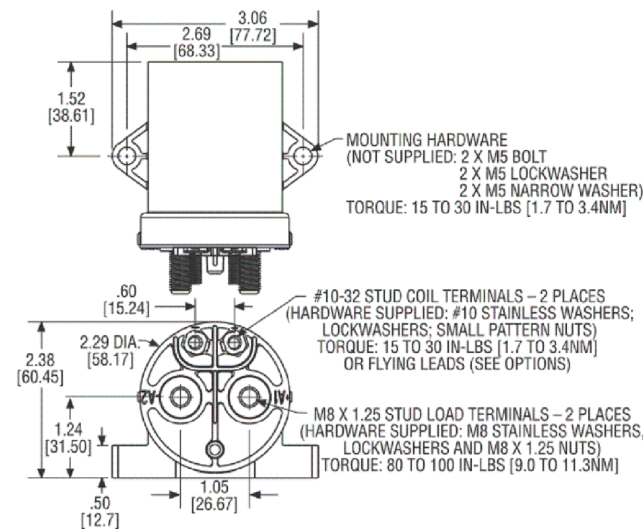

Bottom Mount Enclosure

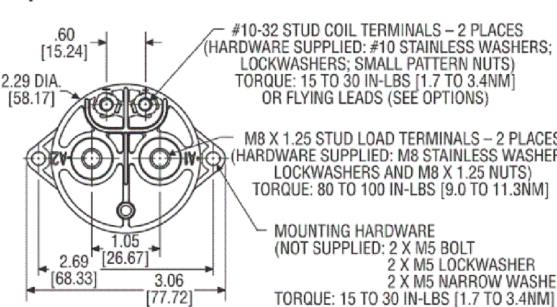**Note:** When stud terminals are specified for coil connections, the electrical connection is made at the tab located at the base of the stud.


Estimated Make & Break Power Switching Ratings

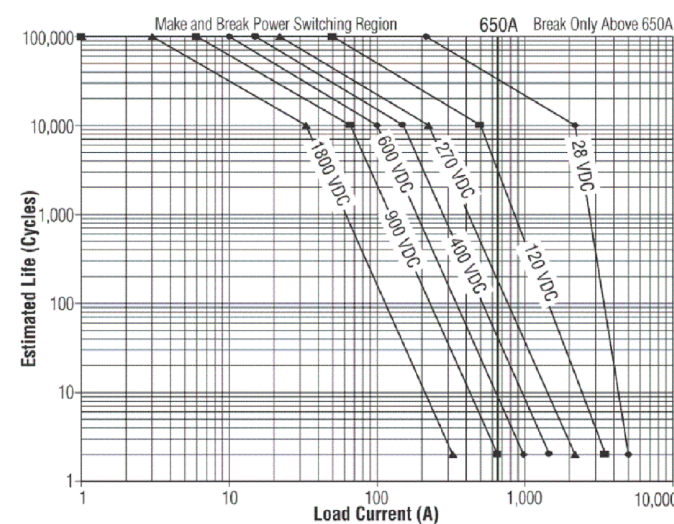

NOTES:

- For resistive loads with 300µH maximum inductance. Consult factory for inductive loads.
- Estimates based on extrapolated data. User is encouraged to confirm performance in application.
- End of life when dielectric strength between terminals falls below 50 megohms @ 500VDC.
- The maximum make current is 650A to avoid contact welding.

LEV200 Capacitive Make Test Curves for Pre-Charged Motor Controller

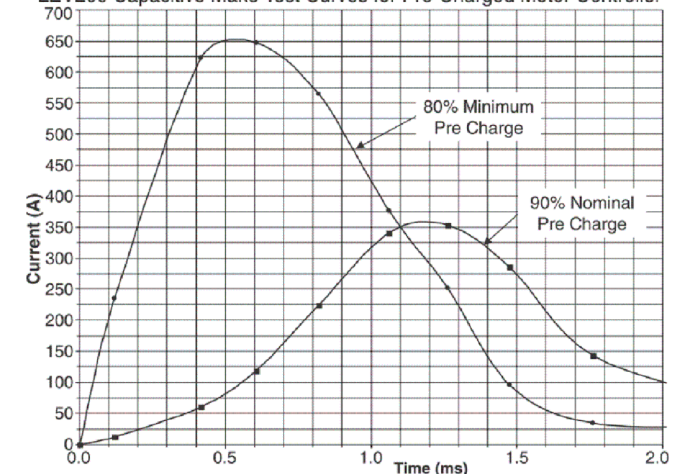

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:
	± —
	± —
	± —
	± —
	± —
	± —
MATERIAL	FINISH
—	—

DWN RV	13SEP2019
CHK RV	13SEP2019
APVD JR	13SEP2019
PRODUCT SPEC	—
APPLICATION SPEC	—
WEIGHT	—
CUSTOMER DRAWING	—

TE TE Connectivity

NAME			
LEV200 SERIES			
SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	—	LEV200—SERIES	—
SCALE		SHEET	REV
NTS		1 OF 1	A

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Industrial Relays](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[6-1617801-8](#) [6-1618107-9](#) [EV250-4A-02](#) [EV250-6A-01](#) [FCA-325-159](#) [FCA-410-138](#) [8-1618273-6](#) [9-1618397-7](#) [GCA32A208VAC60HZ](#)
[GCA63A600VAC60HZ](#) [1-1833005-4](#) [H-16/S1](#) [H-8C](#) [H-8/S68](#) [ACC530U20](#) [RF303ZM4-12](#) [DH18DA](#) [AR4-15F13-C01](#) [AR7-41F11](#)
[ATL68011](#) [AVR907](#) [B329](#) [B490A](#) [1618095-3](#) [1618104-9](#) [1618279-1](#) [BHR124Y](#) [N417](#) [2071229-4](#) [2-1617748-6](#) [2-1618396-6](#) [2-1618398-1](#)
[JMAPD-5XL](#) [PBE-120/208-ASE](#) [JMGACD-5M](#) [JMGSCD-5L](#) [PBO-40A3040](#) [KA-3C-12A](#) [RT334012WG](#) [SAH159](#) [SF5201F02](#) [301-17SX](#)
[SL6H3-26.5VDC](#) [1618105-2](#) [1618112-6](#) [1618113-5](#) [1618276-6](#) [A837D](#) [A862B1](#) [ACC730-8025B](#)