

AVH Series – Anti-Vandal High Current Pushbutton Switches

Applications

- Machinery.
- Automotive Electronics.
- Strict Access Control Systems.
- Shipping Equipment.
- Medical Equipment.
- Horticulture.
- Bath Accessories.



The AVH Series addresses high current applications. These high-quality Anti-Vandal switches are available in 19mm, 22mm and 25mm diameter bushings for a wide range of possible applications. In addition, AVH Series provide more options for operating, LED light types, light colors and LED voltages to fulfill the variety requirements.

The AVH Switches are characterised by contact rating of 16A, 26A/125, 250VAC.

Reference TE Customer Drawing for application instructions.

Features

AVH Series – Type Classification

•	High current,		
	16A & 26A are		
	available.		

- Flat Button
 Type.
- Momentary and Locking Actuation Available.
- Independent LED Control (7 color options).
- Bushing sizes,
 19, 22 & 25mm
 are available.
- UL Recognized.

Туре	AVH19	AVH22	AVH25	
Bushing Size	19mm	22mm	25mm	
Actuation	Actuation Momentary / Locking			
Rating	16A, 26A/ 125, 250VAC			
Contact Resistance	50mO Max			
Operation Temperature	-25°C to 85°C			
Mechanical Life	1,000,000 cycles, Momentary 500,000 cycles, Locking			
Electrical Life	50,000 cycles, 16A 10,000 cycles, 26A			
Sealing	Silicone			
Operation Force	3.5±1.5N			
Travel	3.2mm			
Ingress Protection	IP67, IK08			
Pollution Degree	2, Marco and Micro			

S

Document 2364568-0 Rev C Date: 10-FEB-2021 Dimensions in millimetres [Inch]


Dimensions Shown for reference purposes only. Specifications subject to change

For Email, phone or live chat, go to: www.te.com/help




Bushings Types:

19mm

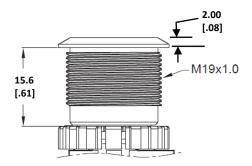


Panel Cut-out

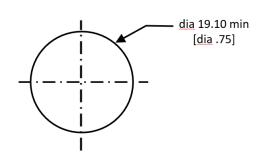


Panel Thickness: 10.0mm [.39] Maximum.

22mm




Panel Cut-out

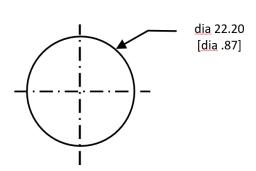


Panel Thickness: 10.0mm [.39] Maximum.

25mm

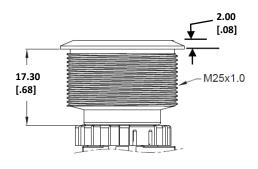

Panel Cut-out

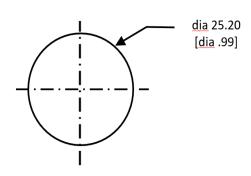

Panel Thickness: 10.0mm [.39] Maximum.

Document 2364568-0 Rev C

Date: 10-FEB-2021

Dimensions in millimetres [Inch]

Dimensions Shown for reference purposes only. Specifications subject to change


For Email, phone or live chat, go to: www.te.com/help




LED Light Types:


19mm

"O" Without LED





"P" Power Symbol



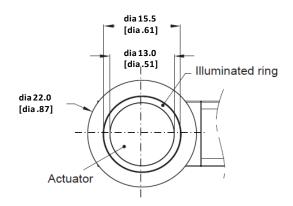


"E1" Ring + Power Symbol

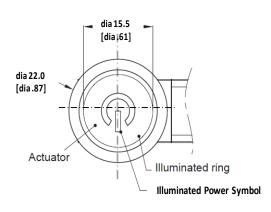

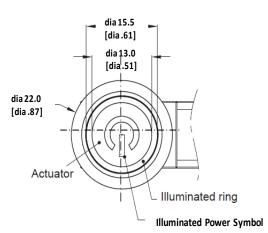


22mm


"O" Without LED



"R" Ring



"P" Power Symbol






25mm

dia 28.00 [dia 1.10]

"O" Without LED


dia 19.80 [dia .78]

dia 15.50 [dia .61]




"R" Ring


"P" Power Symbol




Terminal Types:

"16" #187 terminal, 16A

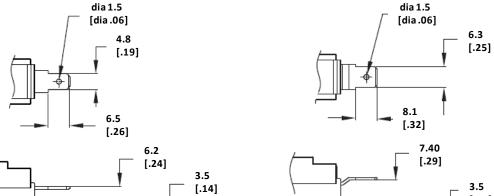

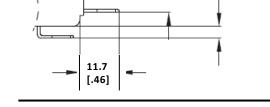



LED

"26" #250 terminal, 26A

Circuit Types:

No LED



Position 1

+ COM NO NC

Position 1


Document 2364568-0 Rev C Date: 10-FEB-2021 Dimensions in millimetres [Inch]

Dimensions Shown for reference purposes only. Specifications subject to change

For Email, phone or live chat, go to: www.te.com/help



Part numbering - How to order

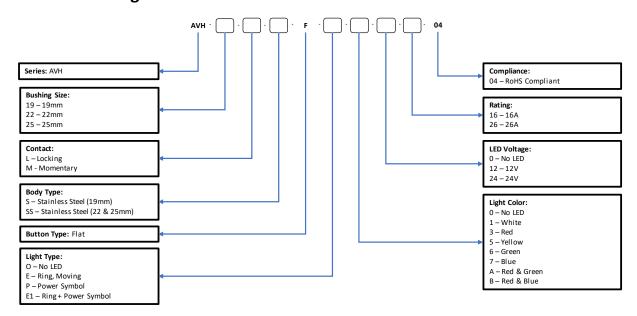

-Example PN: AVH19MSFE3122604

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Pushbutton Switches category:

Click to view products by TE Connectivity manufacturer:

Other Similar products are found below:

8971K1133 LW2L-M1C20M-A 67021K512 701PB580 7199K101 MML21EA2ADK MML21KA3ABK MML23KW3AA01W 8442K3
8450K1 860K11911T01A 861901 861K11911T01A07 861K13911 8646AB6X718UL 99-450.837 A2PMA1X03EC56 A3A-7310 A3A7340 1203A2UL ABGW410-R 1211390004 ABN111-Y ABN400-R 121382 1213C3 HE3B-M2 1211500044 121194 1232A6NF 121489
1223A2ULCSA D5P-MT4 13435AG 13445AD29GX768 AH165-2SGLG1TE3 AH165-TGFY22 AH165-TGLR11AA3 AH165-TL5Y22E
AH165-TLR11E AH165-TLS33E3 AH165-TLW22E3 AH16P-11 AH16P-2P3BX AH16P-TGFGX 14101AF1513 AL6H-M14-JW AL6H-M17-W DLA6A125V0C7F1 DLM5C125V0C9