





# 617-5000 MHZ VDP 5G/LTE CELLULAR, NB-IOT, CAT-M WIDEBAND FPC ANTENNAS

## FEATURES & BENEFITS

- North America Cellular world band coverage 617-5000 MHz for 5G, LTE, NB-IoT and Cat-M
- Dimensions: 100mm x 12mm
- Adhesive backing on the FPC simplifies mounting within the device
- Different cable length and connector options available
- RoHS 2.0 Compliant, REACH Compliant

## MATING COMPONENTS TO PART NUMBERS AND DIMENSIONS

PART NUMBER	CABLE LENGTH		CABLE O.D, MM	CONNECTOR TYPE (ON CABLE)	MATING COMPONENTS	
	MM	INCH			PART NUMBER	IMAGE
L000836-01	50	1.968	1.13	MHF-TYPE PLUG	RECEPTACLE (TE PN: 2337019-1)	
L000836-02	100.0	3.937	1.13	MHF-TYPE PLUG	RECEPTACLE (TE PN: 2337019-1)	
L000836-03	150.0	5.905	1.13	MHF-TYPE PLUG	RECEPTACLE (TE PN: 2337019-1)	
L000836-04	200.0	7.874	1.13	MHF-TYPE PLUG	RECEPTACLE (TE PN: 2337019-1)	
L000836-05	250.0	9.842	1.13	MHF-TYPE PLUG	RECEPTACLE (TE PN: 2337019-1)	
L000836-06	300.0	11.811	1.13	MHF-TYPE PLUG	RECEPTACLE (TE PN: 2337019-1)	
L000836-07	50.0	1.968	1.13	MHF4L-TYPE PLUG	RECEPTACLE (TE PN: 2334884-1)	
L000836-08	100.0	3.937	1.13	MHF4L-TYPE PLUG	RECEPTACLE (TE PN: 2334884-1)	
L000836-09	150.0	5.905	1.13	MHF4L-TYPE PLUG	RECEPTACLE (TE PN: 2334884-1)	
L000836-10	200.0	7.874	1.13	MHF4L-TYPE PLUG	RECEPTACLE (TE PN: 2334884-1)	
L000836-11	250.0	9.842	1.13	MHF4L-TYPE PLUG	RECEPTACLE (TE PN: 2334884-1)	
L000836-12	300.0	11.811	1.13	MHF4L-TYPE PLUG	RECEPTACLE (TE PN: 2334884-1)	

# 617-5000 MHZ VDP 5G/LTE CELLULAR, NB-IOT, CAT-M WIDEBAND FPC ANTENNAS

Standard Antenna Solutions

## SPECIFICATIONS

<b>Power Handling</b>	10 Watt cw
<b>Feed Point Impedance</b>	50 ohms
<b>Polarization</b>	Linear
<b>Size</b>	100.0 mm x 15.0 mm x 0.15 mm (FPCB + adhesive) (with cable solder)
<b>Weight</b>	< 2.0 g
<b>Mounting</b>	Adhesive Tape
<b>Mating Connectors</b>	MHF and MHF4L type, Refer to page 12
<b>Cable</b>	1.13mm Dia., Refer to page 12
<b>Operating Temperature</b>	-40 to +85°C
<b>Storage Temperature</b>	-40 to +85°C
<b>Hazardous Materials</b>	A certificate of conformance is available from the product page on TE website

## ANTENNA RF SPECIFICATIONS WITH DIFFERENT CABLE ASSEMBLIES

P/N	Cable Length	Connector	Cable OD	RF DATA	Frequency Range (MHz)						
					617-894	1710-2200	2305-2360	2496-2690	3300-3800	3800-4200	4400-5000
<b>L000836-01</b>	<b>50 mm</b>	<b>MHF</b>	<b>1.13 mm</b>	VSWR	< 2.2 :1	< 2.6 :1	< 2.5 :1	< 2.0 :1	< 2.5 :1	<2.6 :1	<2.5 :1
				Avg. Efficiency	49.3 %	54.25%	47.9 %	65.2 %	56 %	60.5 %	48.5 %
				Peak Gain (Max)	1.17 dBi	2.31 dBi	1.56 dBi	3.11 dBi	3.64 dBi	3.51 dBi	3.45 dBi
				Average Gain	-3.07 dB	-2.66 dBi	-3.2 dB	-1.9 dB	-2.5 dB	-2.2 dB	-3.2 dB
<b>L000836-02</b>	<b>100 mm</b>	<b>MHF</b>	<b>1.13 mm</b>	VSWR	< 2.7 :1	< 2.7 :1	<2.0 :1	< 1.9 :1	< 2.2 :1	<2.6 :1	<2.9 :1
				Avg. Efficiency	43 %	54 %	55 %	64 %	53 %	56 %	48 %
				Peak Gain (Max)	0.6 dBi	3.1 dBi	3.4 dBi	3.0 dBi	2.7 dBi	3.4 dBi	3.6 dBi
				Average Gain	-3.5 dB	-2.7 dB	-2.6 dB	-2.0 dB	-2.8 dB	-2.5 dB	-3.3 dB
<b>L000836-03</b>	<b>150 mm</b>	<b>MHF</b>	<b>1.13 mm</b>	VSWR	<2.65 :1	< 2.8 :1	<2.2 :1	< 2.0 :1	< 2.5 :1	<2.3 :1	<3.0 :1
				Avg. Efficiency	53.6 %	51.2 %	59.5 %	57.2 %	47.7 %	54.5 %	40.1 %
				Peak Gain (Max)	1.24 dBi	2.16 dBi	3.93 dBi	2.53 dBi	2.87 dBi	2.62 dBi	2.27 dBi
				Average Gain	-2.81 dB	-2.92 dB	-2.26 dB	-2.43 dB	-3.22 dB	-2.65 dB	-3.96 dB
<b>L000836-04</b>	<b>200 mm</b>	<b>MHF</b>	<b>1.13 mm</b>	VSWR	< 1.8 :1	2.6 :1	< 2.2 :1	< 2.0 :1	< 2.6 :1	<2.4 :1	<2.2 :1
				Avg. Efficiency	54.6 %	50.7 %	55 %	53.3 %	45.9 %	52.7 %	41 %
				Peak Gain (Max)	1.37 dBi	2.51 dBi	2.74 dBi	3.01 dBi	2.61 dBi	2.91 dBi	3.63 dBi
				Average Gain	-2.67 dB	-2.96 dB	-2.6 dB	-2.75 dB	-3.39 dB	-2.79 dB	-3.98 dB

## CABLE LOSS

OD 1.37mm (P/N: 2-2108921)

Freq. Range (MHz)	617-960	1427-1517	1690-2400	2496-2690	3300-3800	3800-4200	4400-5000
<b>Cable attenuation (dB/m)</b>	< 1.9	<2.25	< 2.75	< 3.0	<3.5	< 3.8	< 4.0

## ANTENNA RF SPECIFICATIONS WITH DIFFERENT CABLE ASSEMBLIES

P/N	RF DATA	Frequency Range (MHz)						
		617-894	1710-2200	2305-2360	2496-2690	3300-3800	3800-4200	4400-5000
<b>L000836-05</b>	VSWR	< 2.2 :1	< 2.0 :1	< 2.2 :1	< 1.8 :1	< 2.1 :1	<2.1 :1	<2.7 :1
<b>50 mm</b>	Avg. Efficiency	44.7 %	51.4%	50.7 %	54.3 %	42.2 %	46.5 %	34.9 %
<b>MHF</b>	Peak Gain (Max)	1.14 dBi	3.23 dBi	3.19 dBi	4.32 dBi	2.93 dBi	2.95 dBi	1.87 dBi
<b>1.13 mm</b>	Average Gain	-3.5 dB	-2.9 dB	-2.95 dB	-2.6 dB	-3.77 dB	-3.3 dB	-4.6 dB
<b>L000836-06</b>	VSWR	< 2.5 :1	< 2.2 :1	<2.1 :1	< 1.8 :1	< 2.1 :1	<2.1 :1	<2.6 :1
<b>100 mm</b>	Avg. Efficiency	43.8 %	49.7 %	54.9 %	55.7 %	41.2 %	46.6%	33.5%
<b>MHF</b>	Peak Gain (Max)	0.7 dBi	3 dBi	4.5 dBi	4.2 dBi	2.2 dBi	2.7 dBi	2.4 dBi
<b>1.13 mm</b>	Average Gain	-3.6dB	-3.0dB	-2.6dB	-2.5dB	-3.8dB	-3.3dB	-4.9dB
<b>L000836-07</b>	VSWR	< 2.2 :1	< 2.6 :1	< 2.5 :1	< 2.0 :1	< 2.5 :1	<2.6 :1	<2.5 :1
<b>150 mm</b>	Avg. Efficiency	49.3 %	54.25%	47.9 %	65.2 %	56 %	60.5 %	48.5 %
<b>MHF</b>	Peak Gain (Max)	1.17 dBi	2.31 dBi	1.56 dBi	3.11 dBi	3.64 dBi	3.51 dBi	3.45 dBi
<b>1.13 mm</b>	Average Gain	-3.07 dB	-2.66 dB	-3.2 dB	-1.9 dB	-2.5 dB	-2.2 dB	-3.2 dB
<b>L000836-08</b>	VSWR	< 2.7 :1	< 2.7 :1	<2.0 :1	< 1.9 :1	< 2.2 :1	<2.6 :1	<2.9 :1
<b>200 mm</b>	Avg. Efficiency	43 %	54 %	55 %	64 %	53 %	56%	48%
<b>MHF</b>	Peak Gain (Max)	0.6 dBi	3.1 dBi	3.4 dBi	3.0 dBi	2.7 dBi	3.4 dBi	3.6 dBi
<b>1.13 mm</b>	Average Gain	-3.5 dB	-2.7 dB	-2.6 dB	-2.0 dB	-2.8 dB	-2.5 dB	-3.3 dB

## CABLE LOSS

OD 1.37mm (P/N: 2-2108921)

Freq. Range (MHz)	617-960	1427-1517	1690-2400	2496-2690	3300-3800	3800-4200	4400-5000
Cable attenuation (dB/m)	< 1.9	<2.25	< 2.75	< 3.0	<3.5	< 3.8	< 4.0

**ANTENNA RF SPECIFICATIONS WITH DIFFERENT CABLE ASSEMBLIES**

P/N	RF DATA	Frequency Range (MHz)						
		617-894	1710-2200	2305-2360	2496-2690	3300-3800	3800-4200	4400-5000
<b>L000836-09</b>	VSWR	<2.65 :1	< 2.8 :1	<2.2 :1	< 2.0 :1	< 2.5 :1	<2.3 :1	<3.0 :1
<b>150 mm</b>	Avg. Efficiency	53.6 %	51.2 %	59.5 %	57.2 %	47.7 %	54.5 %	40.1 %
<b>MHF4L</b>	Peak Gain (Max)	1.24 dBi	2.16 dBi	3.93 dBi	2.53 dBi	2.87 dBi	2.62 dBi	2.27 dBi
<b>1.13 mm</b>	Average Gain	-2.81 dB	-2.92 dB	-2.26 dB	-2.43 dB	-3.22 dB	-2.65 dB	-3.96 dB
<b>L000836-10</b>	VSWR	< 1.8 :1	< 2.6 :1	< 2.2 :1	< 2.0 :1	< 2.6 :1	<2.4 :1	<2.2 :1
<b>200 mm</b>	Avg. Efficiency	54.6 %	50.7 %	55 %	53.3 %	45.9 %	52.7 %	41 %
<b>MHF4L</b>	Peak Gain (Max)	1.37 dBi	2.51 dBi	2.74 dBi	3.01 dBi	2.61 dBi	2.91 dBi	3.63 dBi
<b>1.13 mm</b>	Average Gain	-2.67 dB	-2.96 dB	-2.6 dB	-2.75 dB	-3.39 dB	-2.79 dB	-3.98 dB
<b>L000836-11</b>	VSWR	< 2.2 :1	< 2.0 :1	< 2.2 :1	< 1.8 :1	< 2.1 :1	<2.1 :1	<2.7 :1
<b>150 mm</b>	Avg. Efficiency	44.7 %	51.4%	50.7 %	54.3 %	42.2 %	46.5 %	34.9 %
<b>MHF4L</b>	Peak Gain (Max)	1.14 dBi	3.23 dBi	3.19 dBi	4.32 dBi	2.93 dBi	2.95 dBi	1.87 dBi
<b>1.13 mm</b>	Average Gain	-3.5 dB	-2.9 dB	-2.95 dB	-2.6 dB	-3.77 dB	-3.3 dB	-4.6 dB
<b>L000836-12</b>	VSWR	< 2.5 :1	< 2.2 :1	<2.1 :1	< 1.8 :1	< 2.1 :1	<2.1 :1	<2.6 :1
<b>200 mm</b>	Avg. Efficiency	43.8 %	49.7 %	54.9 %	55.7 %	41.2 %	46.6%	33.5%
<b>MHF4L</b>	Peak Gain (Max)	0.7 dBi	3 dBi	4.5 dBi	4.2 dBi	2.2 dBi	2.7 dBi	2.4 dBi
<b>1.13 mm</b>	Average Gain	-3.6dB	-3.0dB	-2.6dB	-2.5dB	-3.8dB	-3.3dB	-4.9dB


**CABLE LOSS**
**OD 1.13mm (P/N: 3-2108921)**

Freq. Range (MHz)	617-960	1427-1517	1690-2400	2496-2690	3300-3800	3800-4200	4400-5000
Cable attenuation (dB/m)	< 2.2	<2.9	< 3.69	< 4.0	<4.5	< 4.7	< 5.0


**RF DATA**

(Shown as L000836-02 : Others can vary with different cable lengths.)


**VSWR**

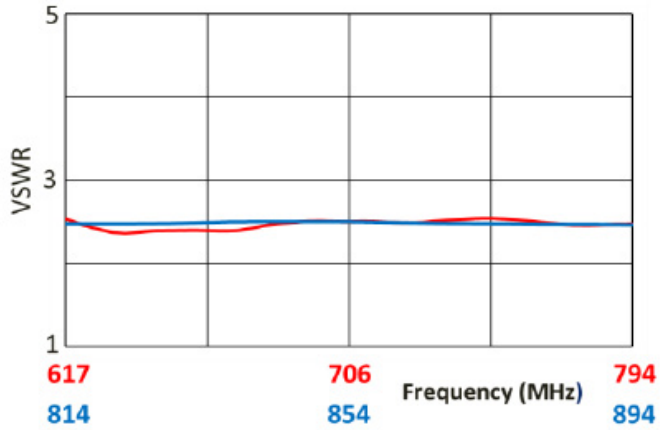


**Return Loss**

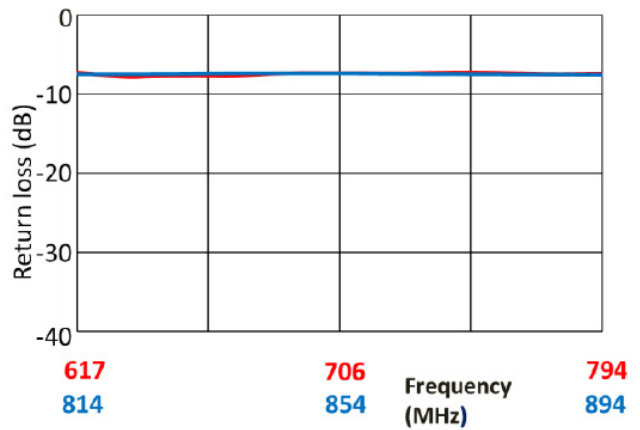

**Peak Gain**

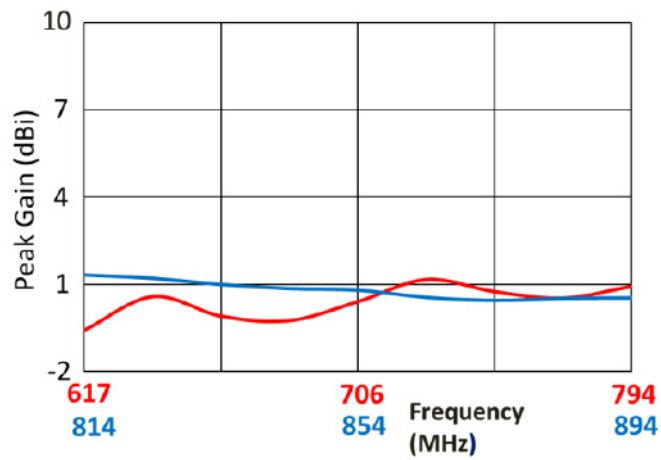

**Efficiency**

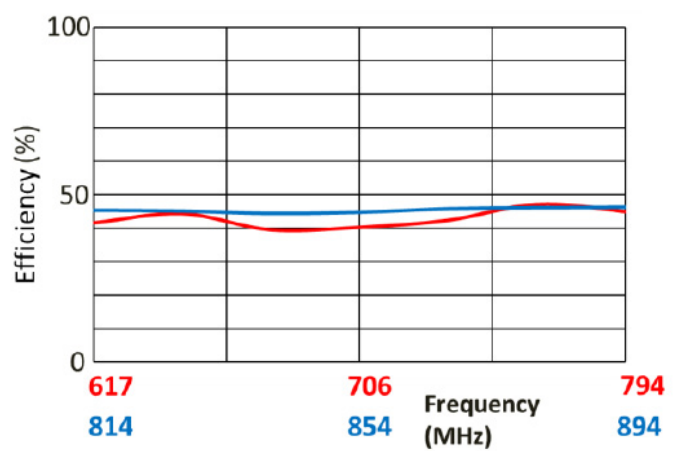


Data measured in free space and on 150 x 150 x 2.0 mm PC plastic


**RF DATA**

(Shown as L000836-02 : Others can vary with different cable lengths.)


**VSWR**

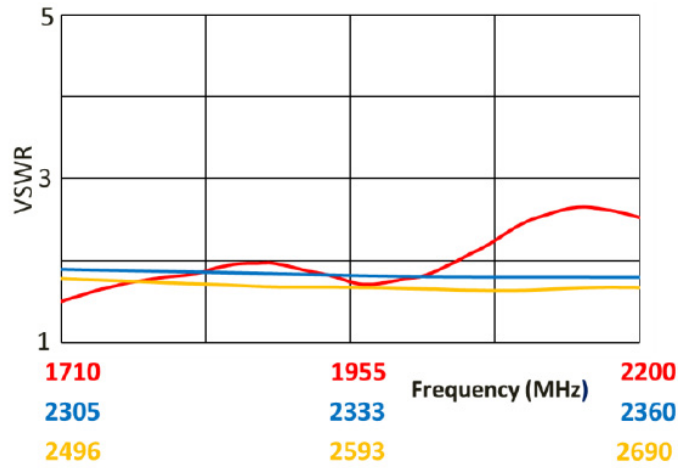


**Return Loss**

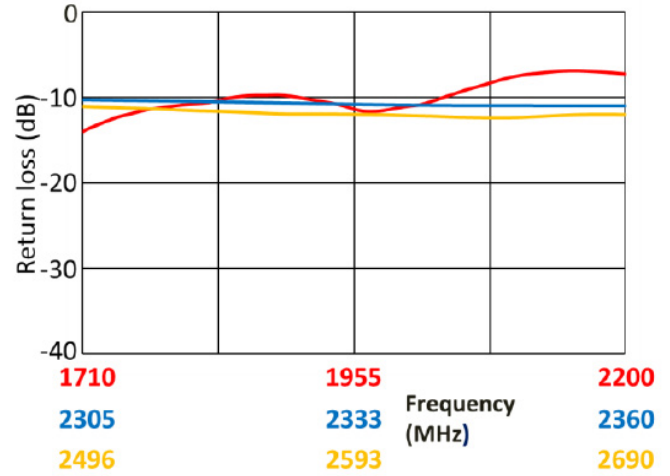

**Peak Gain**

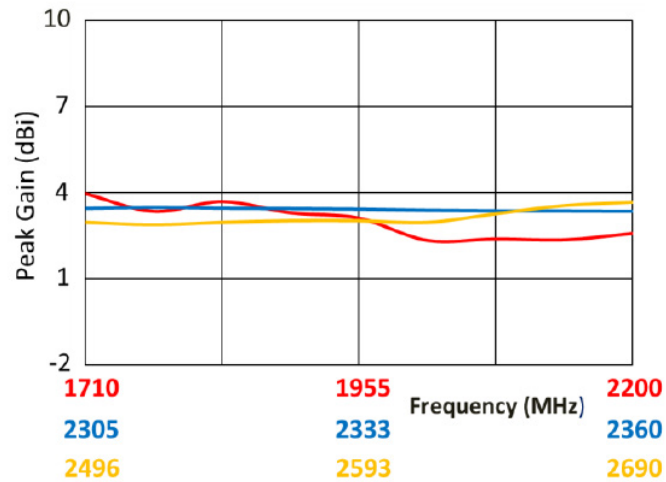

**Efficiency**

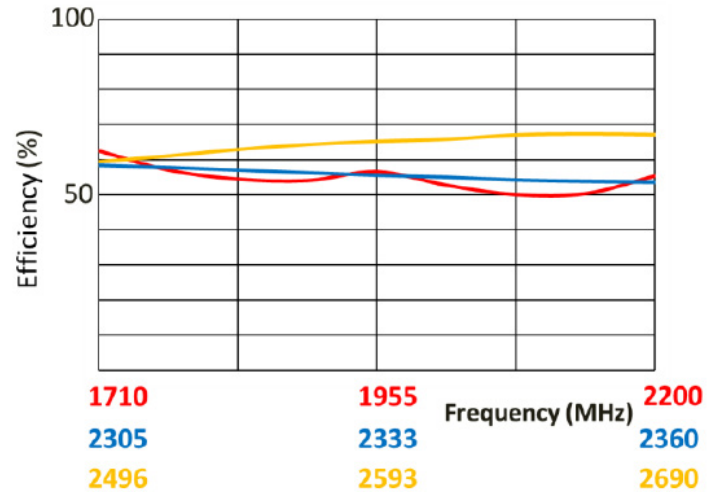


Data measured in free space and on 150 x 150 x 2.0 mm PC plastic


**RF DATA**

(Shown as L000836-02 : Others can vary with different cable lengths.)


**VSWR**

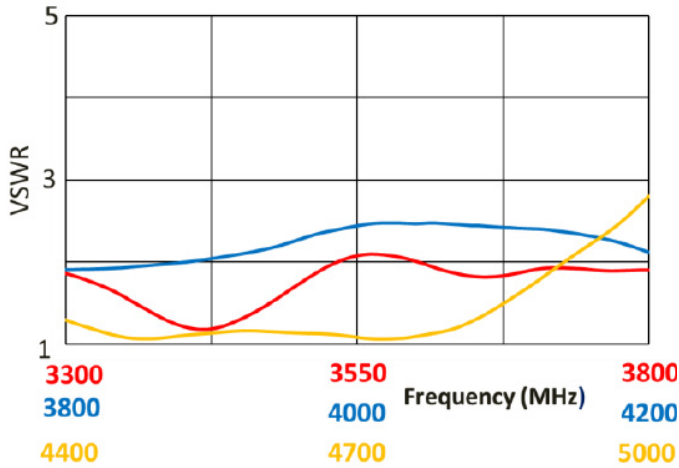


**Return Loss**

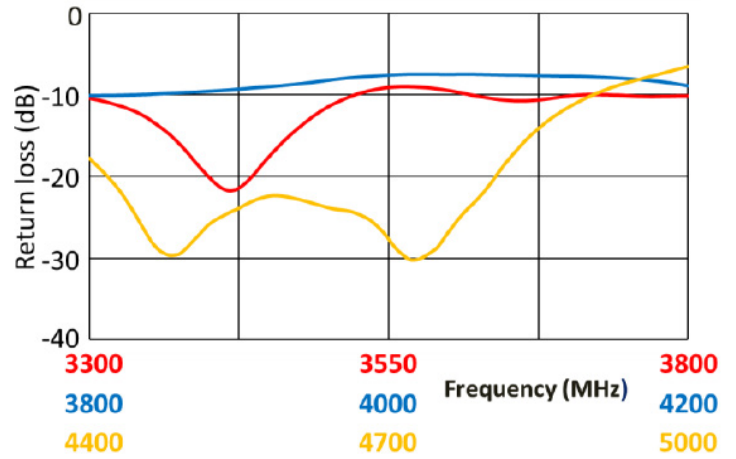

**Peak Gain**

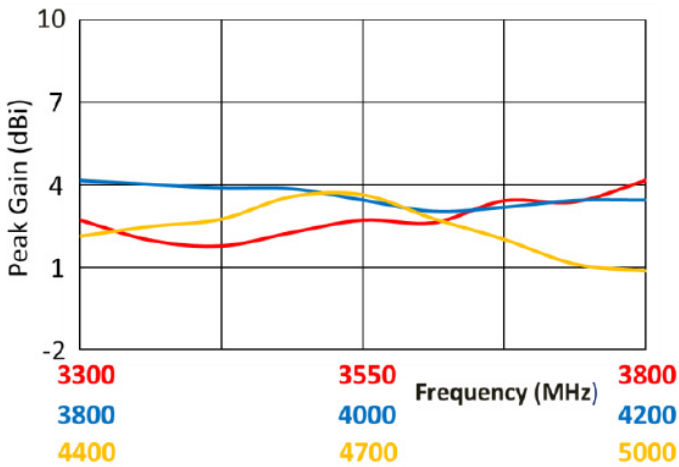

**Efficiency**

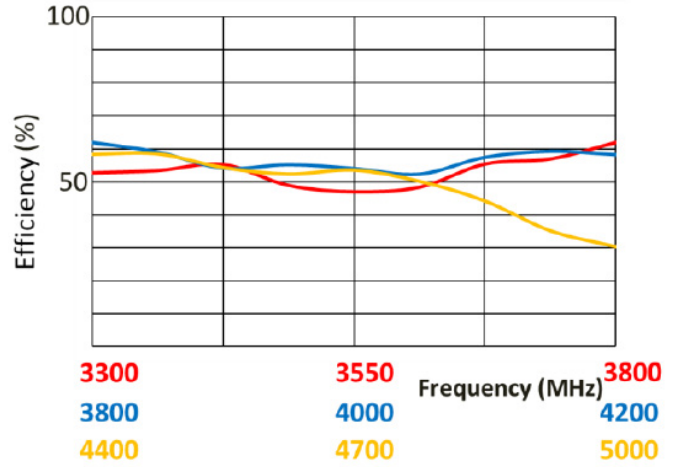


Data measured in free space and on 150 x 150 x 2.0 mm PC plastic


## RADIATION PATTERN

(Shown as L000836-02 : Others can vary with different cable lengths.)


### Test setup

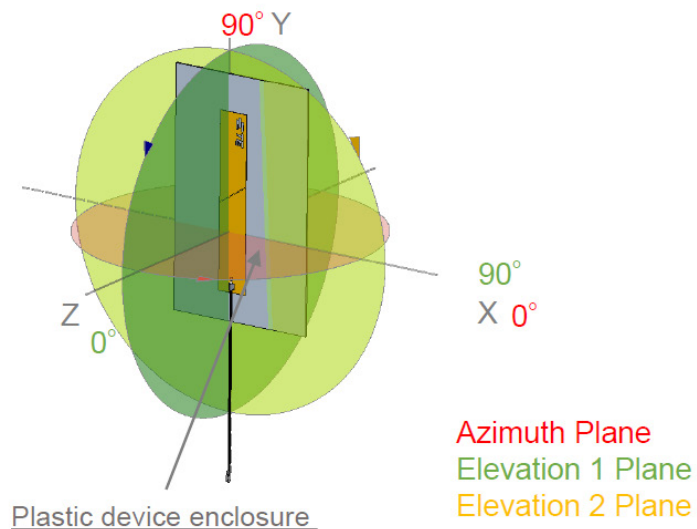


### Azimuth(XY)

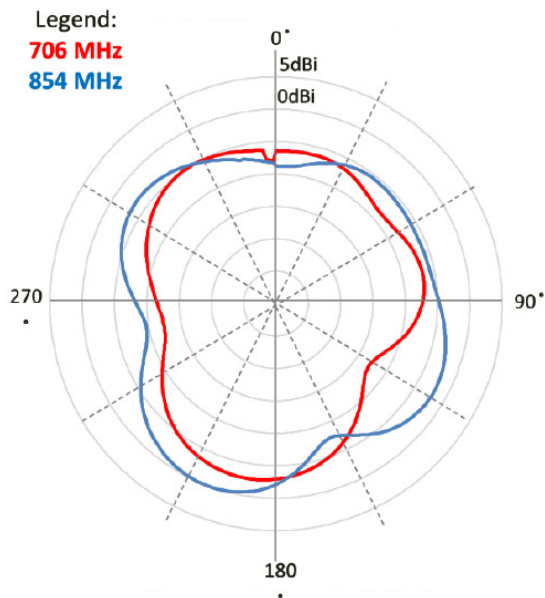

### Elevation 1(XZ)

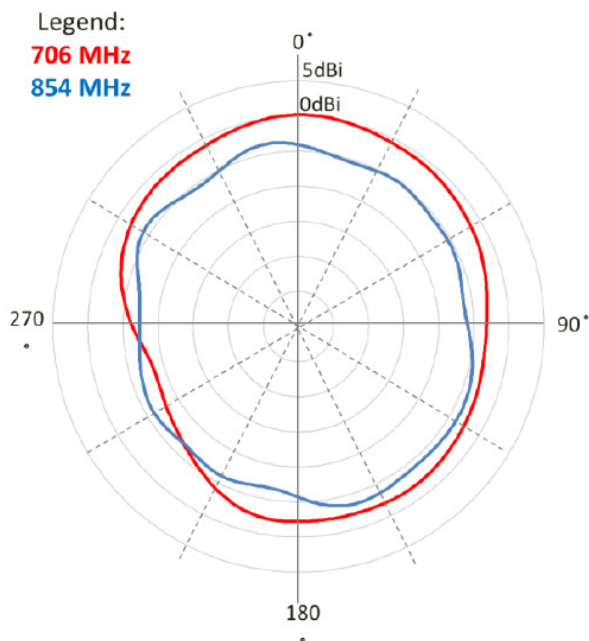

### Elevation 2(YZ)

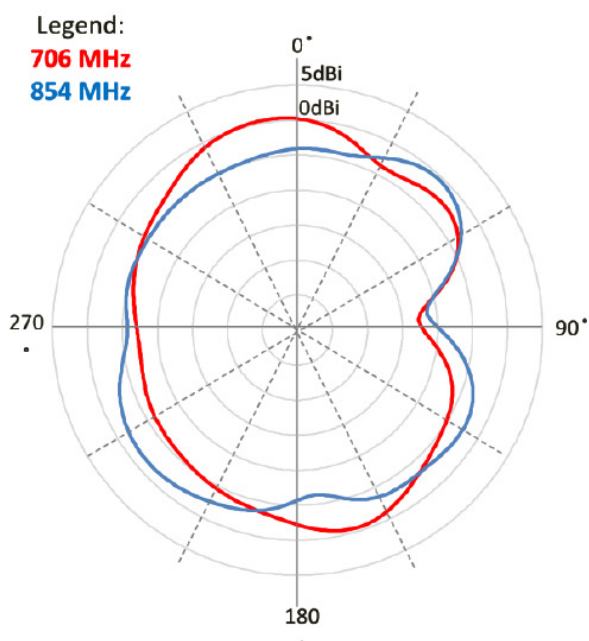


Data measured in free space and on 150 x 150 x 2.0 mm PC plastic


**RADIATION PATTERN**

(Shown as L000836-02 : Others can vary with different cable lengths.)


**Test setup**

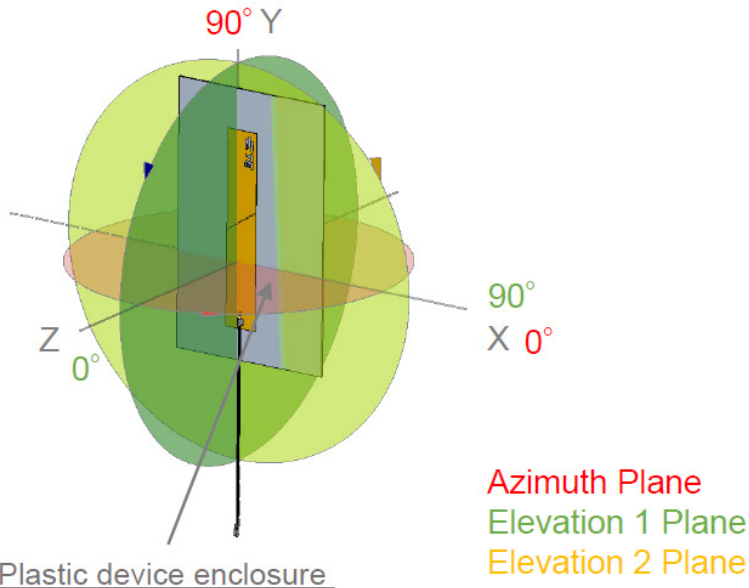


**Azimuth(XY)**

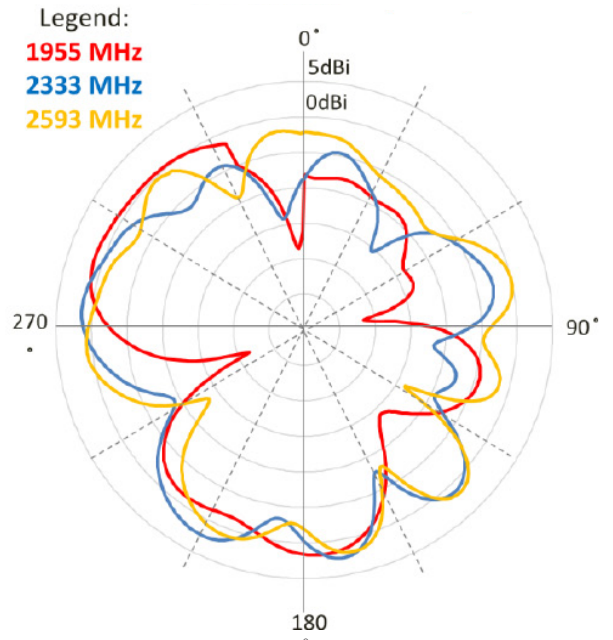

**Elevation 1(XZ)**

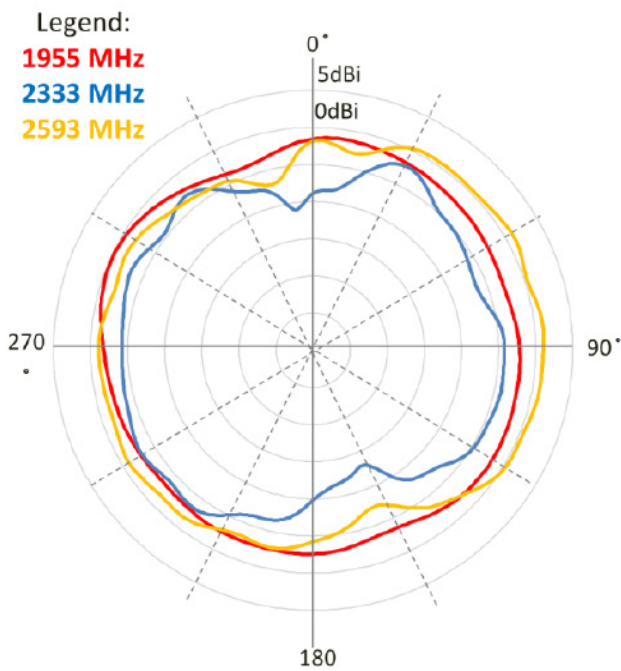

**Elevation 2(YZ)**

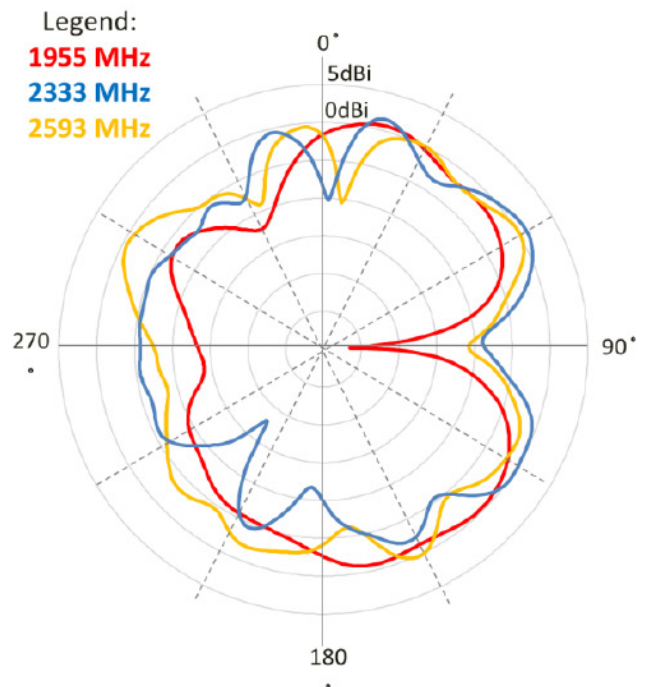


Data measured in free space and on 150 x 150 x 2.0 mm PC plastic


### RADIATION PATTERN

(Shown as L000836-02 : Others can vary with different cable lengths.)


#### Test setup

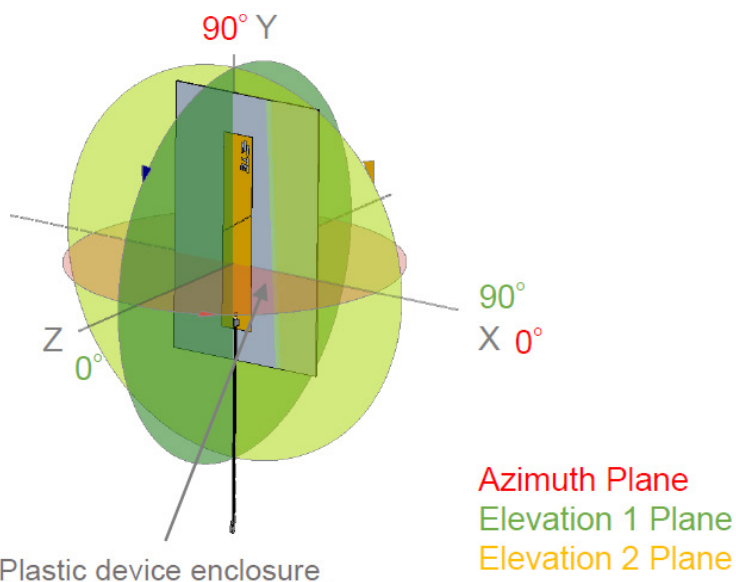


#### Azimuth(XY)

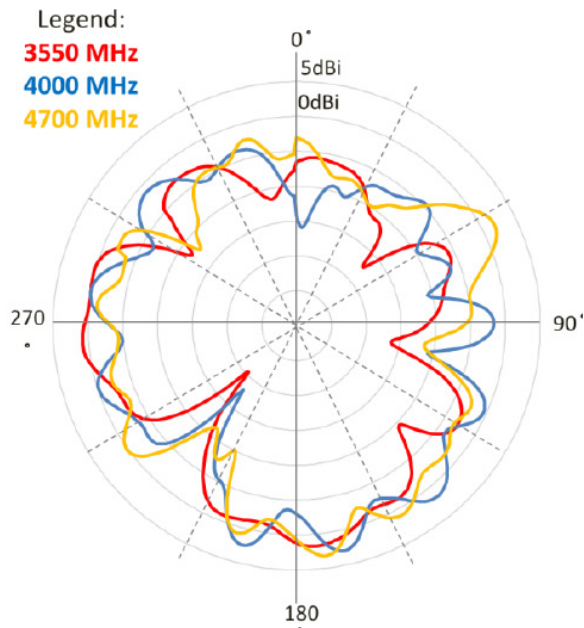

#### Elevation 1(XZ)

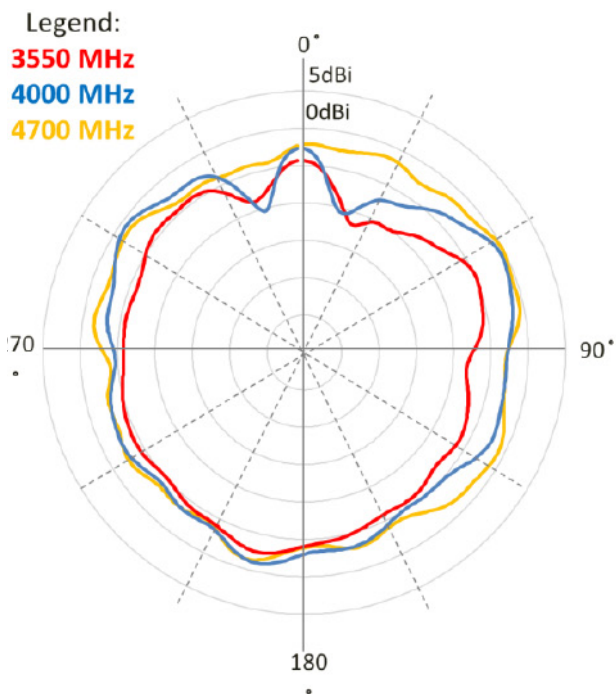


#### Elevation 2(YZ)

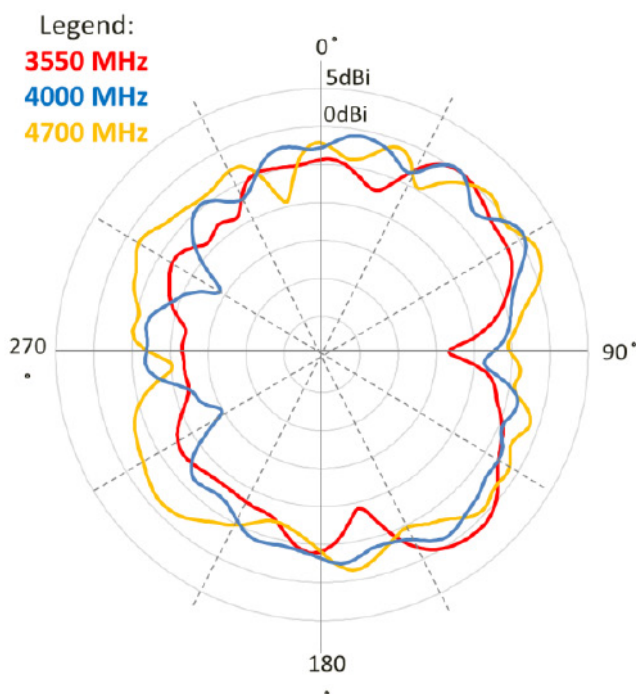

Data measured in free space and on 150 x 150 x 2.0 mm PC plastic

**KEEP OUT AREA**

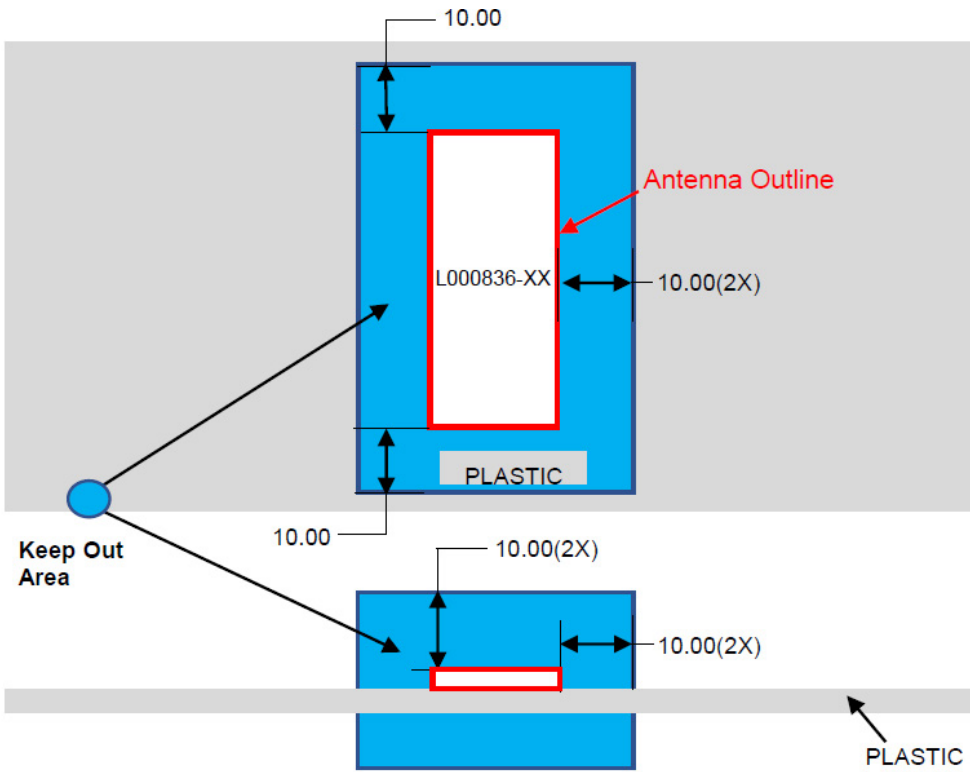


**NOTES**

1. Antenna designed to be mounted on plastic cover.
2. Area in blue indicates Keep Out Area.
3. Contact TE if keep out zone cannot be guaranteed.

Dimension: mm  
Diagram is not to scale

**DIMENSIONS**

(Refer to Page 12 for dimensions A and B)

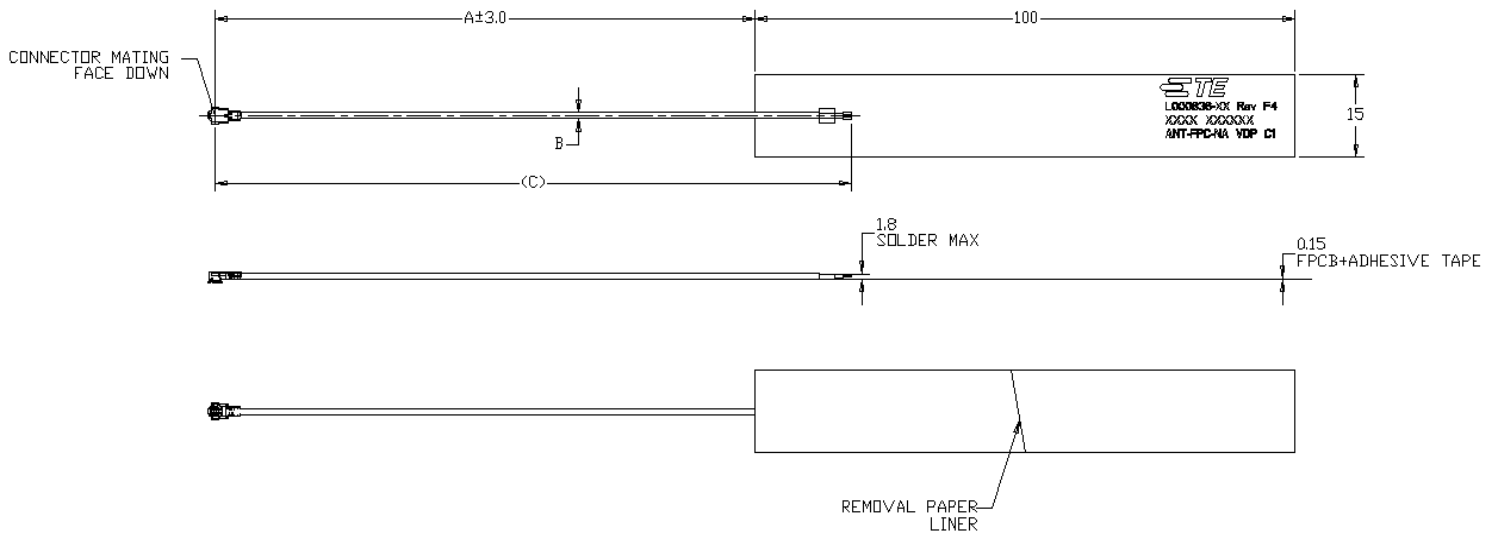


Dimension: mm  
Diagram is not to scale

# 617-5000 MHZ VDP 5G/LTE CELLULAR, NB-IOT, CAT-M WIDEBAND FPC ANTENNAS

Standard Antenna Solutions

## PACKAGING

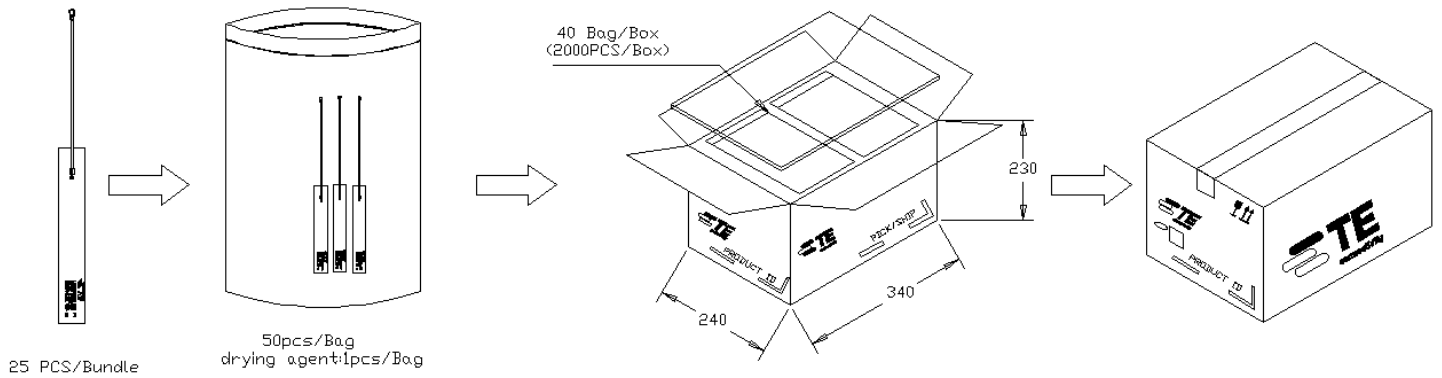

## TE TECHNICAL SUPPORT CENTER

USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222

Mexico: +52 (0) 55-1106-0800

Latin/S. America: +54 (0) 11-4733-2200

Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666

France: +33 (0) 1-3420-8686

Netherlands: +31 (0) 73-6246-999

China: +86 (0) 400-820-6015

For phone numbers in other countries, go to [te.com/support-center](http://te.com/support-center)

## te.com

TE, TE Connectivity, TE connectivity (logo) are trademarks owned or licensed by the TE Connectivity plc family of companies. Other product names, logos, and company names mentioned herein may be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application. Antenna performance may vary. TE is a component manufacturer, and customer and/or end-user is responsible for all end-use compliance and regulatory requirements.

©2025 TE Connectivity. All Rights Reserved.

02-25

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Antennas](#) category:*

*Click to view products by [TE Connectivity](#) manufacturer:*

Other Similar products are found below :

[930-033-R](#) [108-00014-50](#) [66089-2406](#) [A09-F8NF-M](#) [RGFRA1903041A1T](#) [108-00016-050](#) [W1049B090](#) [WTL2449CQ1-FRSMM](#) [CPL9C](#)  
[0600-00060](#) [PAL90209H-FNF](#) [GD53-25](#) [S9025PLSMF](#) [GPSCPMM00](#) [ANTDOM-05-01-WPM](#) [ANT-WP868SMA-Y](#) [CBNC58](#) [MD10-004](#)  
[ABFT](#) [LP800NMOW](#) [NMOQ88C](#) [NMOQB](#) [NMOQC](#) [ANT-GSMGPSPUKS](#) [60210](#) [60140](#) [ANT-8WPIG-UFL](#) [ANT-GPSPUKS](#) [A21H0](#)  
[29000863](#) [29000848](#) [955179003](#) [22100003](#) [DL-T022-2.4G](#) [DL-T023-4G](#) [T1-915M](#) [DL-T021-2.4GW](#) [DL-T021-2.4G](#) [KH-IPEX-1.13](#)  
[BWGNXCX16-6B1Y2L120](#) [BWGNXCX15-15B1Y4L120](#) [DL-T023-4GW](#) [J008-GSM](#) [3N0401LG-021](#) [KHA\(RG1.13\)-TX90B-IPEX](#) [KH-](#)  
[GPS181804-WY](#) [KHA\(RG1.13\)-TX80B-IPEX](#) [TX5800-JZ-5](#) [KH-137-TX90B-IPEX4](#) [KH-113-TX100B-IPEX4](#)