
CUSTOMER DRAWING

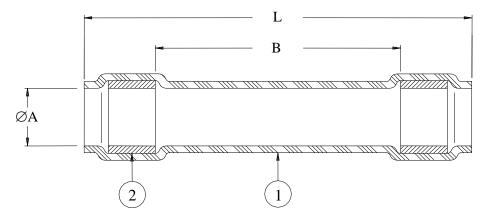

	Product Dimensions			
Part Description	L	В	ØA	
	Max	Ref	Min	
DT 555 3/0 3 75 A360 0	69.9	25.4	8.9	
RT-555-3/8-2.75-A260-0	(2.75)	(1.00)	(0.35)	
RT-555-3/8-4.75-A260-0	120.7	76.2	8.9	
K1-555-5/6-4.75-A260-0	(4.75)	(3.00)	(0.35)	
RT-555-1/2-2.75-A260-0	69.9	25.4	12.7	
K1-333-1/2-2.73-A200-0	(2.75)	(1.00)	(0.50)	
RT-555-1/2-5.75-A260-0	146.1	101.6	12.7	
K1-333-1/2-3.73-A200-0	(5.75)	(4.00)	(0.50)	
RT-555-3/4-3.00-A260-0	76.2	31.8	18.3	
K1-333-3/4-3.00-A200-0	(3.00)	(1.25)	(0.72)	
RT-555-3/4-4.75-A260-0	120.6	76.2	18.3	
1(1-555-5/4-4.75-A200-0	(4.75)	(3.00)	(0.72)	
RT-555-3/4-6.75-A260-0	171.5	127.0	18.3	
1(1-555-5/4-0.75-A200-0	(6.75)	(5.00)	(0.72)	
RT-555-1.0-3.75-A260-0	95.3	50.8	22.8	
K1-555-1.0-5.75-A200-0	(3.75)	(2.00)	(0.90)	
RT-555-1.0-4.75-A260-0	120.6	76.2	22.8	
1 1 - 555 - 1.0-4.75 - A200-0	(4.75)	(3.00)	(0.90)	
RT-555-1.0-6.75-A260-0	171.5	127.0	22.8	
K1-333-1.0-0.75-A260-0	(6.75)	(5.00)	(0.90)	

MATERIALS

- 1. INSULATION SLEEVE: Heat-shrinkable, radiation cross-linked modified fluoropolymer. Color: Black.
- 2. MELTABLE INSERT: Environment resistant modified thermoplastic fluoroelastomer. Color: Light Blue

APPLICATION

- 1. This part is designed to provide an immersion resistant seal on wires having insulation diameters as specified on table and temperature rating of at least +150°C (302°F).
- 2. Temperature range: -65°C to +200°C (-85°F to +392°F).

 Maximum temperature of 260°C (500°F) when exposed for 500 continuous hours.

TE Connectivity			TITLE: SEALING SLEEVE			
Unless otherwise specified dimensions are in millimeters. [Inches dimensions are shown in brackets] DIMENSIONING AND TOLERANCING PER ASME Y14.5-2009 Raychem Molded Parts		DOCUMENT NO.: RT-555-X/X-YYY-A260-0				
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A ROUGHNESS IN MICRON			rev: E	DATE: August 3, 2012	
PREPARED BY: RODRIGUEZ	CAGE CODE: 06090	ECO NUMBI ECO	ER: -12-014108	SCALE: NTS	SIZE:	SHEET: 1 of 1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Heat Shrink Tubing and Sleeves category:

Click to view products by TE Connectivity manufacturer:

Other Similar products are found below:

5685710001 CR9960-000 5734012004 607381P039 611112-000 6284592002 CX4711-000 CZ1420-000 D-306-38 770-006S302 770-010Y106W1 770-018S103 770-018S202W1 770-018S205W1 770-020S704W1 770-020S705 MFP-3/64"-Clear 790-3012 MHHT-4-15K2-G-104 8003012003 MIL-LT-1-1/2-4-SP MIL-LT-1-1/2-9-STK MIL-LT-1/2-2-STK MIL-LT-3-0-SP MIL-LT-3/32-0-SP MIL-LT-3/32-6-SP MIL-LT-3/4-4-STK MIL-LT-3/4-6-SP 839602-000 8423-6 FP301-116-48"-Clear FP301-12-6"-Clear FP301-1/4-48"-White-Hdr FP301-18-48"-Black-Hdr FP301-1/8-6"-Black FP301-18-6"-Black-Bulk FP301-316-48"-Blue-Hdr 912229N002 R280637030 HDCW-5515-1000 HDT-0300-48A-BLACK HDT-0400-48A-Black HDT-0800-48A-RED HDT1100-48A-BLK HDT1500-48A-BLK HDT-2000-48A-Black RHW-70/20-1200/ADH-0 DWP-125-0.450-4-55MM-CS879 156082-000 MT5500-3/8-X-SP