



TSF000

LOW PROFILE POE+ SWITCH



Retail



Smart city



Energy & utilities



Industrial & automation

POWER & CONNECT WITH POE+

Deliver power and data for up to 4 devices with 120W power budget

LOW-PROFILE INDUSTRIAL FIT

Flat housing with DIN rail mount for effortless installation

5 X ETHERNET

Front access Ethernet with extremely compact form factor

FLEXIBLE POWER INPUT

7 – 57 VDC for compatibility with diverse industrial systems

Ethernet

Ethernet	5 x ETH ports, 10/100 Mbps, supports auto MDI/MDIX crossover
IEEE 802.3 series standards	802.3i, 802.3u, 802.3x, 802.3az, 802.3p 802.3Q

INDUSTRIAL PROTOCOLS

Profinet	Profinet Class A conformance (available with optional order code)
----------	---

POE OUT

PoE ports	Port 1- 4
PoE standards	IEEE 802.3af (PoE, Type 1) and IEEE 802.3at (PoE+, Type 2), Alternative A
PoE Max Power per Port (at PSE)	30 W
Total PoE Power Budget (at PSE)	120 W

Performance Specifications

Bandwidth (Non-blocking)	10 Gbps
Packer buffer	128 KB
MAC address table size	2K entries
Jumbo frame support	9216 bytes

Power

Connector	3-pin industrial DC power socket
Input voltage range	7 – 57 VDC, overvoltage protection: 60 Vmax, reverse polarity protection: 80 Vmax, surge protection: min 64.4V/max 71.2V breakdown voltage, 93.6V maximum reverse voltage @4.3A maximum reverse surge current
PoE-Out input voltage range	44 - 57 VDC
Power consumption	Idle: 1 W / Max: 1.5 W / PoE Max: 121 W

Physical Interfaces

Ethernet	5 x RJ45 ports, 10/100 Mbps
Status LEDs	1 x Power LED, 10 x ETH status LEDs
Power	1 x 3-pin industrial DC power socket
Grounding	Grounding terminal on power connector

Physical Specification

Casing material	Anodized aluminum housing and panels
Dimensions (W x H x D)	113 x 28 x 50 mm
Weight	142 g
Mounting options	Integrated DIN rail bracket

Operating Environment


Operating temperature	-40 °C to 75 °C
Operating humidity	5% to 95% non-condensing
Ingress Protection Rating	IP30

Regulatory & Type Approvals


Regulatory	CE, UKCA, WEEE
------------	----------------

Hardware


FRONT VIEW

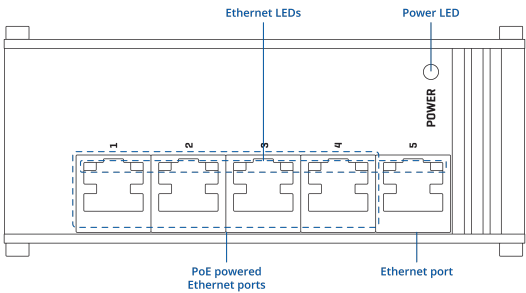

BACK VIEW

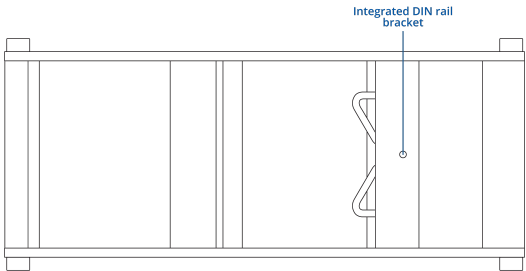

POWER CONNECTOR



Ordering

Standard package*



3-PIN POWER CONNECTOR



TSF000



QUICK START GUIDE

*Standard package contents may differ based on standard order codes.

For more information on all available packaging options – please [contact us](#) directly.

Classification codes

HS Code: 851762
HTS: 8517.62.00

Available versions

TSF000 *****	N/A	TSF000000000 / Standard package without PSU
--------------	-----	---

TSF000 spatial measurements


Available versions

Box (W x H x D):	113 x 28 x 50 mm
Device housing (W x H x D)*	140 x 32 x 55 mm

*Housing measurements are presented without antenna connectors and screws; for measurements of other device elements look to the sections below


TOP VIEW

The figure below depicts the measurements of device and its components as seen from the top:




FRONT VIEW

The figure below depicts the measurements of device and its components as seen from the front panel side:

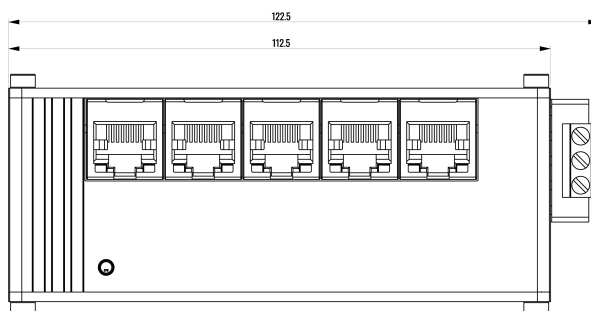


REAR VIEW

The figure below depicts the measurements of device and its components as seen from the back panel side:

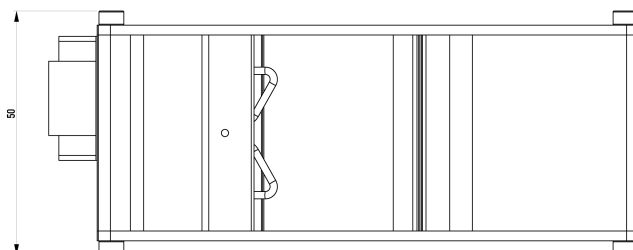


LEFT VIEW

The figure below depicts the measurements of device and its components as seen from the left:

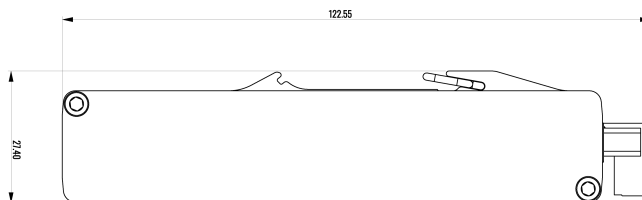

MOUNTING SPACE REQUIREMENTS

The figure below depicts an approximation of the device's dimensions when cables and antennas are attached:

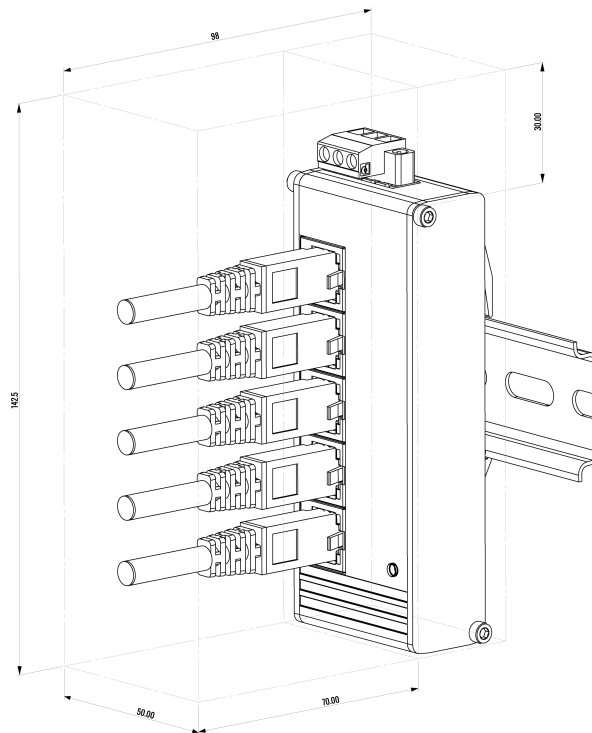

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Unmanaged Ethernet Switches](#) category:

Click to view products by [Teltonika](#) manufacturer:

Other Similar products are found below :

[RPI-A1-4PoE, PoE Injector](#) [6GK51082RS002AC2](#) [58933](#) [58814](#) [NT-116-0000-0000](#) [IES-150B](#) [SLX-8ES-1](#) [58900](#) [SLX-5ES-1](#) [SLX-5ES-2ST](#) [SPIDER-SL-20-05T1999999TY9HHHH](#) [2891057](#) [EKI-2710E-2CI-A](#) [EKI-2710G-2FPI-A](#) [EKI-2712G-4FPI-AE](#) [EKI-2716EI-A](#) [EKI-5708E-2FI-A](#) [EKI-5708E-I-A](#) [EKI-2528DI-AE](#) [SW-084](#) [SW-114](#) [SW-118](#) [SW-135](#) [SW-184](#) [SW-195](#) [SW-514](#) [SW-518](#) [SW-535](#) [SW-584](#) [SW-595](#) [SW-7016](#) [SW-718](#) [SW-735](#) [SW-7416](#) [SW-7617](#) [SW-7717](#) [20772083001](#) [24020080010](#) [24024080010](#) [24034060030](#) [20773081000](#) [97000001118](#) [SPIDER-PL-20-16T1999999TY9HHHV](#) [SPIDER-PL-20-16T1999999TX9HHHV](#) [SPIDER-PL-30-24T1O6O699TWWHHHV](#) [SPIDER-SL-20-01T1M29999SZ9HHHH](#) [SSL20-4TX/1FX-SM](#) [SSL20-4TX/1FX](#) [SSL20-8TX](#) [SPIDER-SL-20-08T1999999TY9HHHH](#)