




TSW304

v1.11



HARDWARE


FRONT VIEW

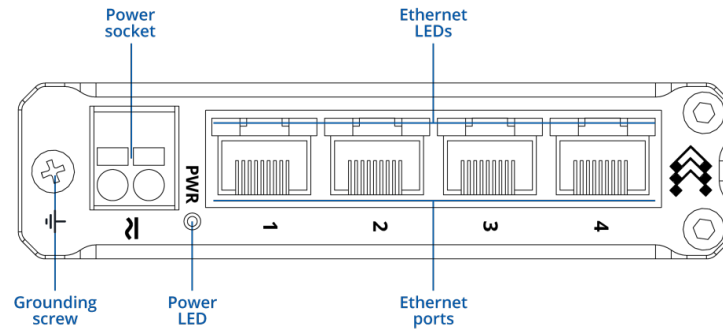


BACK VIEW



POWER SOCKET PINOUT

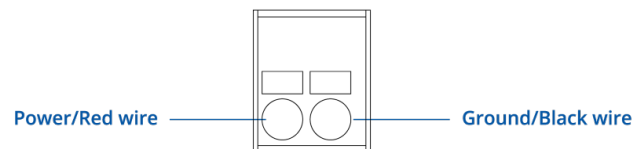

RJ45 LED MEANING

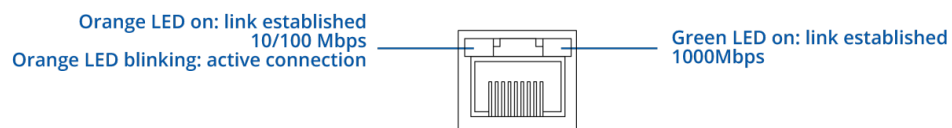

FEATURES

Ethernet

ETH	4 x ETH ports, 10/100/1000 Mbps, supports auto MDI/MDIX crossover
IEEE 802.3 series standards	802.3i, 802.3u, 802.3ab, 802.3x, 802.3az

INDUSTRIAL PROTOCOLS

Profinet	Profinet Class A conformance (available with optional order code)
-----------------	---

Performance Specifications

Bandwidth (Non-blocking)	8 Gbps
Packer buffer	128 KB
MAC address table size	2K entries
Jumbo frame support	9216 bytes

Power

Connector	2-pin industrial DC power socket
Input voltage range	7 - 57 VDC; 9 - 40 VAC
PoE (passive)	Possibility to power up through ETH1 ports, not compatible with IEEE802.3af, 802.3at and 802.3bt standards, Mode B, 9 - 30 VDC
Power consumption	Idle: 0.26 W / Max: 1.44 W

Physical Interfaces

Ethernet	4 x RJ45 ports, 10/100/1000 Mbps
Status LEDs	8 x ETH status LEDs, 1 x Power LED
Power	1 x 2-pin industrial DC power socket
Other	1 x Grounding screw

Physical Specification

Casing material	Aluminium housing
Dimensions (W x H x D)	102 x 25 x 81.5 mm
Weight	210 g
Mounting options	Integrated DIN rail bracket; wall mount and flat surface (additional kit needed)

Operating Environment

Operating temperature	-40 °C to 75 °C
Operating humidity	5% to 95% non-condensing
Ingress Protection Rating	IP30

Regulatory & Type Approvals

Regulatory	CE, REACH, RoHS, WEEE, UKCA, FCC, IC, CB, RCM
-------------------	---

Safety

Standards	EN IEC 62368-1:2020+A11:2020 IEC 60068-2-6:2007 Environmental testing - Part 2-6 IEC 60068-2-27:2008 Environmental testing - Part 2-27 IEC 60068-2-31:2008 Environmental testing - Part 2-31
------------------	---

ORDERING

STANDARD PACKAGE*



TSW304



QSG (QUICK START GUIDE)

- TSW304
- QSG (Quick Start Guide)
- Packaging box

*Standard package contents may differ based on standard order codes.

For more information on all available packaging options – please [contact us](#) directly.

CLASSIFICATION CODES

HS Code: 851762

HTS: 8517.62.00

AVAILABLE VERSIONS

TSW304 *****0	N/A	TSW304000010 / Standard package
TSW304 *****1	N/A	
Profinet Class A conformance		TSW304000001 / Standard package without PSU

TSW304 SPATIAL MEASUREMENTS


PHYSICAL SPECIFICATION

Device housing (W x H x D)*	102 x 25 x 81.5 mm
Box (W x H x D):	175 x 35 x 150 mm


*Housing measurements are presented without antenna connectors and screws; for measurements of other device elements look to the sections below.

TOP VIEW

The figure below depicts the measurements of device and its components as seen from the top:

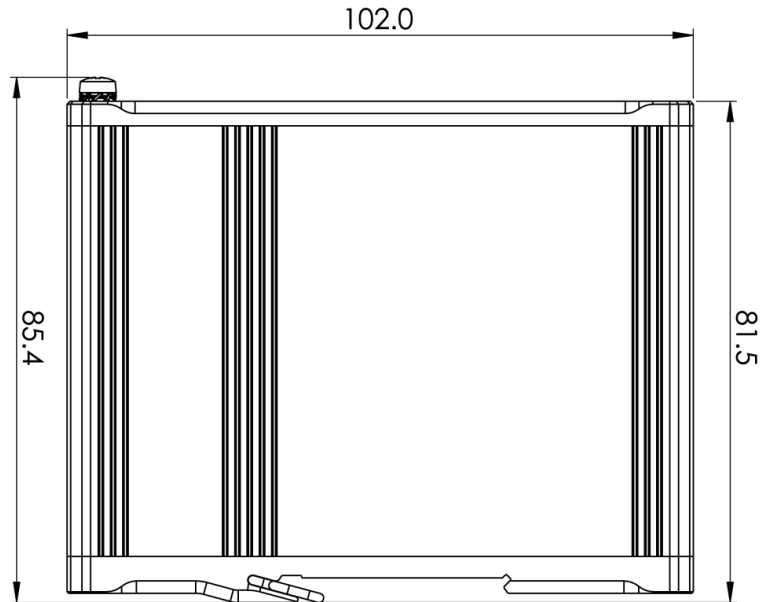

RIGHT VIEW

The figure below depicts the measurements of device and its components as seen from the right:

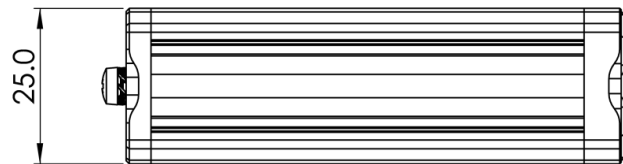


REAR VIEW

The figure below depicts the measurements of device and its components as seen from the back panel side:

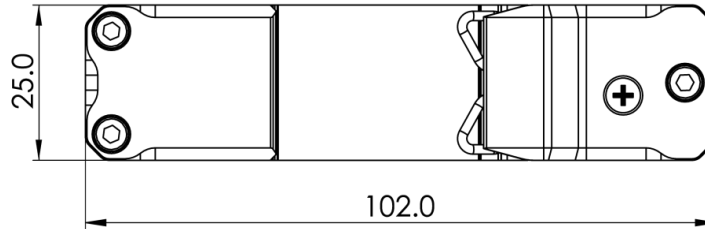


FRONT VIEW

The figure below depicts the measurements of device and its components as seen from the front panel side:

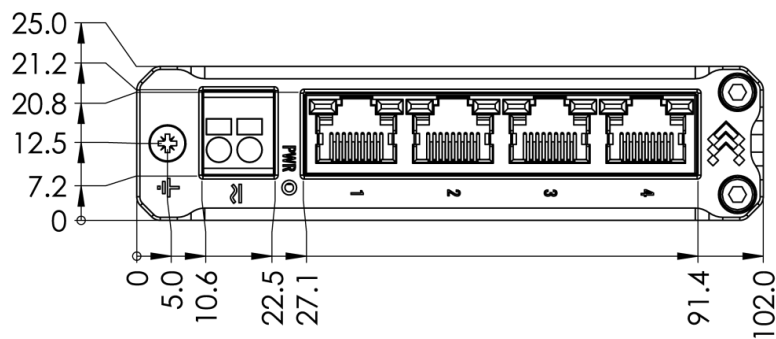

MOUNTING SPACE REQUIREMENTS

The figure below depicts an approximation of the device's dimensions when cables and antennas are attached:

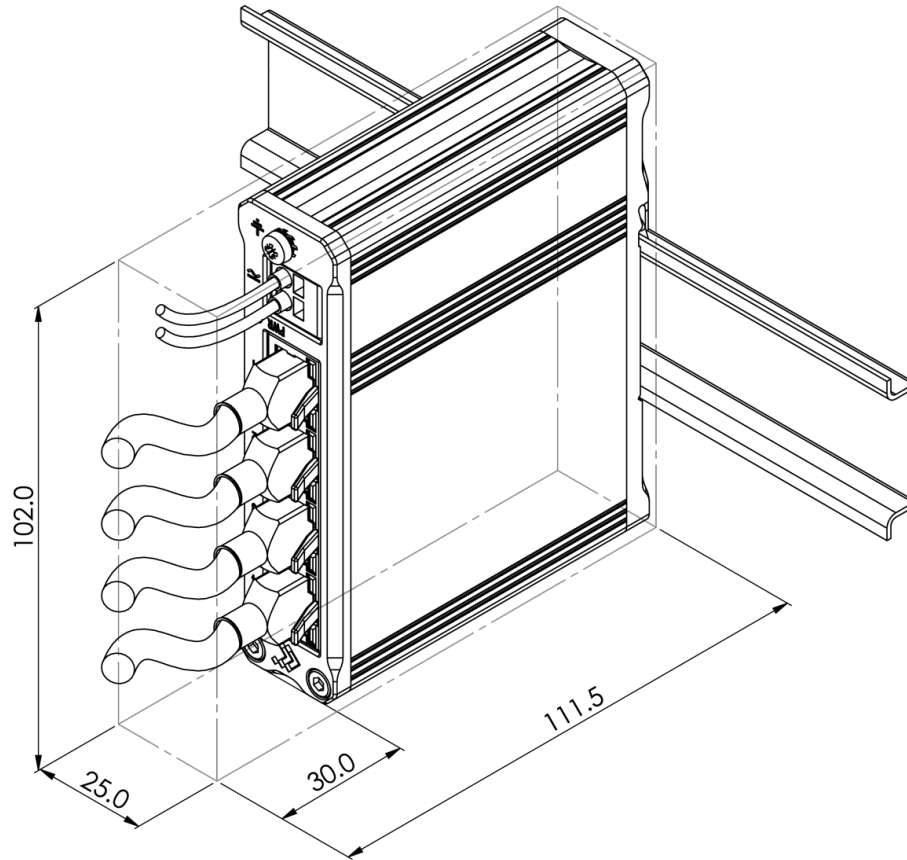

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Unmanaged Ethernet Switches](#) category:

Click to view products by [Teltonika](#) manufacturer:

Other Similar products are found below :

[RPI-A1-4PoE, PoE Injector](#) [6GK51082RS002AC2](#) [58933](#) [58814](#) [NT-116-0000-0000](#) [IES-150B](#) [SLX-8ES-1](#) [58900](#) [SLX-5ES-1](#) [SLX-5ES-2ST](#) [SPIDER-SL-20-05T1999999TY9HHHH](#) [2891057](#) [EKI-2710E-2CI-A](#) [EKI-2710G-2FPI-A](#) [EKI-2712G-4FPI-AE](#) [EKI-2716EI-A](#) [EKI-5708E-2FI-A](#) [EKI-5708E-I-A](#) [EKI-2528DI-AE](#) [SW-084](#) [SW-114](#) [SW-118](#) [SW-135](#) [SW-184](#) [SW-195](#) [SW-514](#) [SW-518](#) [SW-535](#) [SW-584](#) [SW-595](#) [SW-7016](#) [SW-718](#) [SW-735](#) [SW-7416](#) [SW-7617](#) [SW-7717](#) [20772083001](#) [24020080010](#) [24024080010](#) [24034060030](#) [20773081000](#) [97000001118](#) [SPIDER-PL-20-16T1999999TY9HHHV](#) [SPIDER-PL-20-16T1999999TX9HHHV](#) [SPIDER-PL-30-24T1O6O699TWWHHHV](#) [SPIDER-SL-20-01T1M29999SZ9HHHH](#) [SSL20-4TX/1FX-SM](#) [SSL20-4TX/1FX](#) [SSL20-8TX](#) [SPIDER-SL-20-08T1999999TY9HHHH](#)