

High Voltage Positive Voltage Regulators

■GENERAL DESCRIPTION

The XC6202 series are highly precise, low power consumption, high voltage input, positive voltage regulators manufactured using CMOS and laser trimming technologies. The XC6202 consists of a current limiter circuit, a driver transistor, a precision reference voltage and an error correction circuit.

Output voltage is selectable in 0.1V steps from 1.8V ~ 18V. The series are also compatible with low ESR ceramic capacitors which give added output stability.

Since the current limiter circuit is built-in, the IC is protected against overshoot currents at such times of output shorts etc. SOT-23, SOT-89, TO-92, SOT-223 and USP-6B packages are available.


■APPLICATIONS

- Multi-function power supplies
- Note PCs / Tablet PCs
- Digital still cameras / Camcorders
- Reference voltage sources


■FEATURES

Maximum Output Current	: 150mA (within Pd)
Maximum Operational Voltage	: 20V
Output Voltage Range	: 1.8V ~ 18V (0.1V increments)
Highly Accurate	: ±2%
Low Power Consumption	: 10 μA (TYP.)
Line Regulation	: 0.01% / V (TYP.)
Dropout Voltage	: 200mV @ 30mA 670mV@100mA
Operational Temperature Range	: -40°C ~ 85°C
Low ESR Capacitor Compatible	: Ceramic capacitor
Current Limiter Circuit Built-In	
Packages	: SOT-23 SOT-89 TO-92 SOT-223 USP-6B
Environmentally Friendly	: EU RoHS Compliant, Pb Free


■TYPICAL APPLICATION CIRCUIT

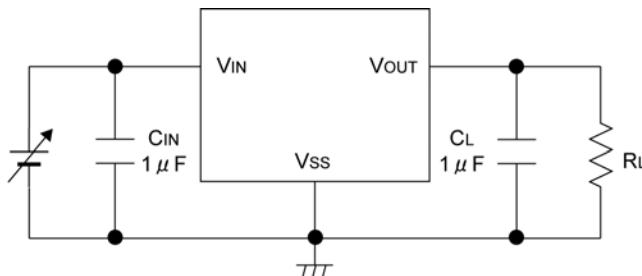


■TYPICAL PERFORMANCE CHARACTERISTICS

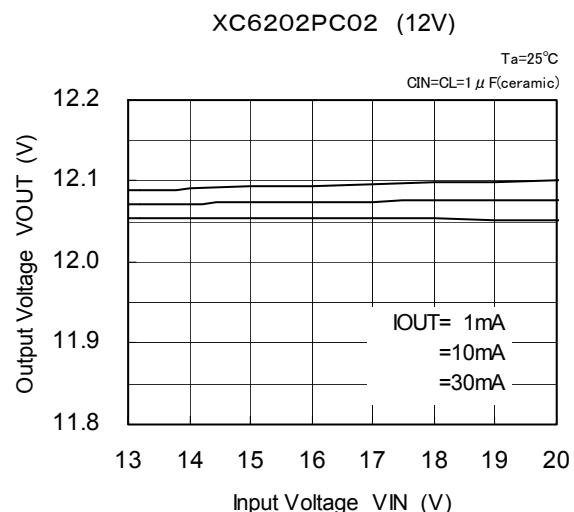


■PIN CONFIGURATION




SOT-23
(TOP VIEW)




SOT-89
(TOP VIEW)



SOT-223
(TOP VIEW)

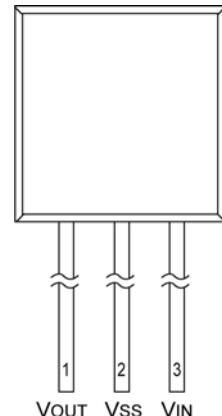

TO-92
(SIDE VIEW)



USP-6B
(BOTTOM VIEW)

*The dissipation pad for the USP-6B package should be solder-plated in recommended mount pattern and metal masking so as to enhance mounting strength and heat release. If the pad needs to be connected to other pins, it should be connected to the VSS (No.5) pin.

■PIN ASSIGNMENT

PIN NUMBER			PIN NAME	FUNCTIONS
SOT-23	SOT-89/TO-92/ SOT-223	USP-6B		
1	1	3	VOUT	Output
3	2	5	Vss	Ground
2	3	1	VIN	Power Input
—	—	2, 4, 6	NC	No connection

■ PRODUCT CLASSIFICATION


● Ordering Information

XC6202P①②③④⑤-⑥^{(*)1}

DESIGNATOR	ITEM	SYMBOL	DESCRIPTION
①②	Output Voltage	18 ~ J0	: For the voltage above 10V, see the example 10=A, 11=B 12=C, 13=D, 14=E, 15=F, 16=G, 17=H, 18=J e.g. VOUT= 3.0V → ①:3, ②:0 VOUT= 12V → ①:C, ②:0 VOUT= 15V → ①:F, ②:0
③	Accuracy	2	: ±2%
④⑤-⑥ ^{(*)1}	Packages (Order Unit)	MR	: SOT-23 (3,000/Reel)
		MR-G	: SOT-23 (3,000/Reel)
		PR	: SOT-89 (1,000/Reel)
		PR-G	: SOT-89 (1,000/Reel)
		TH	: TO-92 Taping Type: Paper type (2,000/Tape)
		TH-G	: TO-92 Taping Type: Paper type (2,000/Tape)
		TB	: TO-92 Taping Type: Bag (500/Bag)
		TB-G	: TO-92 Taping Type: Bag (500/Bag)
		FR	: SOT-223 (1,000/Reel)
		FR-G	: SOT-223 (1,000/Reel)
		DR	: USP-6B (3,000/Reel)
		DR-G	: USP-6B (3,000/Reel)

^{(*)1} The “-G” suffix denotes Halogen and Antimony free as well as being fully EU RoHS compliant.

■ BLOCK DIAGRAM

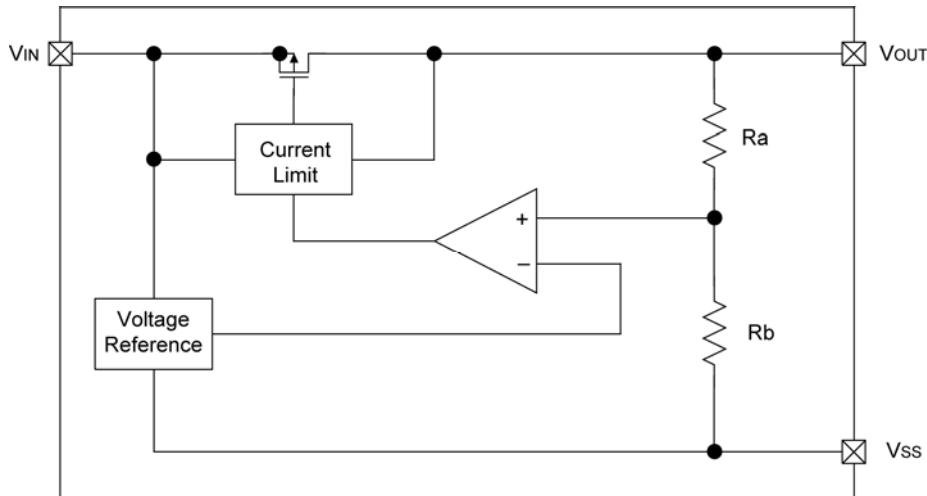

■ ABSOLUTE MAXIMUM RATINGS

T_a = 25°C

PARAMETER	SYMBOL	RATINGS	UNITS
Input Voltage	V _{IN}	22.0	V
Output Current	I _{OUT}	500	mA
Output Voltage	V _{OUT}	V _{SS} -0.3 ~ V _{IN} +0.3	V
Power Dissipation	SOT-23	P _d	250
	SOT-89		500
	TO-92		300
	USP-6B		120
	SOT-223		1,200 *
Operating Ambient Temperature	T _{opr}	-40~+85	°C
Storage Temperature	T _{stg}	-55~+125	°C

* Circuits board mounting: Double-sided board

■ELECTRICAL CHARACTERISTICS

XC6202P182 V_{OUT(T)}=1.8V (*1)

T_a=25°C

PARAMETER	SYMBOL	CONDITIONS	MIN.	TYP.	MAX.	UNITS	CIRCUIT
Output Voltage	V _{OUT(E)} (*2)	V _{IN} =2.8V I _{OUT} =30mA	1.764	1.800	1.836	V	②
Maximum Output Current	I _{OUTmax}	V _{IN} =2.8V V _{OUT} ≥V _{OUT(E)} × 0.9	60	-	-	mA	②
Load Regulation	ΔV _{OUT}	V _{IN} =2.8V 1mA≤I _{OUT} ≤60mA	-	10	80	mV	②
Dropout Voltage(*3)	V _{dif1}	I _{OUT} =30mA	-	340	470	mV	②
	V _{dif2}	I _{OUT} =100mA	-	1000	1500		
Supply Current	I _{SS}	V _{IN} =2.8V	-	10	24	μA	①
Line Regulation	ΔV _{OUT} / (ΔV _{IN} · ΔV _{OUT})	I _{OUT} =1mA 2.8V≤V _{IN} ≤20V	-	0.01	0.20	%/V	②
Input Voltage	V _{IN}		-	-	20	V	-
Output Voltage Temperature Characteristics	ΔV _{OUT} / (ΔT _a · ΔV _{OUT})	I _{OUT} =30mA -40°C≤T _a ≤85°C	-	±100	-	ppm/°C	②
Short-circuit Current	I _{short}	V _{IN} =3.8V	-	40	-	mA	②

XC6202P332 V_{OUT(T)}=3.3V (*1)

T_a=25°C

PARAMETER	SYMBOL	CONDITIONS	MIN.	TYP.	MAX.	UNITS	CIRCUIT
Output Voltage	V _{OUT(E)} (*2)	V _{IN} =4.3V I _{OUT} =30mA	3.234	3.300	3.366	V	②
Maximum Output Current	I _{OUTmax}	V _{IN} =4.3V V _{OUT} ≥V _{OUT(E)} × 0.9	150	-	-	mA	②
Load Regulation	ΔV _{OUT}	V _{IN} =4.3V 1mA≤I _{OUT} ≤100mA	-	25	90	mV	②
Dropout Voltage(*3)	V _{dif1}	I _{OUT} =30mA	-	200	280	mV	②
	V _{dif2}	I _{OUT} =100mA	-	670	900		
Supply Current	I _{SS}	V _{IN} =4.3V	-	10	24	μA	①
Line Regulation	ΔV _{OUT} / (ΔV _{IN} · ΔV _{OUT})	I _{OUT} =1mA 4.3V≤V _{IN} ≤20V	-	0.01	0.20	%/V	②
Input Voltage	V _{IN}		-	-	20	V	-
Output Voltage Temperature Characteristics	ΔV _{OUT} / (ΔT _a · ΔV _{OUT})	I _{OUT} =30mA -40°C≤T _a ≤85°C	-	±100	-	ppm/°C	②
Short-circuit Current	I _{short}	V _{IN} =5.3V	-	40	-	mA	②

■ ELECTRICAL CHARACTERISTICS (Continued)

XC6202P502 V_{OUT(T)}=5.0V (*1) Ta=25°C

PARAMETER	SYMBOL	CONDITIONS	MIN.	TYP.	MAX.	UNITS	CIRCUIT
Output Voltage	V _{OUT(E)} (*2)	V _{IN} =6V I _{OUT} =30mA	4.900	5.000	5100	V	②
Maximum Output Current	I _{OUTmax}	V _{IN} =6V V _{OUT} ≥V _{OUT(E)} ×0.9	200	-	-	mA	②
Load Regulation	ΔV _{OUT}	V _{IN} =6V 1mA≤I _{OUT} ≤100mA	-	30	100	mV	②
Dropout Voltage(*3)	V _{dif1}	I _{OUT} =30mA	-	130	190	mV	②
	V _{dif2}	I _{OUT} =100mA	-	440	550		
Supply Current	I _{SS}	V _{IN} =6V	-	10	24	μA	①
Line Regulation	ΔV _{OUT} / (ΔV _{IN} ·ΔV _{OUT})	I _{OUT} =1mA 6V≤V _{IN} ≤20V	-	0.01	0.20	%/V	②
Input Voltage	V _{IN}		-	-	20	V	-
Output Voltage Temperature Characteristics	ΔV _{OUT} / (ΔT _a ·ΔV _{OUT})	I _{OUT} =30mA -40°C≤T _a ≤85°C	-	±100	-	ppm/°C	②
Short-circuit Current	I _{short}	V _{IN} =7V	-	40	-	mA	②

XC6202PC02 V_{OUT(T)}=12V (*1) Ta=25°C

PARAMETER	SYMBOL	CONDITIONS	MIN.	TYP.	MAX.	UNITS	CIRCUIT
Output Voltage	V _{OUT(E)} (*2)	V _{IN} =13V I _{OUT} =30mA	11.760	12.000	12.240	V	②
Maximum Output Current	I _{OUTmax}	V _{IN} =13V V _{OUT} ≥V _{OUT(E)} ×0.9	200	-	-	mA	②
Load Regulation	ΔV _{OUT}	V _{IN} =13V 1mA≤I _{OUT} ≤100mA	-	60	230	mV	②
Dropout Voltage(*3)	V _{dif1}	I _{OUT} =30mA	-	90	150	mV	②
	V _{dif2}	I _{OUT} =100mA	-	290	380		
Supply Current	I _{SS}	V _{IN} =13V	-	12	28	μA	①
Line Regulation	ΔV _{OUT} / (ΔV _{IN} ·ΔV _{OUT})	I _{OUT} =1mA 13V≤V _{IN} ≤20V	-	0.01	0.20	%/V	②
Input Voltage	V _{IN}		-	-	20	V	-
Output Voltage Temperature Characteristics	ΔV _{OUT} / (ΔT _a ·ΔV _{OUT})	I _{OUT} =30mA -40°C≤T _a ≤85°C	-	±100	-	ppm/°C	②
Short-circuit Current	I _{short}	V _{IN} =14V	-	40	-	mA	②

■ ELECTRICAL CHARACTERISTICS (Continued)

XC6202PJ02 V_{OUT(T)}=18V (*1)

T_a=25°C

PARAMETER	SYMBOL	CONDITIONS	MIN.	TYP.	MAX.	UNITS	CIRCUIT
Output Voltage	V _{OUT(E)} (*2)	V _{IN} =19V I _{OUT} =30mA	17.640	18.000	18.360	V	②
Maximum Output Current	I _{OUTmax}	V _{IN} =19V V _{OUT} ≥V _{OUT(E)} × 0.9	200	-	-	mA	②
Load Regulation	ΔV _{OUT}	V _{IN} =19V 1mA≤I _{OUT} ≤100mA	-	120	380	mV	②
Dropout Voltage(*3)	V _{dif1}	I _{OUT} =30mA	-	80	150	mV	②
	V _{dif2}	I _{OUT} =100mA	-	280	380		
Supply Current	I _{SS}	V _{IN} =19V	-	15	30	μA	①
Line Regulation	ΔV _{OUT} / (ΔV _{IN} · ΔV _{OUT})	I _{OUT} =1mA 19V≤V _{IN} ≤20V	-	0.01	0.20	%/V	②
Input Voltage	V _{IN}		-	-	20	V	-
Output Voltage Temperature Characteristics	ΔV _{OUT} / (ΔT _a · ΔV _{OUT})	I _{OUT} =30mA -40°C≤T _a ≤85°C	-	±100	-	ppm/°C	②
Short-circuit Current	I _{short}	V _{IN} =20V	-	40	-	mA	②

*1. V_{OUT(T)} = Specified output voltage.

*2. V_{OUT(E)} = Effective output voltage (i.e. the output voltage when "V_{OUT(T)}+1.0V" is provided at the V_{IN} pin while maintaining certain I_{OUT} value).


*3. V_{dif} = {V_{IN1}(*5)-V_{OUT1}(*4)}

*4. V_{OUT1} = A voltage equal to 98% of the output voltage when "V_{OUT(T)} + 1.0V" is input.


*5. V_{IN1} = The input voltage when V_{OUT1} is output following a gradual decrease in the input voltage.

■ TEST CIRCUITS

CIRCUIT ①

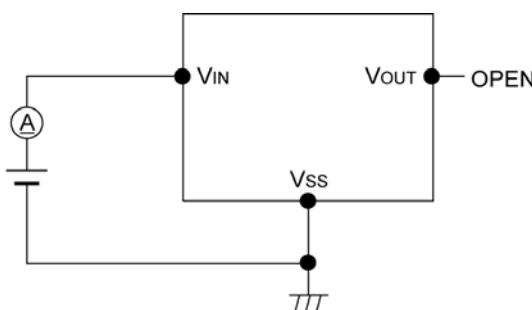



CIRCUIT ②

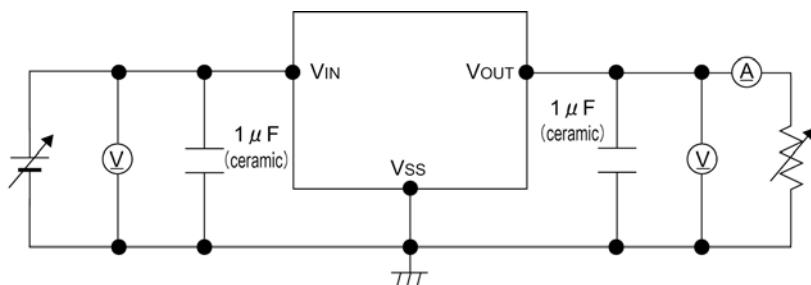



■ TYPICAL PERFORMANCE CHARACTERISTICS

● XC6202P182


(1) Output Voltage vs. Output Current

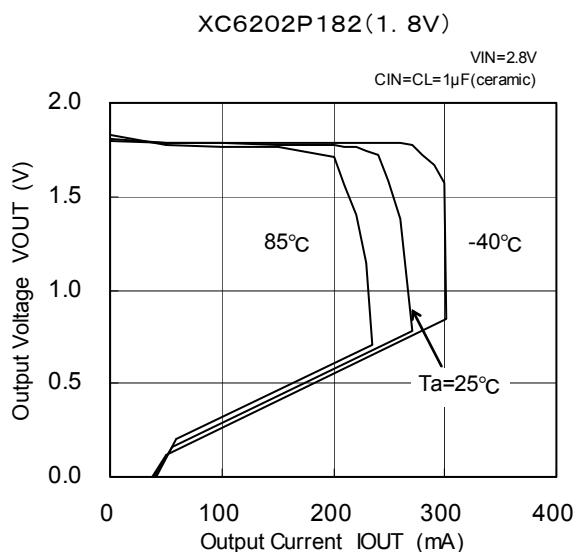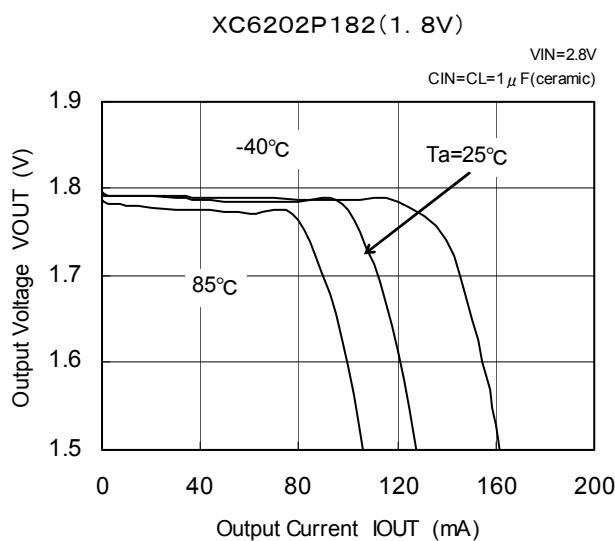

(2) Output Voltage vs. Input Voltage

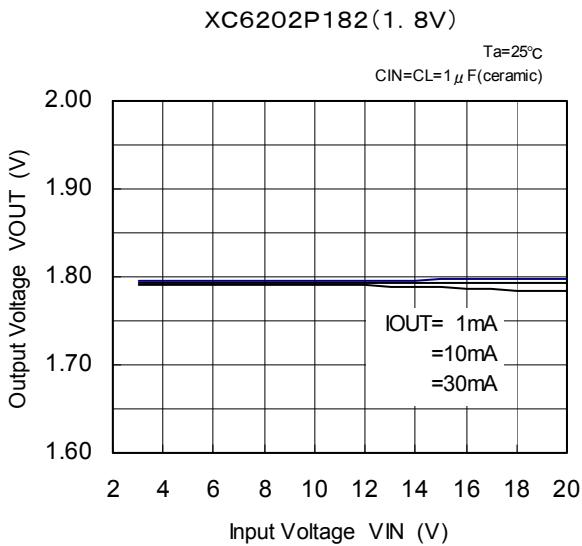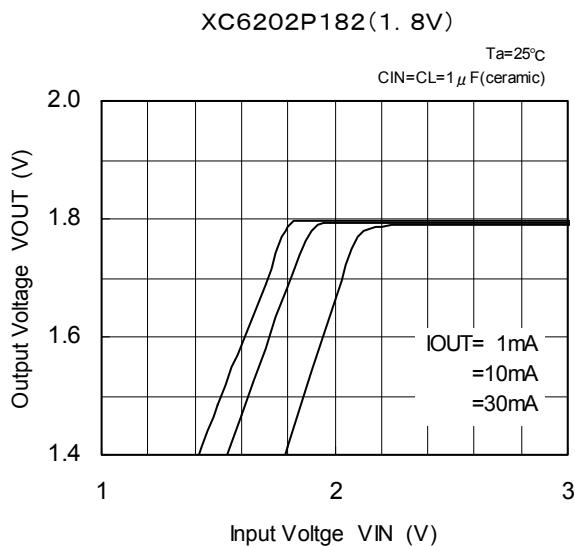


(3) Dropout Voltage vs. Output Current

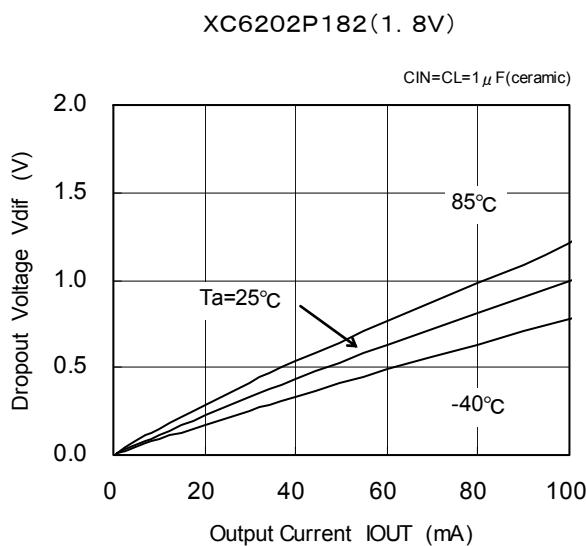


■ TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

● XC6202P182 (Continued)


(4) Supply Current vs. Input Voltage

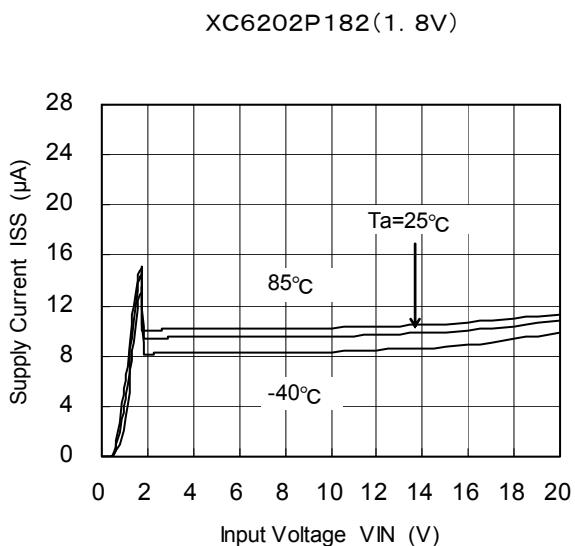


XC6202P182(1.8V)

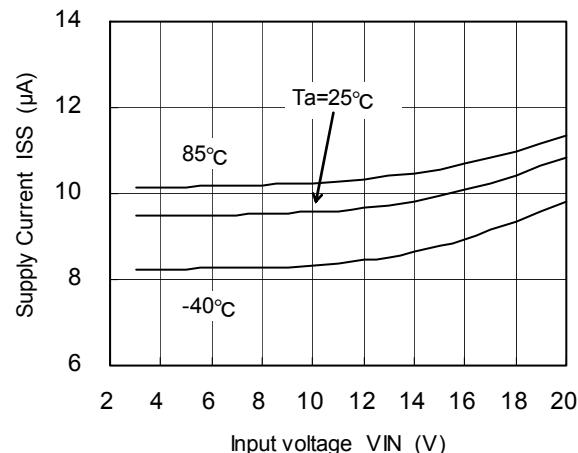

(5) Output Voltage vs. Ambient Temperature

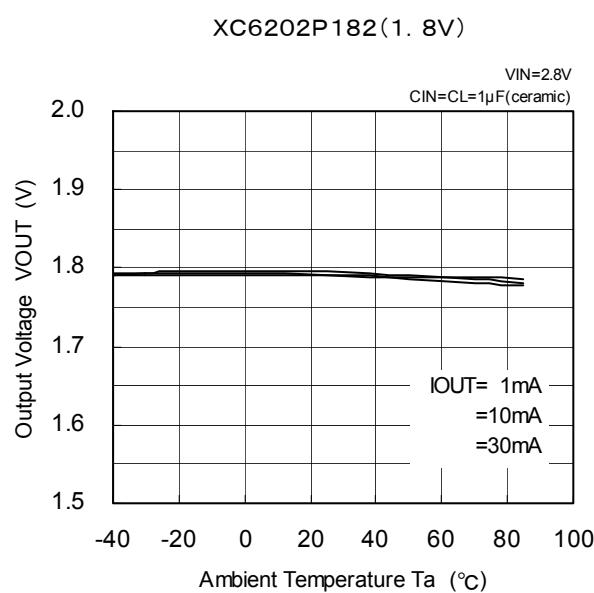



(6) Supply Current vs. Ambient Temperature

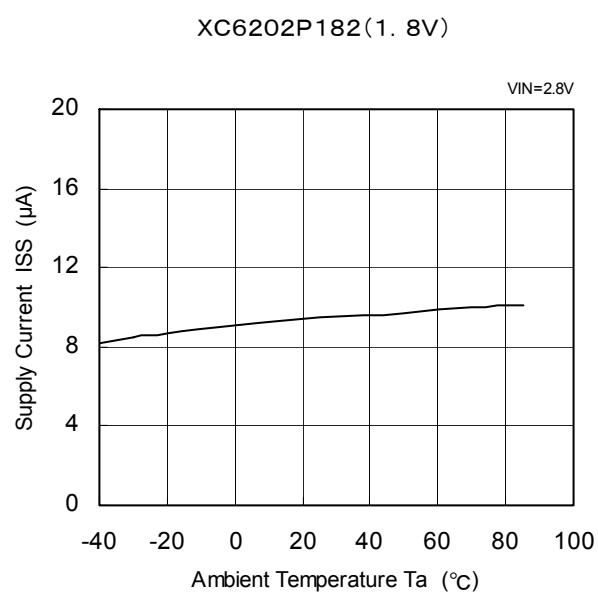



■ TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

● XC6202P182 (Continued)


(7) Input Transient Response 1

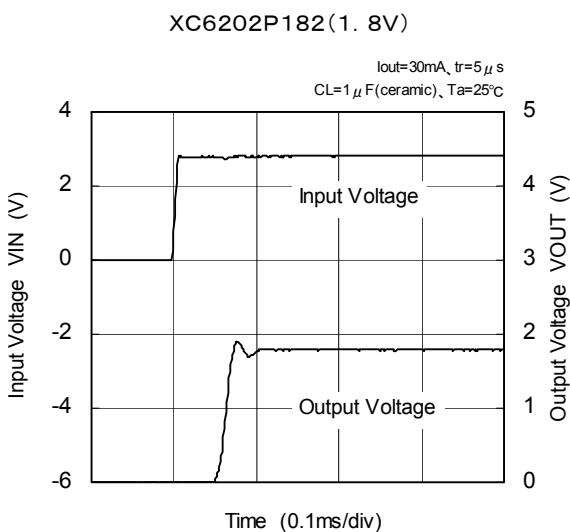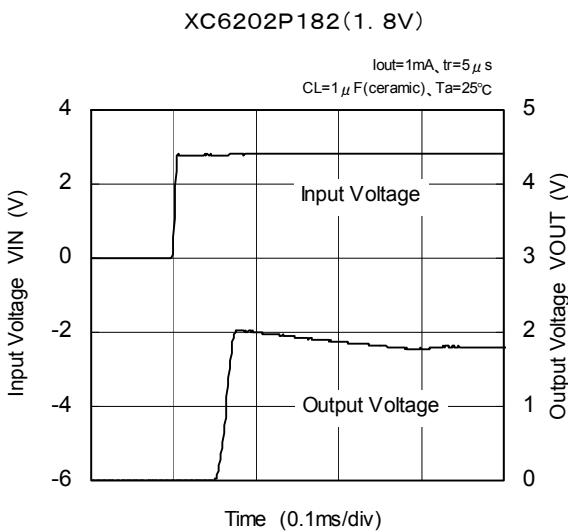

(8) Input Transient Response 2

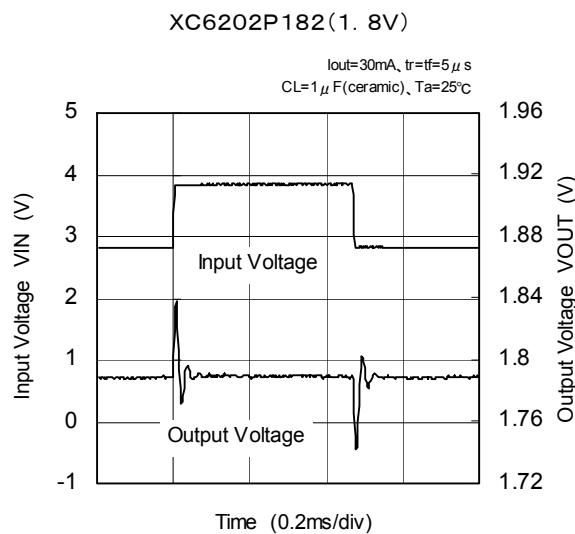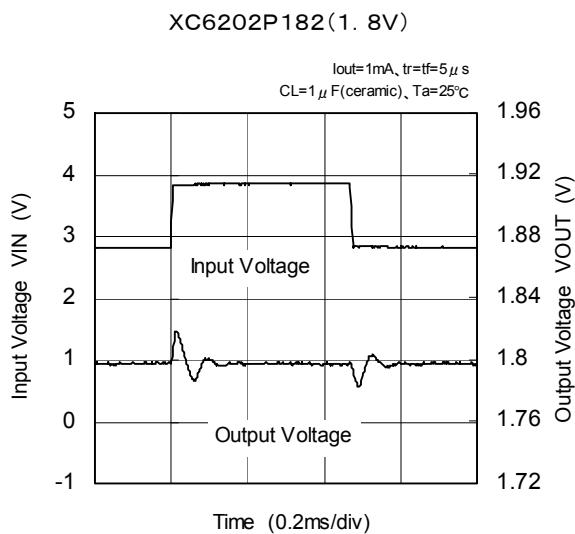




(9) Load Transient Response

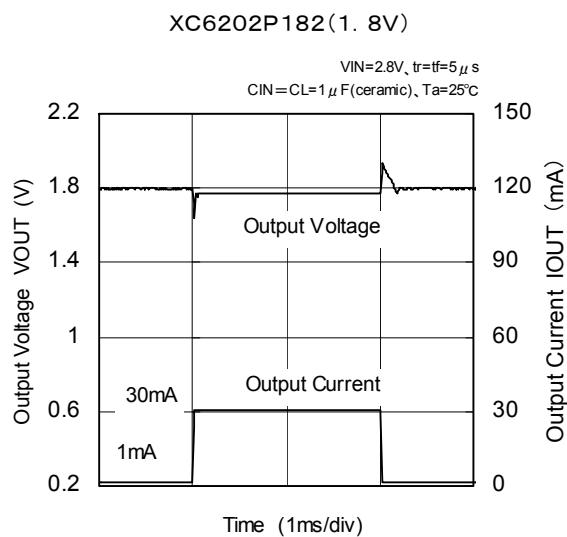

■ TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

- XC6202P182 (Continued)



(10) Ripple Rejection Rate

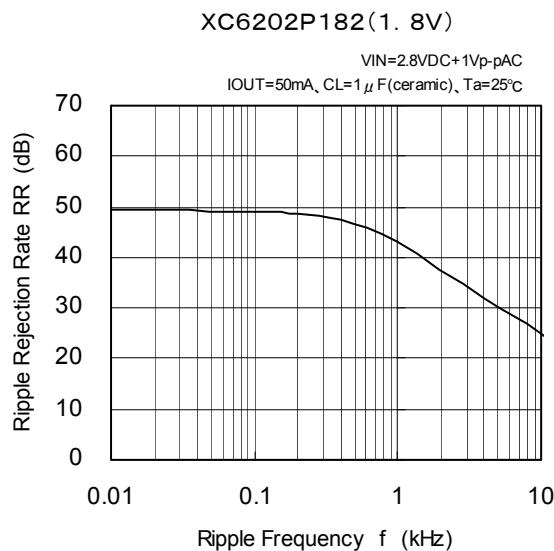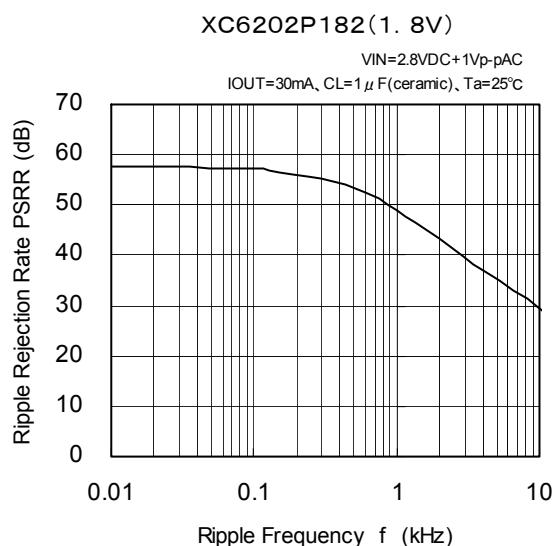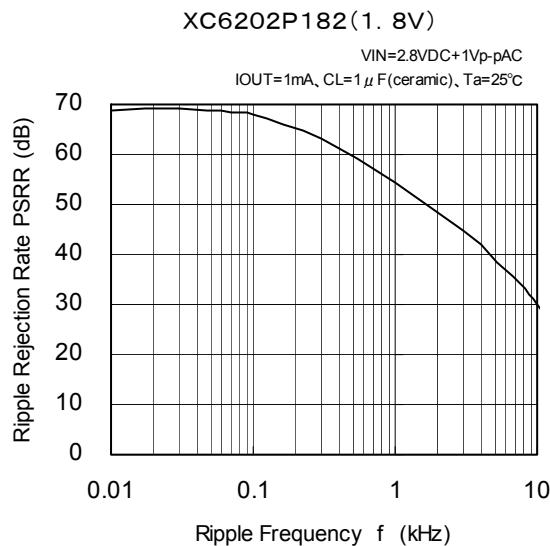



■ TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

● XC6202P332


(1) Output Voltage vs. Output Current

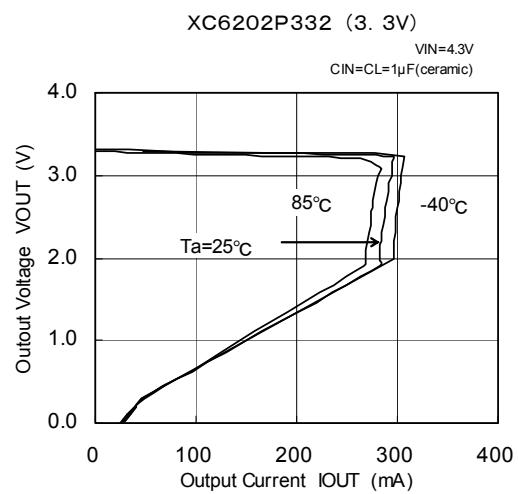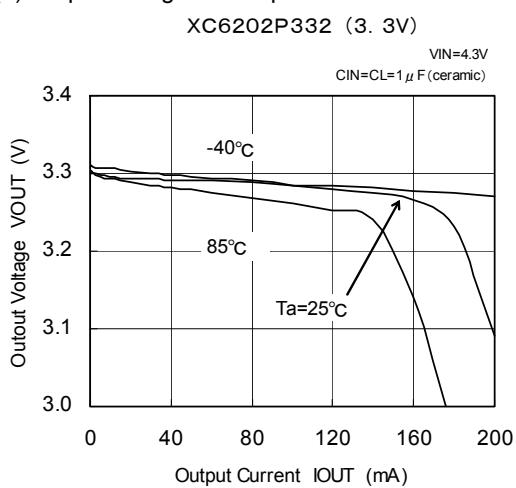

(2) Output Voltage vs. Input Voltage

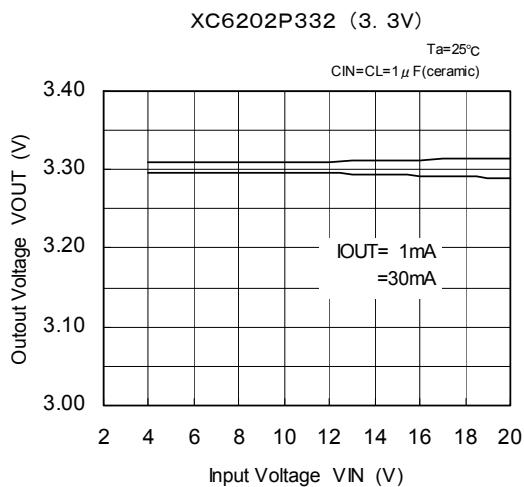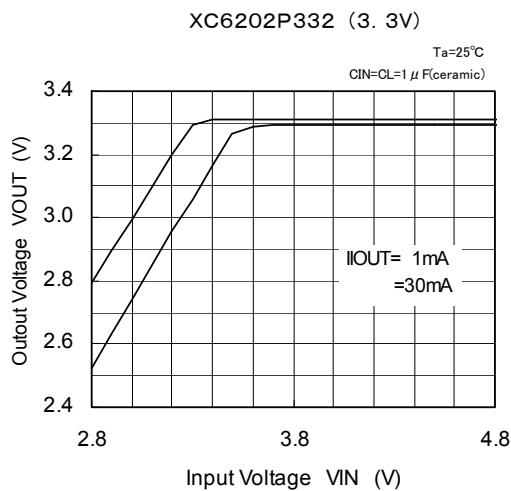



(3) Dropout Voltage vs. Output Current

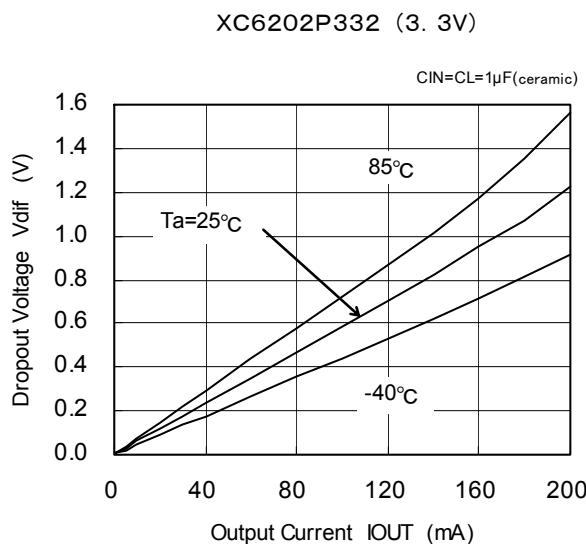


■ TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

● XC6202P332 (Continued)


(4) Supply Current vs. Input Voltage

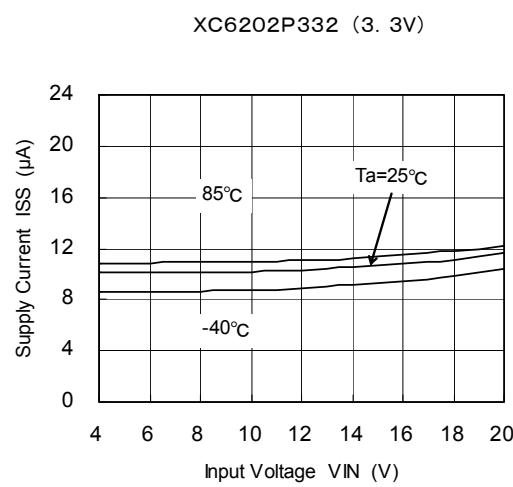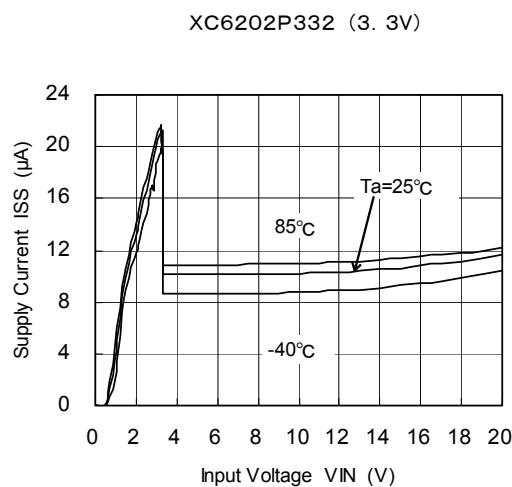

(5) Output Voltage vs. Ambient Temperature

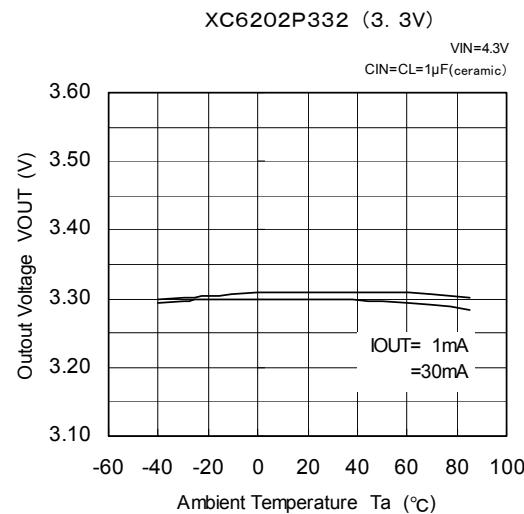


(6) Supply Current vs. Ambient Temperature

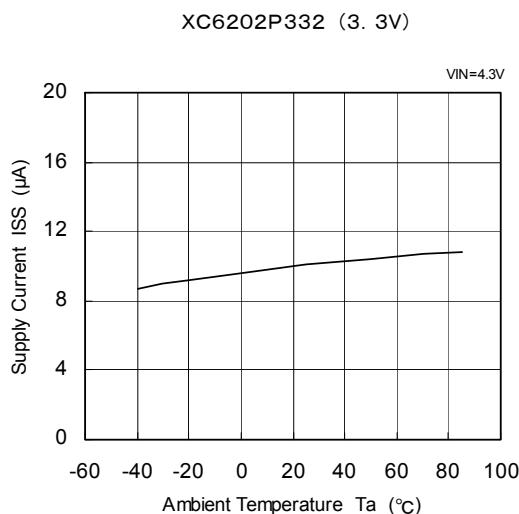


■ TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

● XC6202P332 (Continued)


(7) Input Transient Response 1

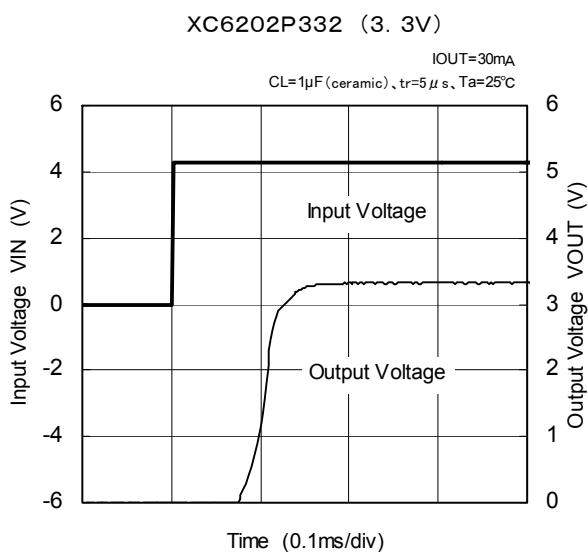

(8) Input Transient Response 2

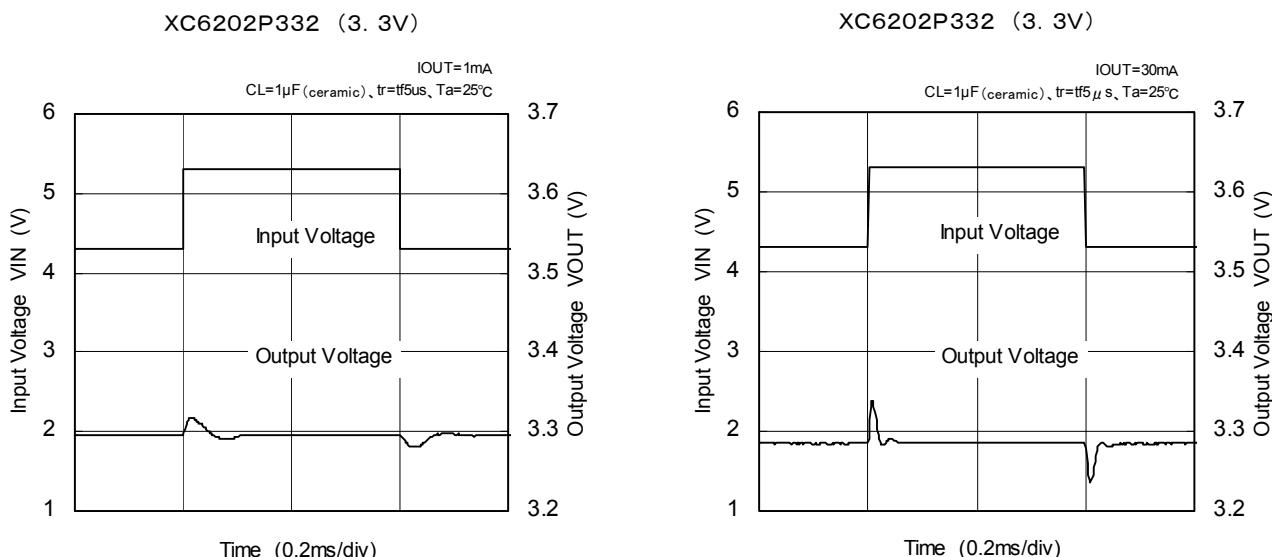






(9) Load Transient Response

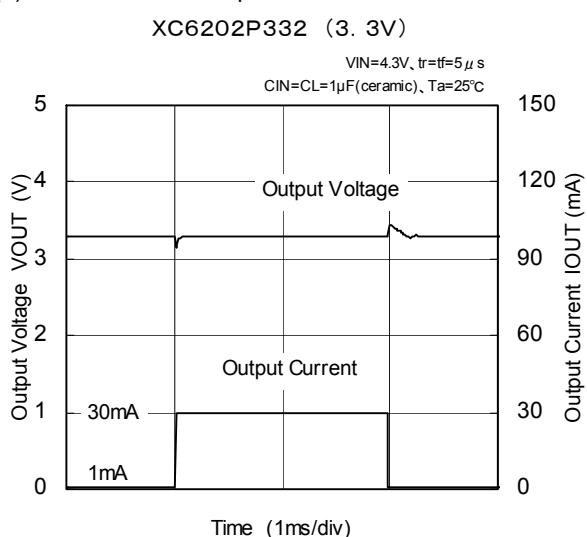

■ TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

● XC6202P332 (Continued)



(10) Ripple Rejection Rate

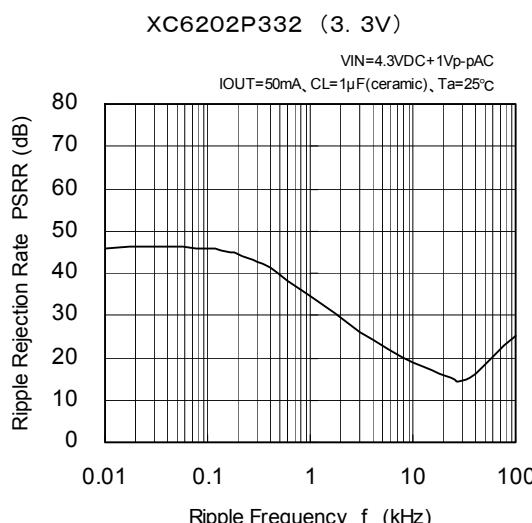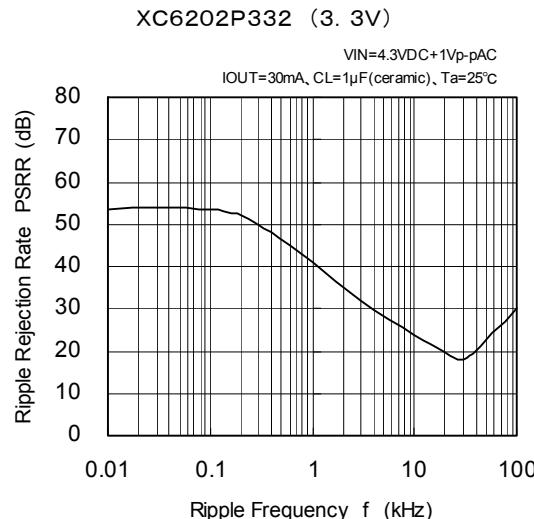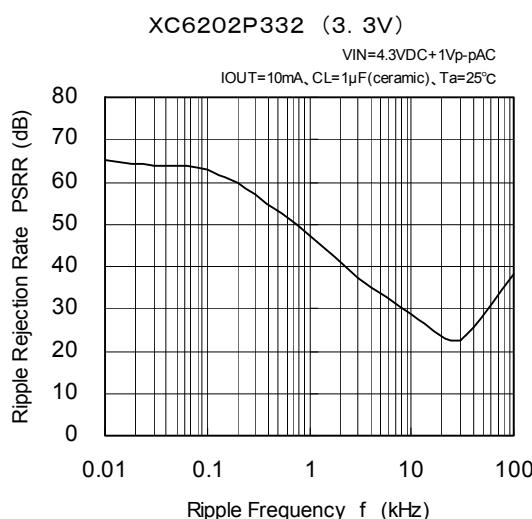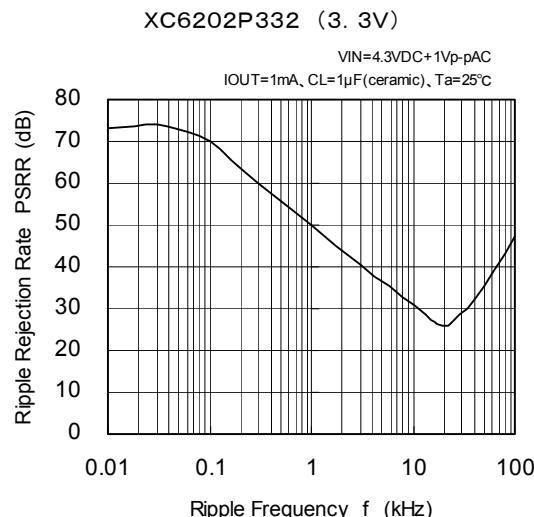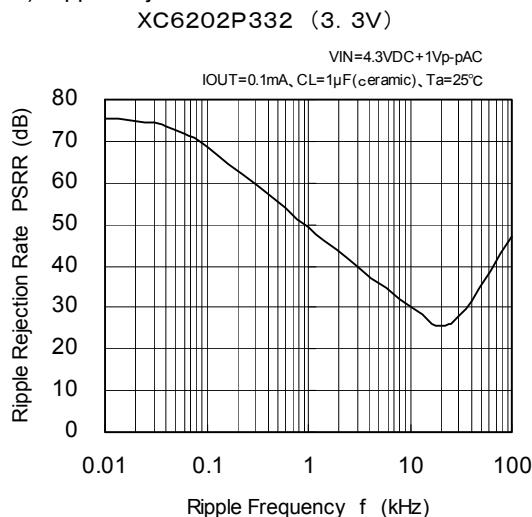



■ TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

● XC6202P502


(1) Output Voltage vs. Output Current

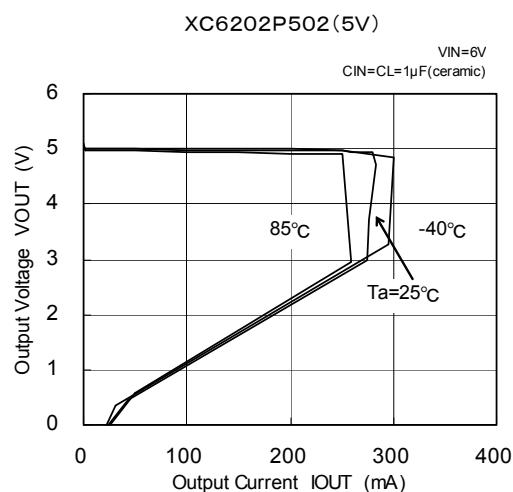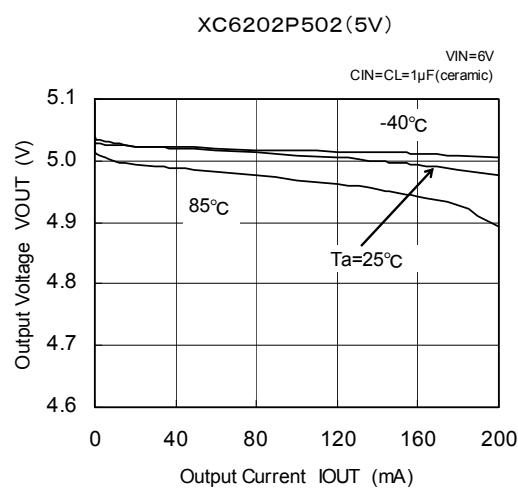

(2) Output Voltage vs. Input Voltage

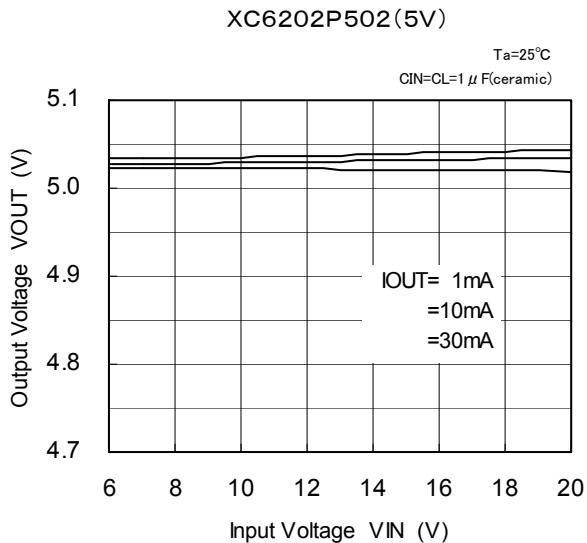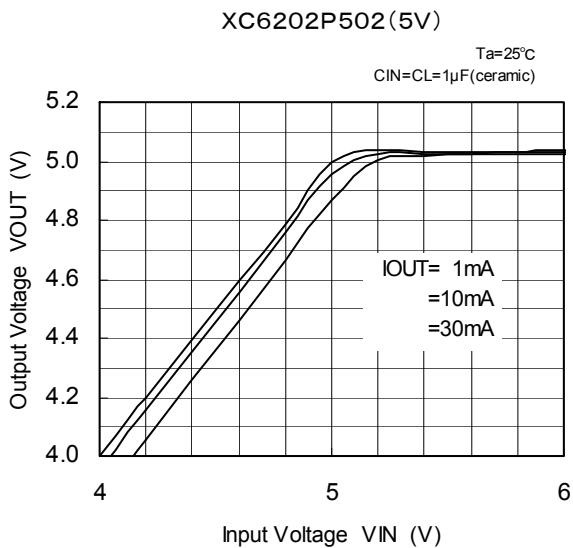


(3) Dropout Voltage vs. Output Current

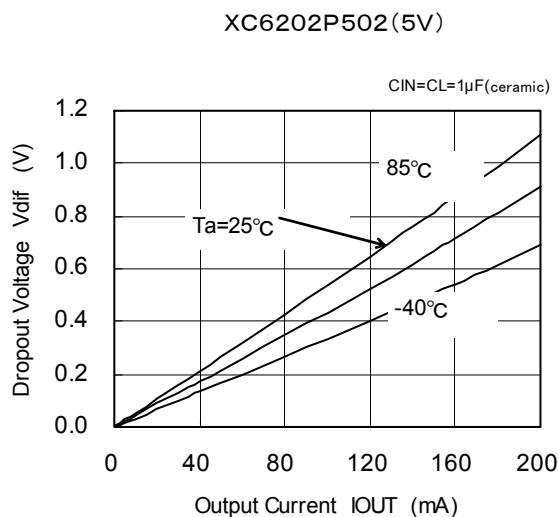


■ TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

● XC6202P502 (Continued)


(4) Supply Current vs. Input Voltage

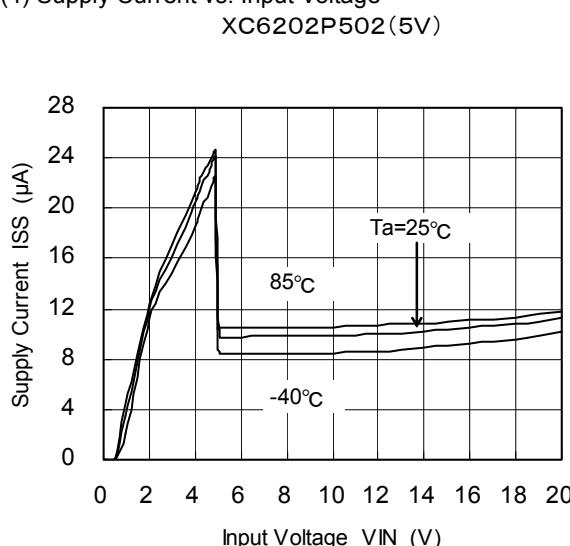


XC6202P502(5V)

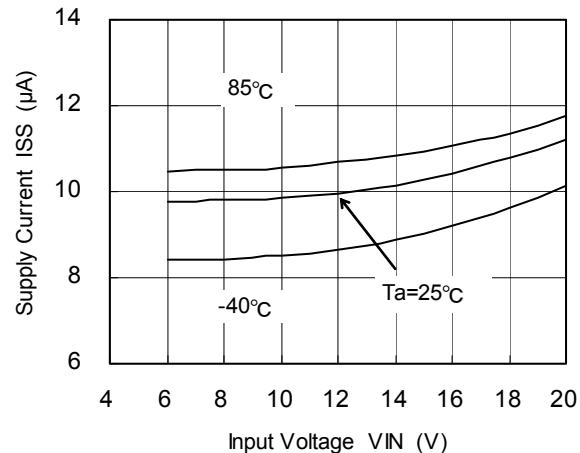

(5) Output Voltage vs. Ambient Temperature

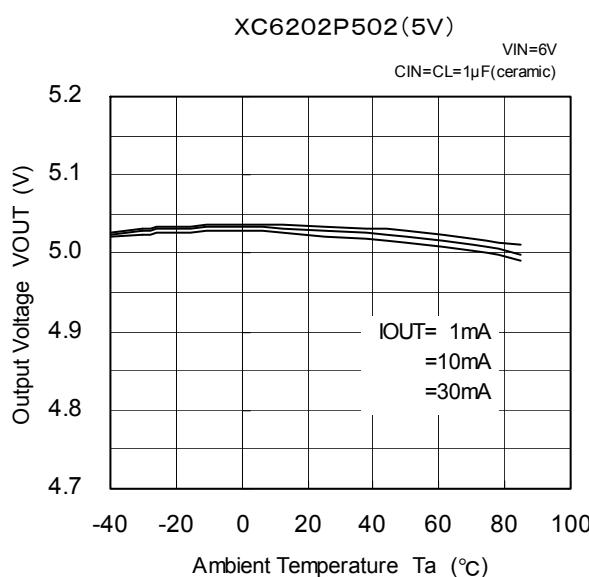

XC6202P502(5V)

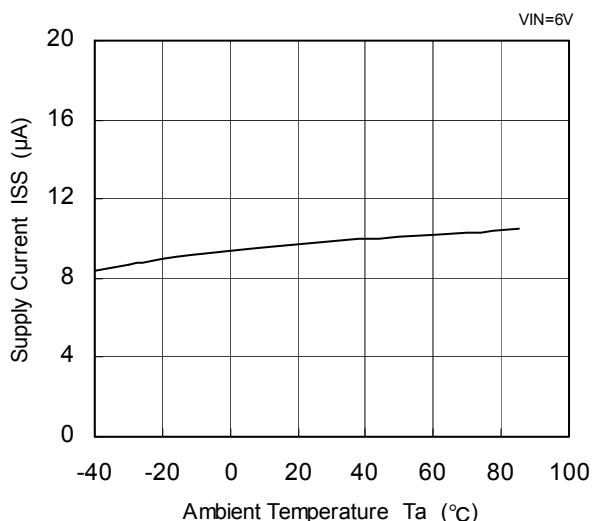


■ TYPICAL PERFORMANCE CHARACTERISTICS (Continued)


● XC6202P502 (Continued)

(7) Input Transient Response 1

XC6202P502(5V)

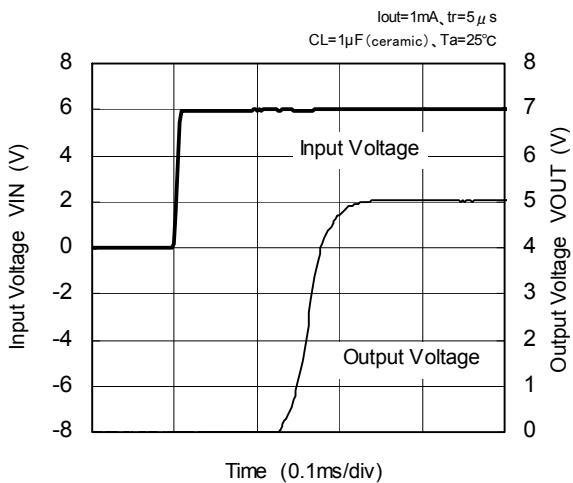


XC6202P502(5V)

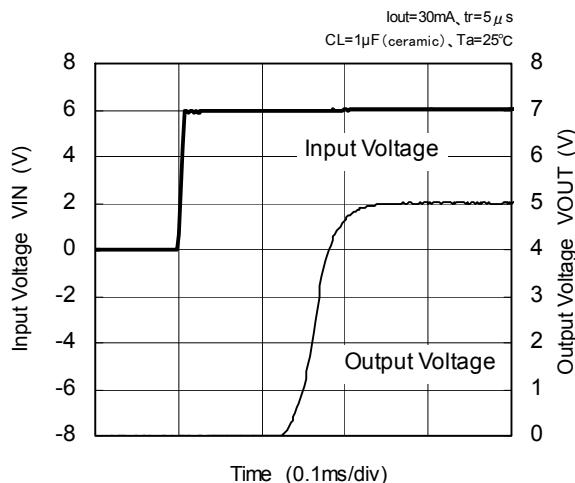


(8) Input Transient Response 2

XC6202P502(5V)

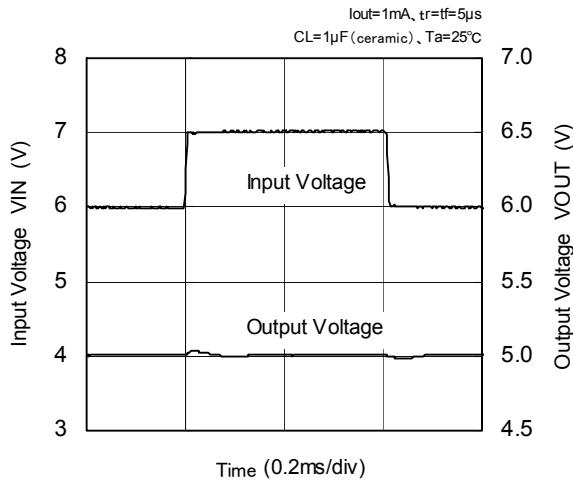


XC6202P502(5V)

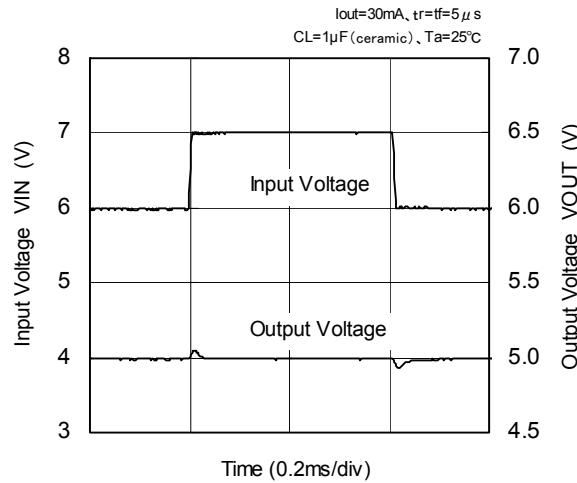

(9) Load Transient Response




XC6202P502(5V)

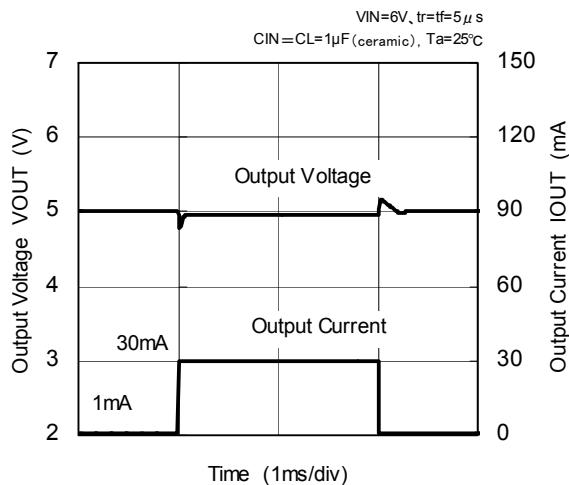

■TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

●XC6202P502 (Continued)



(10) Ripple Rejection Rate

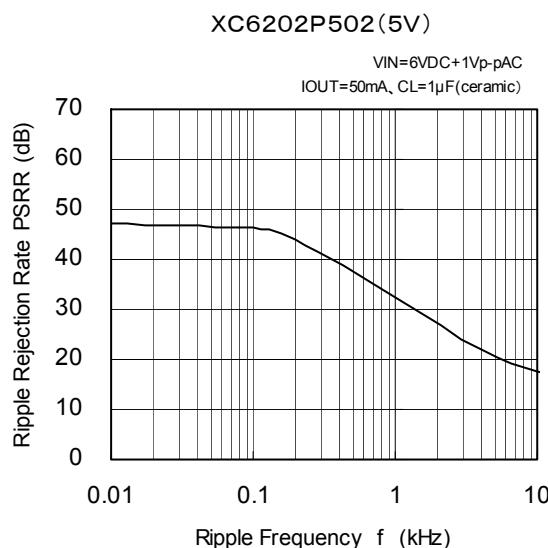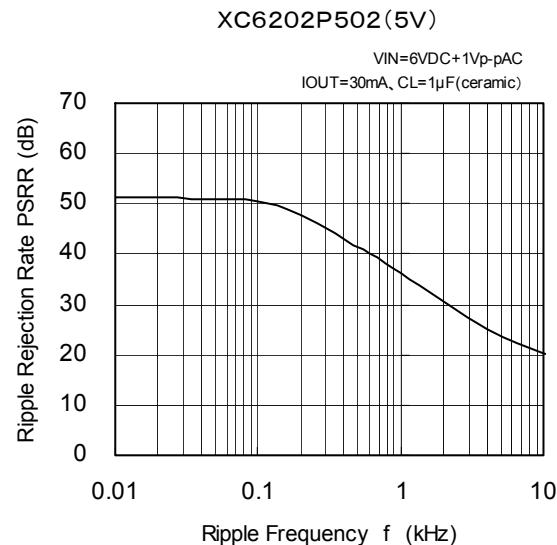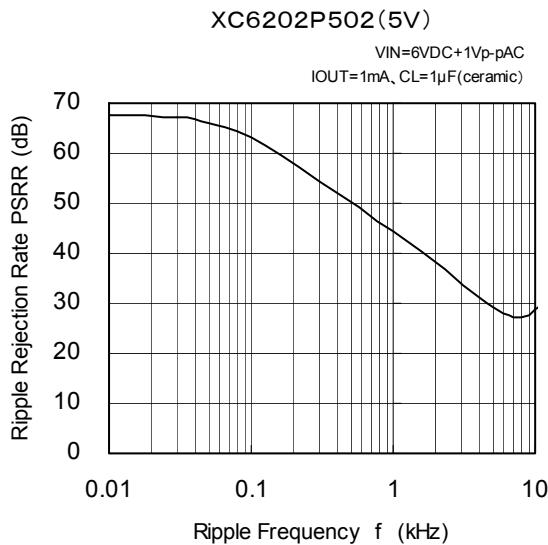



■ TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

● XC6202PC02


(1) Output Voltage vs. Output Current

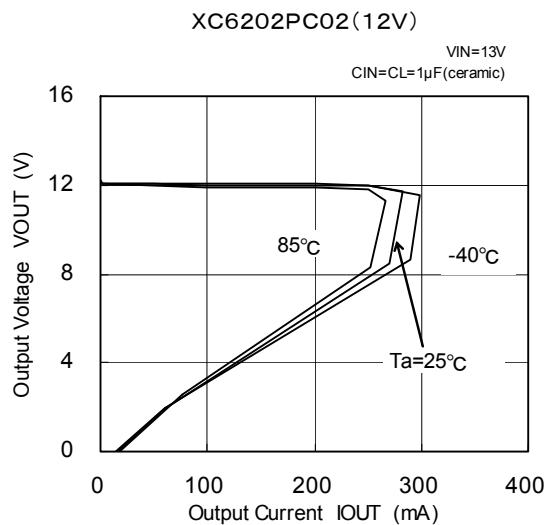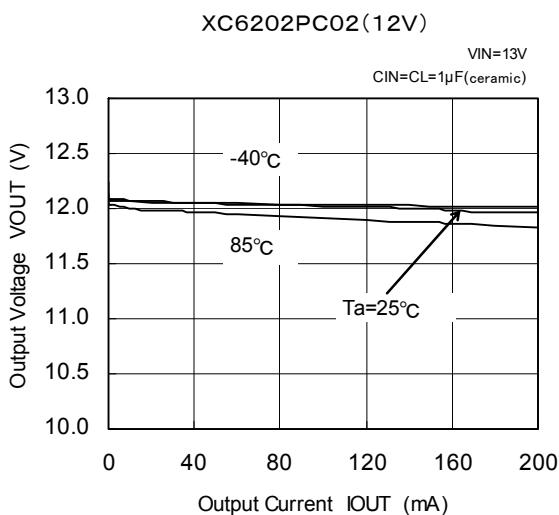

(2) Output Voltage vs. Input Voltage

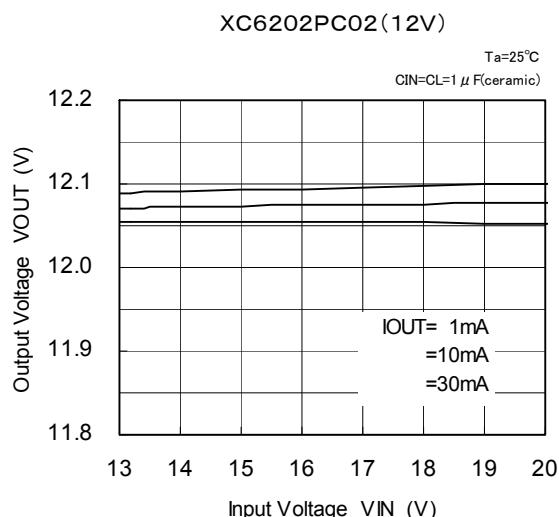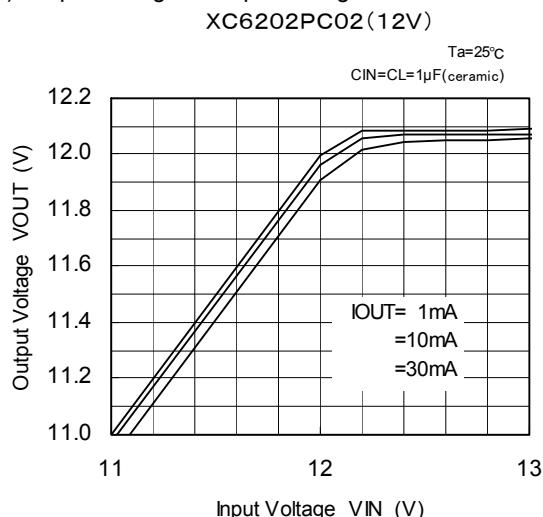


(3) Dropout Voltage vs. Output Current

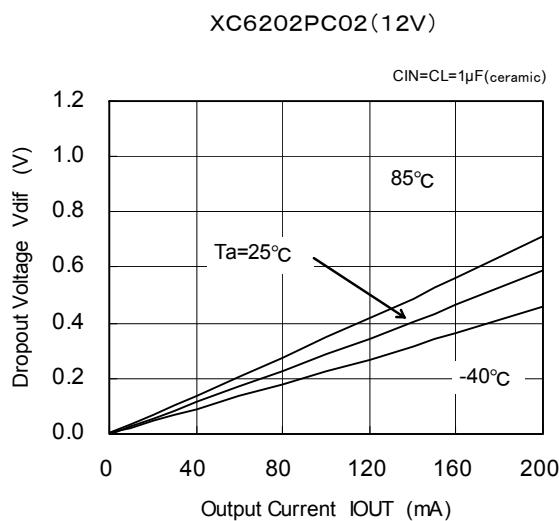


■TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

●XC6202PC02 (Continued)


(4) Supply Current vs. Input Voltage

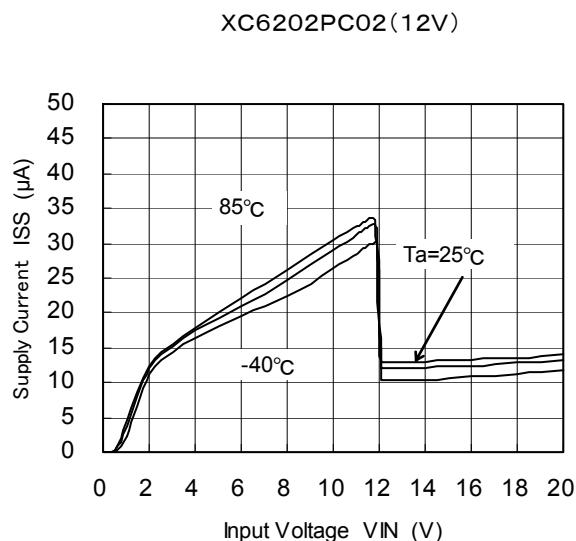


XC6202PC02(12V)

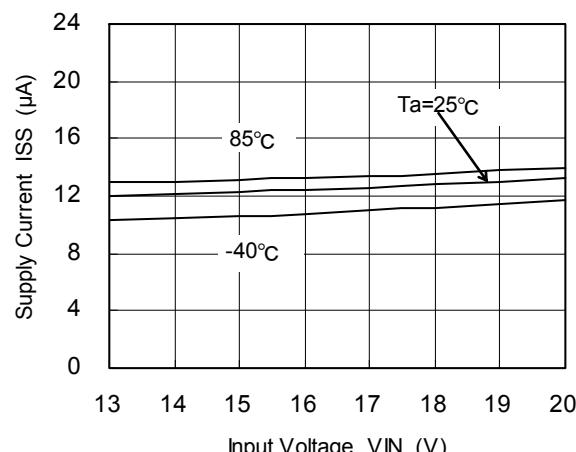

(5) Output Voltage vs. Ambient Temperature

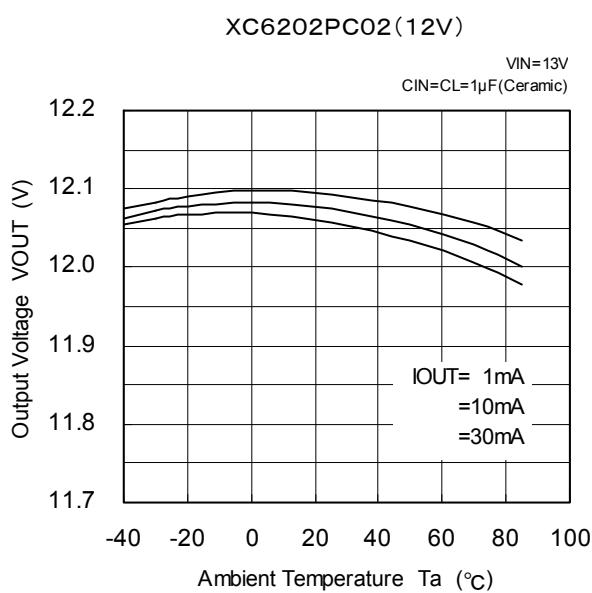


(6) Supply Current vs. Ambient Temperature

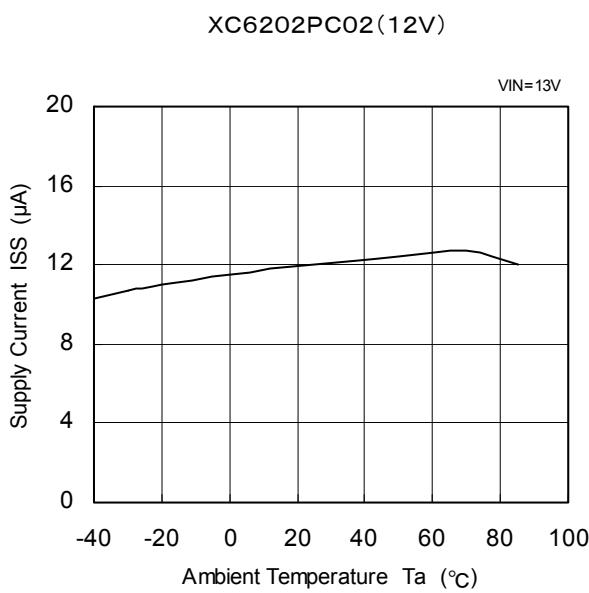


■ TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

● XC6202PC02 (Continued)


(7) Input Transient Response 1

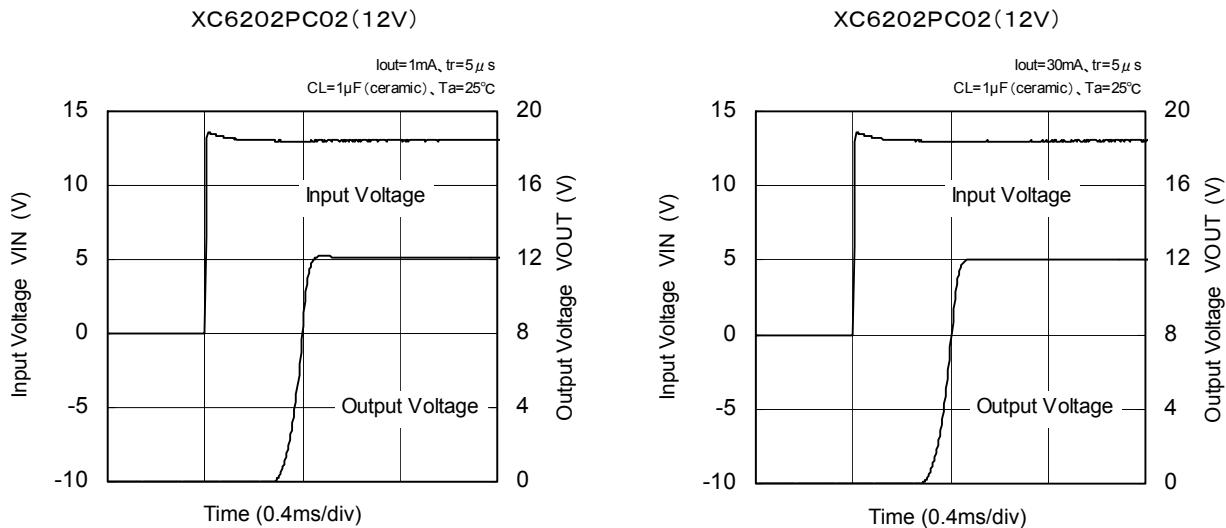

(8) Input Transient Response 2

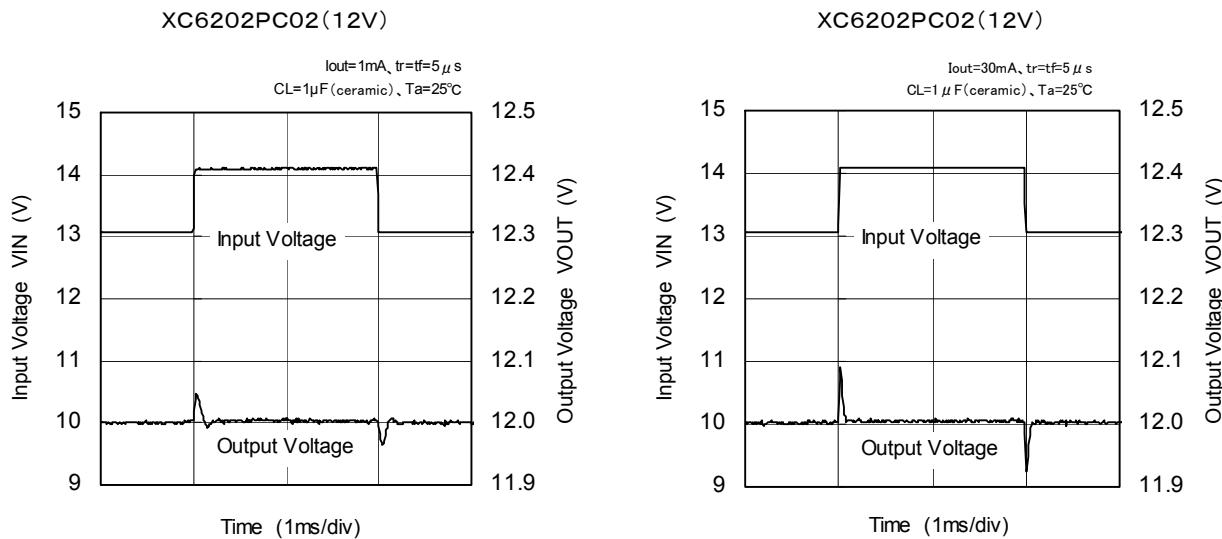




(9) Load Transient Response

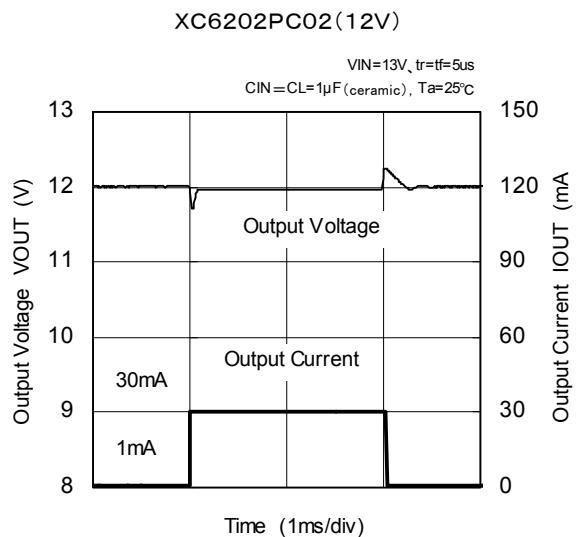

■ TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

● XC6202PC02 (Continued)



(10) Ripple Rejection Rate

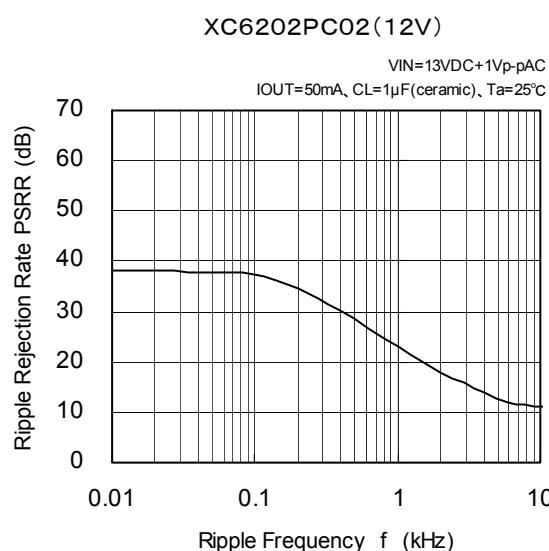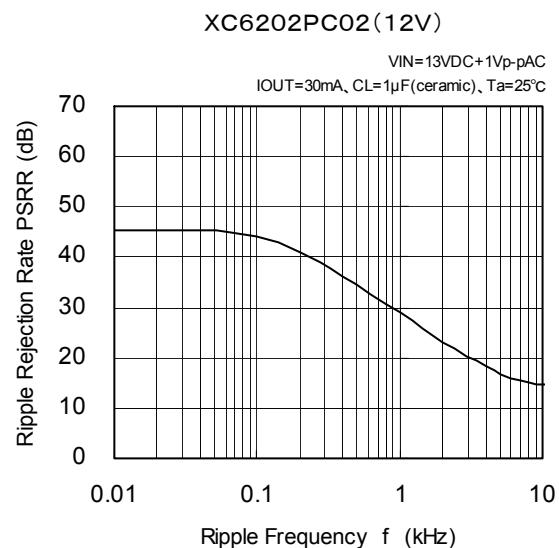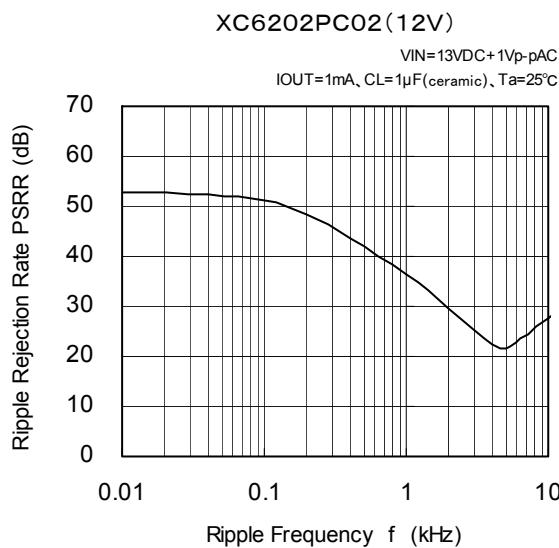


■ TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

● XC6202PJ02


(1) Output Voltage vs. Output Current

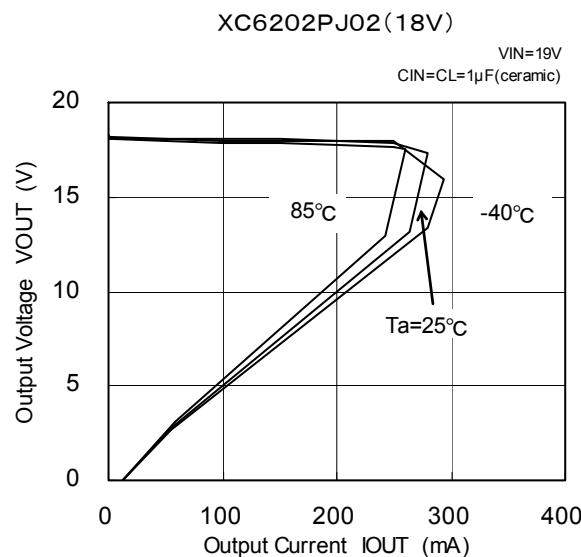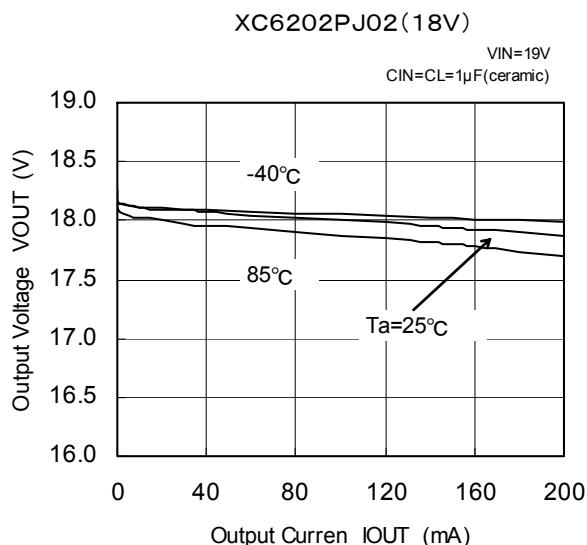


(2) Output Voltage vs. Input Voltage

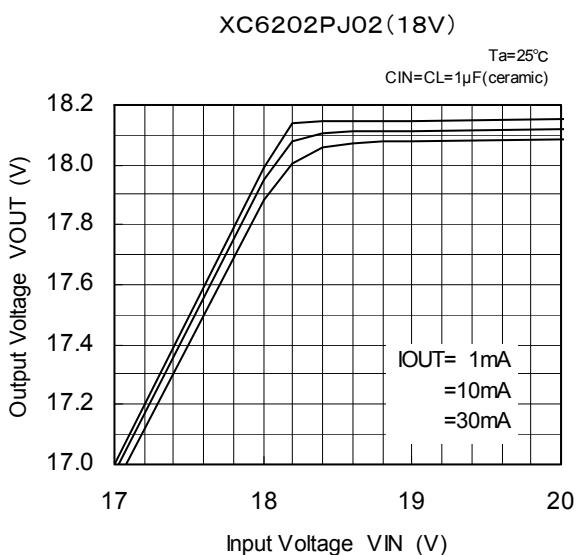


(3) Dropout Voltage vs. Output Current

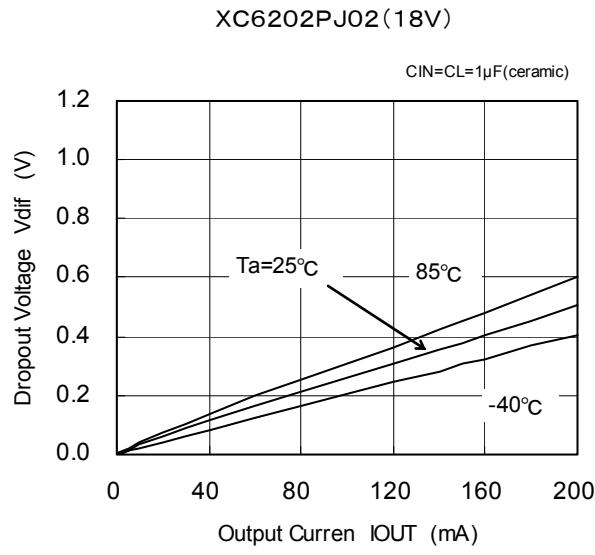

(4) Supply Current vs. Input Voltage

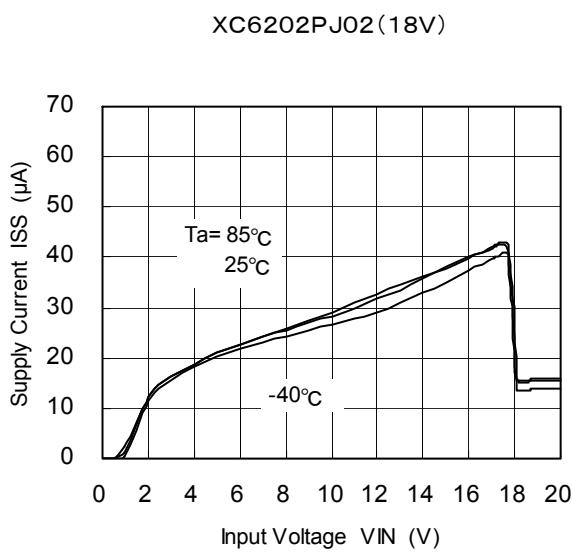

(5) Output Voltage vs. Ambient Temperature

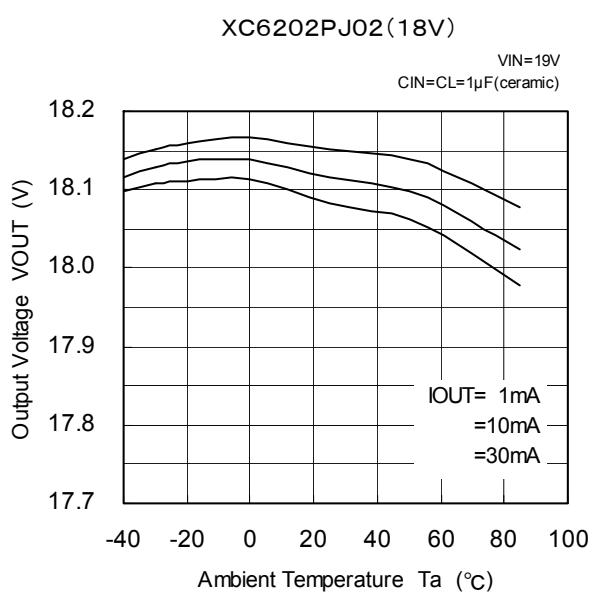


■ TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

● XC6202PJ02 (Continued)


(6) Supply Current vs. Ambient Temperature

XC6202PJ02(18V)

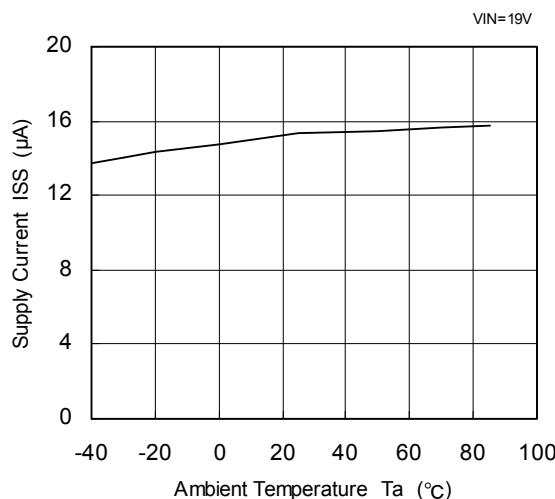


(7) Input Transient Response 1

XC6202PJ02(18V)

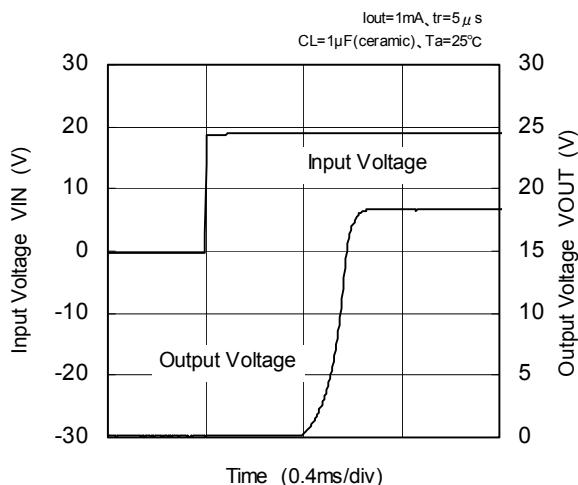


XC6202PJ02(18V)

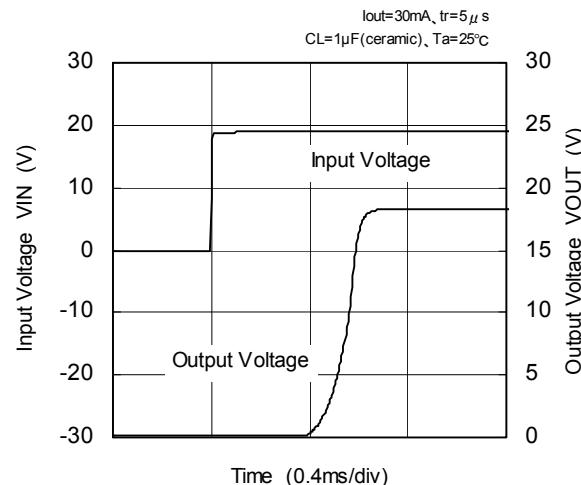


(8) Input Transient Response 2

XC6202PJ02(18V)

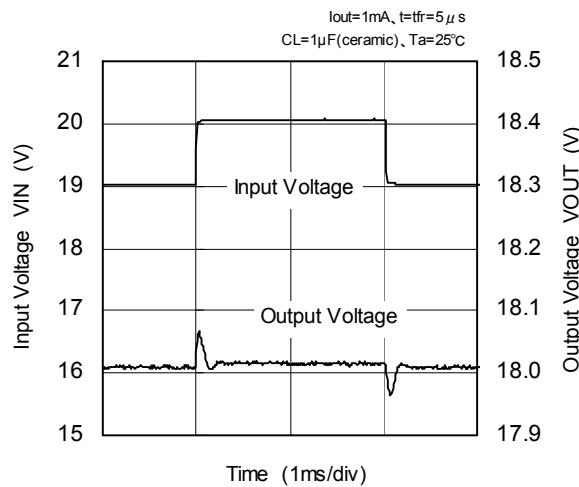

XC6202PJ02(18V)

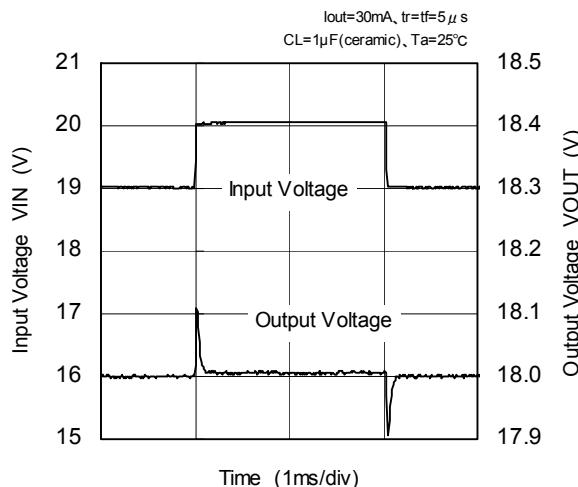


■ TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

● XC6202PJ02 (Continued)

(9) Load Transient Response


XC6202PJ02(18V)

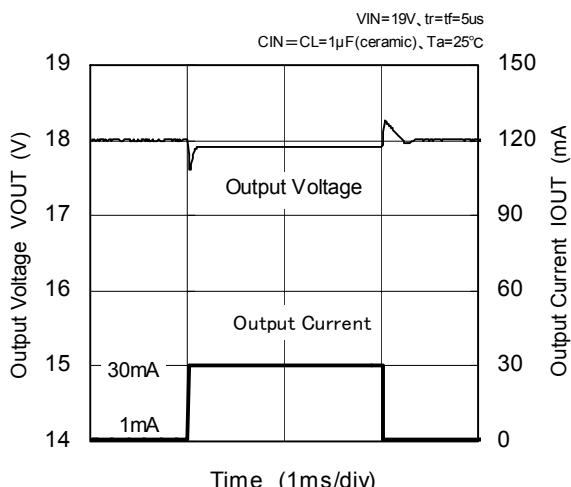

(10) Ripple Rejection Rate


XC6202PJ02(18V)

V_{IN}=19VDC+1Vp-pAC
I_{OUT}=1mA, CL=1μF(ceramic), Ta=25°C

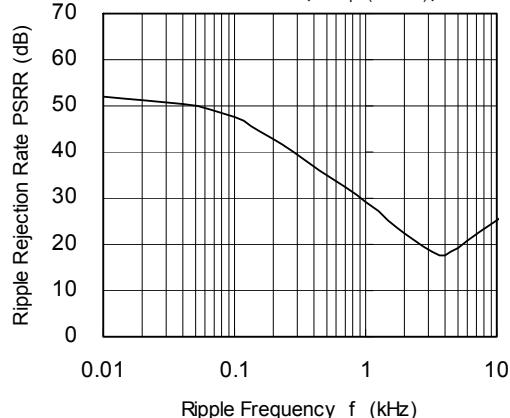


XC6202PJ02(18V)

V_{IN}=19VDC+1Vp-pAC
I_{OUT}=30mA, CL=1μF(ceramic), Ta=25°C

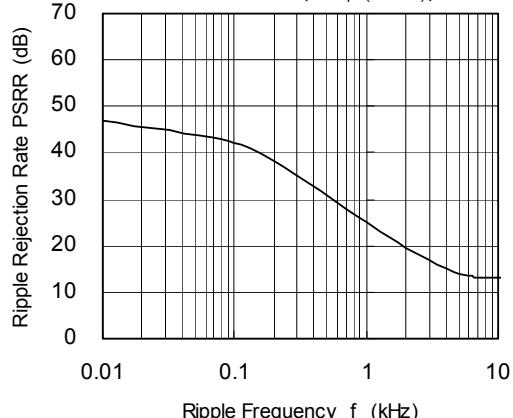


XC6202PJ02(18V)

V_{IN}=19VDC+1Vp-pAC
I_{OUT}=50mA, CL=1μF(ceramic), Ta=25°C

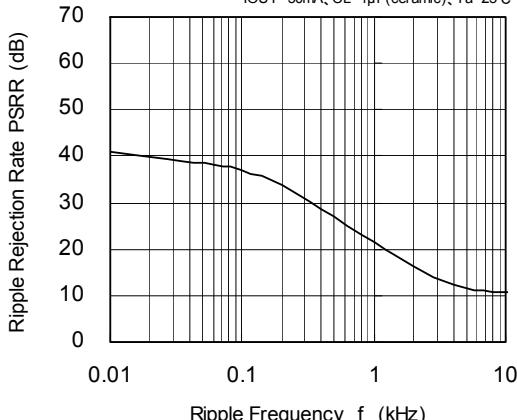


■ PACKAGING INFORMATION

●SOT-23

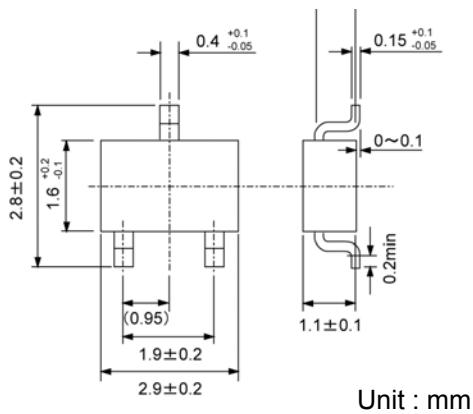


● SOT-89

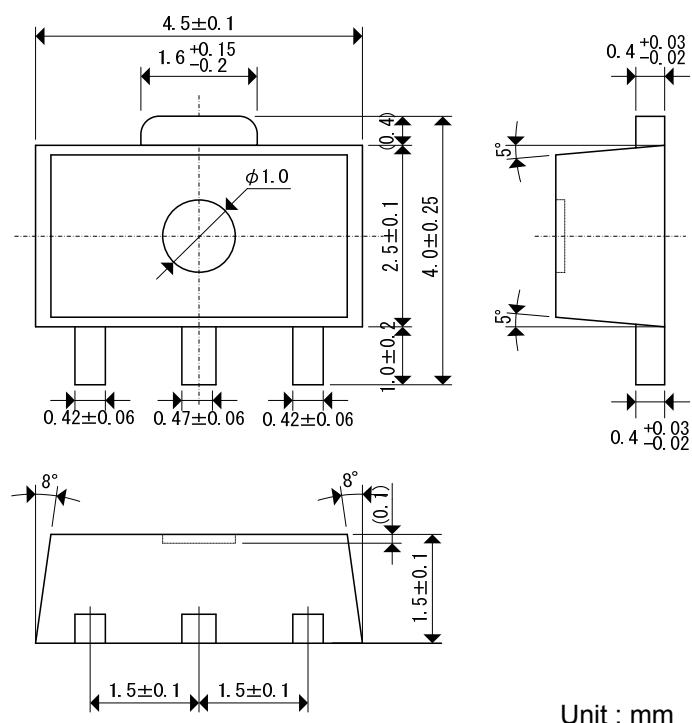


■PACKAGING INFORMATION (Continued)

●TO-92



Paper type

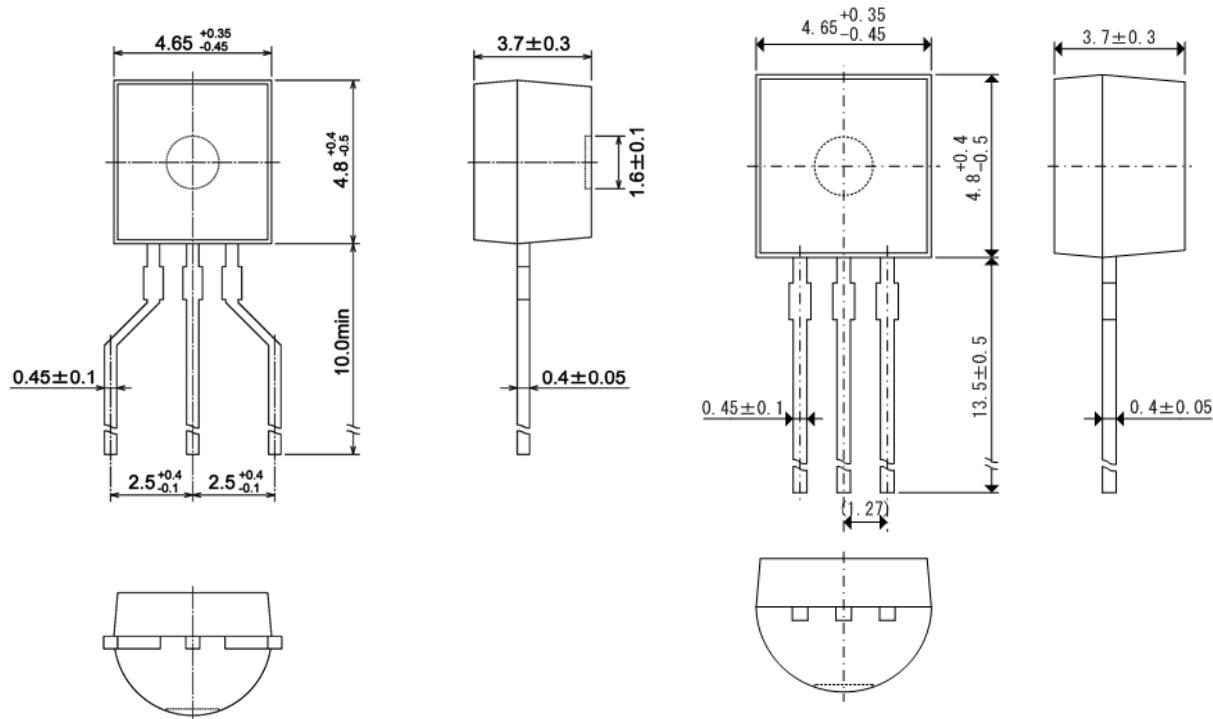

Bag

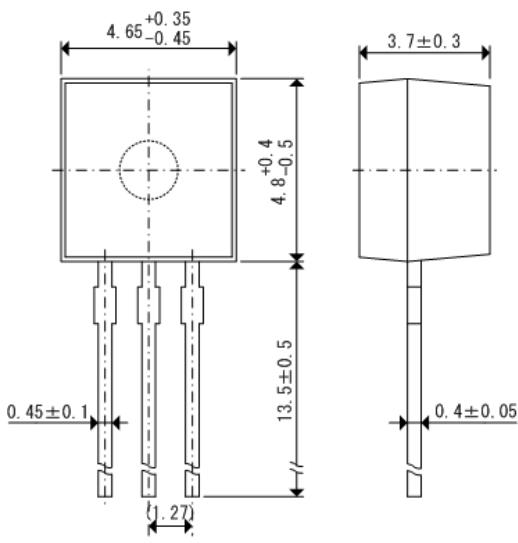


●SOT-223

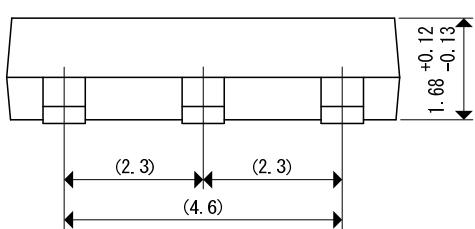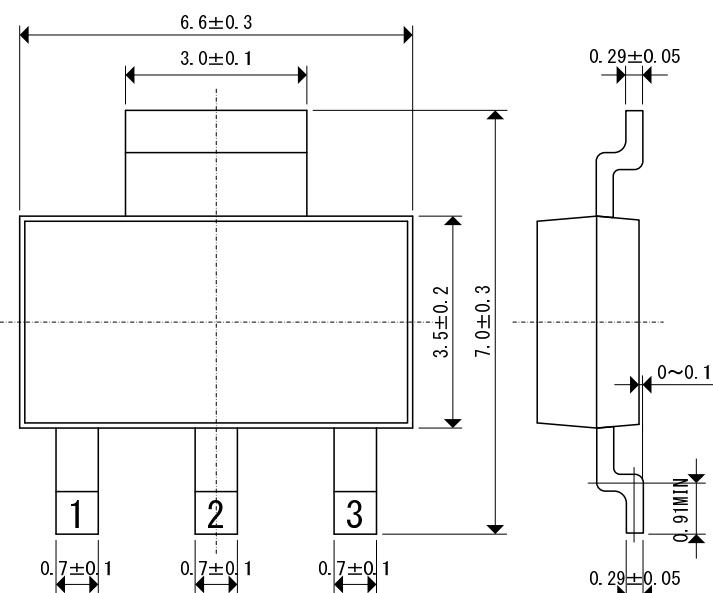


Unit : mm

■PACKAGING INFORMATION (Continued)


●USP-6B

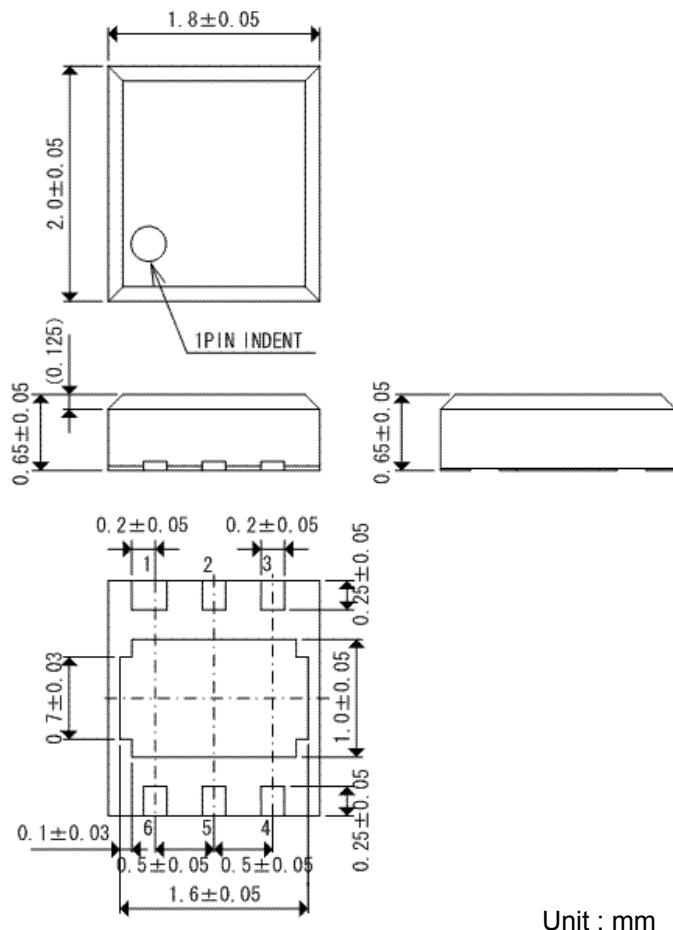

●USP-6B Recommended Pattern Layout

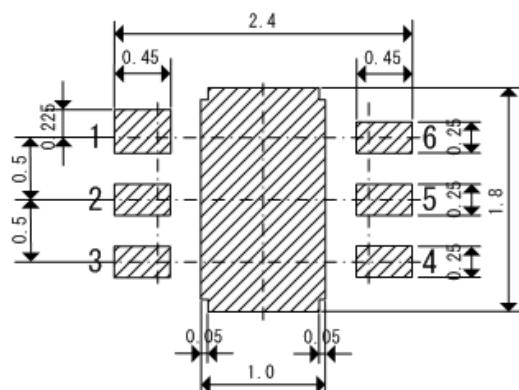


●USP-6B Recommended Metal Mask Design

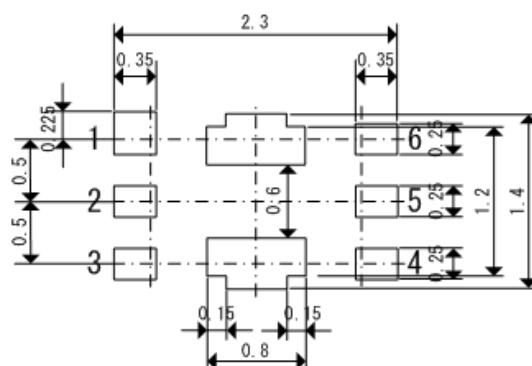


■ MARKING RULE


- SOT-23, SOT-89, SOT-223



SOT-23
(TOP VIEW)



SOT-89
(TOP VIEW)

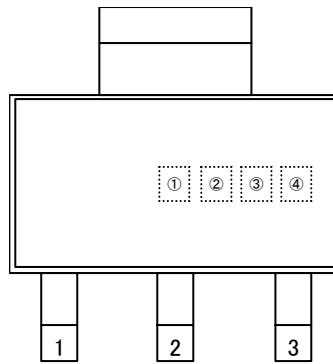

SOT-223
(TOP VIEW)

① represents product series

MARK	PRODUCT SERIES
2	XC6202Pxxxxx

② represents output voltage range

MARK	VOLTAGE (V)	PRODUCT SERIES
4	0.1 ~ 3.0	XC6202Pxxxxx
5	3.1 ~ 6.0	
6	6.1 ~ 9.0	
7	9.1 ~ 12.0	
8	12.1 ~ 15.0	
9	15.1 ~ 18.0	

③ represents output voltage


MARK	VOLTAGE (V)						MARK	VOLTAGE (V)							
	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E
0	—	3.1	6.1	9.1	12.1	15.1	F	—	4.6	7.6	10.6	13.6	16.6		
1	—	3.2	6.2	9.2	12.2	15.2	H	—	4.7	7.7	10.7	13.7	16.7		
2	—	3.3	6.3	9.3	12.3	15.3	K	1.8	4.8	7.8	10.8	13.8	16.8		
3	—	3.4	6.4	9.4	12.4	15.4	L	1.9	4.9	7.9	10.9	13.9	16.9		
4	—	3.5	6.5	9.5	12.5	15.5	M	2.0	5.0	8.0	11.0	14.0	17.0		
5	—	3.6	6.6	9.6	12.6	15.6	N	2.1	5.1	8.1	11.1	14.1	17.1		
6	—	3.7	6.7	9.7	12.7	15.7	P	2.2	5.2	8.2	11.2	14.2	17.2		
7	—	3.8	6.8	9.8	12.8	15.8	R	2.3	5.3	8.3	11.3	14.3	17.3		
8	—	3.9	6.9	9.9	12.9	15.9	S	2.4	5.4	8.4	11.4	14.4	17.4		
9	—	4.0	7.0	10.0	13.0	16.0	T	2.5	5.5	8.5	11.5	14.5	17.5		
A	—	4.1	7.1	10.1	13.1	16.1	U	2.6	5.6	8.6	11.6	14.6	17.6		
B	—	4.2	7.2	10.2	13.2	16.2	V	2.7	5.7	8.7	11.7	14.7	17.7		
C	—	4.3	7.3	10.3	13.3	16.3	X	2.8	5.8	8.8	11.8	14.8	17.8		
D	—	4.4	7.4	10.4	13.4	16.4	Y	2.9	5.9	8.9	11.9	14.9	17.9		
E	—	4.5	7.5	10.5	13.5	16.5	Z	3.0	6.0	9.0	12.0	15.0	18.0		

④ represents production lot number

0 to 9, A to Z reversed character 0 to 9, A to Z repeated. (G, I, J, O, Q, W excluded)

■ MARKING RULE(Continued)

● TO-92

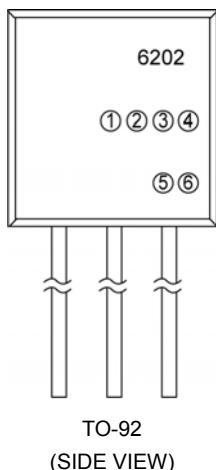

① represents type of regulator

MARK	PRODUCT SERIES
P	XC6202Pxxxxx

② represents integer of the output voltage

MARK	VOLTAGE (V)	PRODUCT SERIES	MARK	VOLTAGE (V)	PRODUCT SERIES
1	1.x	XC6202P1xxxx	A	10.x	XC6202PAxxxx
2	2.x	XC6202P2xxxx	B	11.x	XC6202PBxxxx
3	3.x	XC6202P3xxxx	C	12.x	XC6202PCxxxx
4	4.x	XC6202P4xxxx	D	13.x	XC6202PDxxxx
5	5.x	XC6202P5xxxx	E	14.x	XC6202PExxxx
6	6.x	XC6202P6xxxx	F	15.x	XC6202PFxxxx
7	7.x	XC6202P7xxxx	G	16.x	XC6202PGxxxx
8	8.x	XC6202P8xxxx	H	17.x	XC6202PHxxxx
9	9.x	XC6202P9xxxx	J	18.x	XC6202PJxxxx

③ represents decimal number of output voltage

MARK	VOLTAGE (V)	PRODUCT SERIES
3	x.3	XC6202Px3xxx
0	x.0	XC6202Px0xxx

④ represents detect voltage accuracy

MARK	DETECT VOLTAGE ACCURACY	PRODUCT SERIES
2	Within $\pm 2\%$	XC6202Pxx2xx
1	Within $\pm 1\%$	XC6202Pxx1xx

⑤ represents a least significant digit of production year

MARK	PRODUCTION YEAR
3	2003
4	2004


⑥ represents production lot number

0 to 9, A to Z repeated (G, I, J, O, Q, W excluded)

Note: No character inversion used.

■ MARKING RULE (Continued)

● USP-6B



①② represents product series

MARK		PRODUCT SERIES
①	②	
0	2	XC6202PxxxxDx

③ represents type of regulator

MARK	PRODUCT SERIES
P	XC6202Pxxxxxx

④ represents integer of the output voltage

MARK	VOLTAGE (V)	PRODUCT SERIES	MARK	VOLTAGE (V)	PRODUCT SERIES
1	1.x	XC6202P1xxDx	A	10.x	XC6202PAxxDx
2	2.x	XC6202P2xxDx	B	11.x	XC6202PBxxDx
3	3.x	XC6202P3xxDx	C	12.x	XC6202PCxxDx
4	4.x	XC6202P4xxDx	D	13.x	XC6202PDxxDx
5	5.x	XC6202P5xxDx	E	14.x	XC6202PExxDx
6	6.x	XC6202P6xxDx	F	15.x	XC6202PFxxDx
7	7.x	XC6202P7xxDx	G	16.x	XC6202PGxxDx
8	8.x	XC6202P8xxDx	H	17.x	XC6202PHxxDx
9	9.x	XC6202P9xxDx	J	18.x	XC6202PJxxDx

⑤ represents decimal number of output voltage

MARK	VOLTAGE (V)	PRODUCT SERIES
3	X.3	XC6202Px3xDx
0	X.0	XC6202Px0xDx

⑥ represents production lot number

0 to 9, A to Z repeated (G, I, J, O, Q, W excluded)

Note: No character inversion used.

1. The products and product specifications contained herein are subject to change without notice to improve performance characteristics. Consult us, or our representatives before use, to confirm that the information in this datasheet is up to date.
2. We assume no responsibility for any infringement of patents, patent rights, or other rights arising from the use of any information and circuitry in this datasheet..
3. Please ensure suitable shipping controls (including fail-safe designs and aging protection) are in force for equipment employing products listed in this datasheet.
4. The products in this datasheet are not developed, designed, or approved for use with such equipment whose failure of malfunction can be reasonably expected to directly endanger the life of, or cause significant injury to, the user.
(e.g. Atomic energy; aerospace; transport; combustion and associated safety equipment thereof.)
5. Please use the products listed in this datasheet within the specified ranges.
Should you wish to use the products under conditions exceeding the specifications, please consult us or our representatives.
6. We assume no responsibility for damage or loss due to abnormal use.
7. All rights reserved. No part of this datasheet may be copied or reproduced without the prior permission of TOREX SEMICONDUCTOR LTD.

TOREX SEMICONDUCTOR LTD.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for LDO Voltage Regulators category:

Click to view products by Torex Semiconductor manufacturer:

Other Similar products are found below :

[AP7363-SP-13](#) [L79M05TL-E](#) [AP7362-HA-7](#) [PT7M8202B12TA5EX](#) [TCR3DF185,LM\(CT\)](#) [TCR3DF45,LM\(CT\)](#) [TLE4473G V52](#)
[NCP4687DH15T1G](#) [701326R](#) [NCV8170AXV250T2G](#) [AP7315-25W5-7](#) [AP2111H-1.2TRG1](#) [ZLDO1117QK50TC](#) [AZ1117ID-ADJTRG1](#)
[TCR3DG12,LF](#) [MIC5514-3.3YMT-T5](#) [SCD7912BTG](#) [NCP154MX180270TAG](#) [SCD33269T-5.0G](#) [NCV8170BXV330T2G](#)
[NCV8170BMX330TCG](#) [NCV8170AMX120TCG](#) [NCP706ABMX300TAG](#) [NCP114BMX075TCG](#) [MC33269T-3.5G](#) [TCR3DG33,LF](#)
[TLE4471GXT](#) [TCR4DG35,LF](#) [TAR5S15U\(TE85L,F\)](#) [TCR3UG19A,LF](#) [TCR4DG105,LF](#) [MPQ2013AGG-5-P](#) [NCV8170AMX360TCG](#)
[AP7315-33SA-7](#) [TLE4268GSXUMA2](#) [NCP715SQ15T2G](#) [MIC5317-3.0YD5-T5](#) [NCV563SQ18T1G](#) [NCP715MX30TBG](#)
[NCV8702MX25TCG](#) [NCV8170BXV120T2G](#) [MIC5317-1.2YD5-T5](#) [NCV8170AMX150TCG](#) [NCV8170BMX150TCG](#) [AP2213D-3.3TRG1](#)
[NCV8170BMX120TCG](#) [NCV8170BMX310TCG](#) [NCV8170BMX360TCG](#) [MIC5514-1.2YMT-T5](#) [NCV8170BMX280TCG](#)