

- Ultra compact 15 Watt converter in DIP-16 metal casing
- Special heatsink-case design for maximized temperature capabilities
- Operating temperature range -40°C to +70°C without derating
- Wide 4:1 input voltage ranges: 9-36, 18-75 VDC
- High efficiency (up to 87%) for low thermal loss
- 6-side shielded metal case with insulated baseplate
- Built-In EN 55032 class A filter (conducted)
- Protection against short circuit
- 3-year product warranty



The TEL 15WIN-HS is a series of isolated 15 Watt converters which come in an ultra compact DIP-16 metal package with a special heatsink-case design for extended temperature capabilities. The design purpose of this series was to maximize temperature capabilities within the standard DIP-16 footprint. The TEL 15WIN-HS offers a wide 4:1 input voltage range and features a high efficiency of up to 87% which together with the integrated heatsink casing enables an operation temperature of up to +70°C at full load and up to 85°C with 50% load. The converters also have an internal input filter to comply with conducted emission standard EN 55032 class A. It's an economical solution for space critical and cost sensitive applications in instrumentation, IT and industrial electronics where operating temperature range is critical factor.

Models

Order Code	Input Voltage Range	Output 1		Output 2		Efficiency typ.
		Vnom	I _{max}	Vnom	I _{max}	
TEL 15-2411WIN-HS	9 - 36 VDC (24 VDC nom.)	5.1 VDC	2'940 mA			86 %
TEL 15-2412WIN-HS		12 VDC	1'250 mA			87 %
TEL 15-2413WIN-HS		15 VDC	1'000 mA			87 %
TEL 15-2415WIN-HS		24 VDC	625 mA			87 %
TEL 15-2422WIN-HS		+12 VDC	625 mA	-12 VDC	-625 mA	87 %
TEL 15-2423WIN-HS		+15 VDC	500 mA	-15 VDC	-500 mA	87 %
TEL 15-4811WIN-HS	18 - 75 VDC (48 VDC nom.)	5.1 VDC	2'940 mA			86 %
TEL 15-4812WIN-HS		12 VDC	1'250 mA			87 %
TEL 15-4813WIN-HS		15 VDC	1'000 mA			87 %
TEL 15-4815WIN-HS		24 VDC	625 mA			87 %
TEL 15-4822WIN-HS		+12 VDC	625 mA	-12 VDC	-625 mA	87 %
TEL 15-4823WIN-HS		+15 VDC	500 mA	-15 VDC	-500 mA	87 %

Note - 48 Vin models: If the input will be switched electromechanically, use an external 27 µF / 200 V / KXY capacitor to avoid voltage transient.

Input Specifications

Input Current	- At no load	24 Vin models: 10 mA typ. 48 Vin models: 7 mA typ.
	- At full load	24 Vin models: 720 mA typ. 48 Vin models: 360 mA typ.
Surge Voltage		24 Vin models: 50 VDC max. (1 s max.) 48 Vin models: 100 VDC max. (1 s max.)
Input Inrush Current		36.6 A typ. (24 Vin models) 34.2 A typ. (48 Vin models)
Under Voltage Lockout		24 Vin models: 8 VDC typ. 48 Vin models: 16 VDC typ.
Recommended Input Fuse		24 Vin models: 3'000 mA (slow blow) 48 Vin models: 1'500 mA (slow blow) (The need of an external fuse has to be assessed in the final application.)
Input Filter		Internal Pi-Type

Output Specifications

Voltage Set Accuracy		±1% max.
Regulation	- Input Variation (Vmin - Vmax)	single output models: 0.8% max. dual output models: 0.8% max.
	- Load Variation (0 - 100%)	single output models: 1% max. dual output models: 1% max. (Output 1) 1% max. (Output 2)
	- Voltage Balance (symmetrical load)	dual output models: 2% max.
	- Cross Regulation (25% / 100% asym. load)	dual output models: 5% max.
Ripple and Noise	- 20 MHz Bandwidth	70 mVp-p typ. (w/ 2.2 µF / 50 V MLCC)
Capacitive Load	- single output	5.1 Vout models: 1'800 µF max. 12 Vout models: 820 µF max. 15 Vout models: 820 µF max. 24 Vout models: 270 µF max.
	- dual output	12 / -12 Vout models: 560 / 560 µF max. 15 / -15 Vout models: 270 / 270 µF max.
Minimum Load		Not required
Temperature Coefficient		±0.02 %/K max.
Start-up Time		30 ms typ.
Short Circuit Protection		Continuous, Automatic recovery (Hiccup Mode, Automatic Recovery)
Output Current Limitation		110% min. of Iout max. 160% typ. of Iout max.
Transient Response	- Response Deviation	3% typ. / 5% max. (75% to 100% Load Step)
	- Response Time	500 µs max. (75% to 100% Load Step)

Safety Specifications

Safety Standards	- IT / Multimedia Equipment	EN 62368-1 IEC 62368-1 UL 62368-1
	- Certification Documents	www.tracopower.com/overview/tel15win-hs
Pollution Degree		PD 3
Over Voltage Category		Not mains connected

All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

EMC Specifications

EMI Emissions	- Conducted Emissions	EN 55032 class A (internal filter) EN 55032 class B (internal filter)
	- Radiated Emissions	EN 55032 class A (with external filter) EN 55032 class B (with external filter)
		External filter proposal: www.tracopower.com/overview/tel15win-hs
EMS Immunity		EN 55024 (IT Equipment) EN 55035 (Multimedia)
	- Electrostatic Discharge	Air: EN 61000-4-2, ±8 kV, perf. criteria A Contact: EN 61000-4-2, ±6 kV, perf. criteria A
	- RF Electromagnetic Field	EN 61000-4-3, 20 V/m, perf. criteria A
	- EFT (Burst) / Surge	EN 61000-4-4, ±2 kV, perf. criteria A EN 61000-4-5, ±2 kV, perf. criteria A
		External filter proposal: www.tracopower.com/overview/tel15win-hs
	- Conducted RF Disturbances - PF Magnetic Field	EN 61000-4-6, 10 Vrms, perf. criteria A Continuous: EN 61000-4-8, 30 A/m, perf. criteria A

General Specifications

Relative Humidity		95% max. (non condensing)
Temperature Ranges	- Operating Temperature	-40°C to +85°C
	- Case Temperature	+110°C max.
	- Storage Temperature	-50°C to +125°C
Power Derating	- High Temperature	See application note: www.tracopower.com/overview/tel15win-hs
Cooling System		Natural convection (20 LFM)
Altitude During Operation		6'000 m max.
Switching Frequency		480 kHz typ. (PWM)
Insulation System		Functional Insulation
Isolation Test Voltage	- Input to Output, 60 s	1'500 VDC
	- Input to Output, 1 s	1'800 VDC
	- Input to Case, 60 s	1'000 VDC
	- Output to Case, 60 s	1'000 VDC
Isolation Resistance	- Input to Output, 500 VDC	1'000 MΩ min.
Isolation Capacitance	- Input to Output, 100 kHz, 1 V	2'200 pF max.
Reliability	- Calculated MTBF	2'000'000 h (MIL-HDBK-217F, ground benign)
Washing Process		Allowed (hermetical product)
		See Cleaning Guideline: www.tracopower.com/info/cleaning.pdf
Environment	- Vibration	2.4 g, 3 axis, random waveform, 30 min
	- Mechanical Shock	30 g, 3 axis, half sine, 11 ms
	- Thermal Shock	IPC-9592B
Housing Material		Aluminum
Potting Material		Silicone (UL 94 V-0 rated)
Pin Material		Copper Alloy (C6801)
Pin Foundation Plating		Nickel (2 - 4 μm)
Pin Surface Plating		Tin (3 - 5 μm), matte
Housing Type		Metal Case
Mounting Type		PCB Mount
Connection Type		THD (Through-Hole Device)
Footprint Type		DIP16
Soldering Profile		Wave Soldering
		260°C / 10 s max.
Weight		14.2 g
Thermal Impedance	- Case to Ambient	18.4 K/W typ.

All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

Environmental Compliance - REACH Declaration

www.tracopower.com/info/reach-declaration.pdf

REACH SVHC list compliant

REACH Annex XVII compliant

- RoHS Declaration

www.tracopower.com/info/rohs-declaration.pdf

Exemptions: 7a


(RoHS exemptions refer to the component concentration only, not to the overall concentration in the product (O5A rule).
The SCIP number is provided on request.)

Supporting Documents

Overview Link (for additional Documents)

www.tracopower.com/overview/tel15win-hs

Outline Dimensions

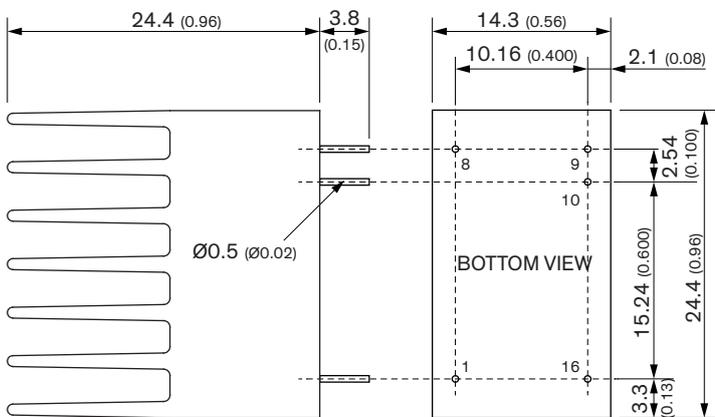

Pinout		
Pin	Single	Dual
1	-Vin	
8	NC	Common
9	+Vout	
10	-Vout	
16	+Vin	

NC: Not connected

Dimensions in mm (inch)

Tolerances: X.X ±0.5 (X.XX ±0.02)

X.XX ±0.25 (X.XXX ±0.01)

Pin diameter tolerances: X.X ±0.05 (X.XX ±0.002)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Isolated DC/DC Converters - Through Hole](#) category:

Click to view products by [TRACO Power](#) manufacturer:

Other Similar products are found below :

[F1515XT-2WR3](#) [WRF0505S-3WR2](#) [K7815M-1000R3](#) [B1215S-3WR2](#) [R-78E3.3-0.5](#) [K7812M-1000R3](#) [B0509XT-1WR3](#) [B0524XT-1WR3](#)
[B1203XT-1WR3](#) [B1524S-3WR2](#) [B2424S-3WR2](#) [F0524D-2WR2](#) [B1212S-1W](#) [A1215S-2WR3](#) [F1205XT-1WR3](#) [F0303XT-1WR3](#) [F0505D-1WR2](#) [K7805-500](#) [B0305S-1W](#) [F0509XT-1WR3](#) [K7805-1000R3](#) [F2424XT-1WR3](#) [K7812-500R3](#) [G2415S-2WR3](#) [B2424LS-1WR3](#)
[B1205S-1W](#) [F1212S-3WR2](#) [R-78E12-0.5](#) [K7805M-1000R3](#) [B1224XT-1WR3](#) [H1205S-2WR2](#) [K7812-1000R3](#) [B1515S-2WR3](#) [B0505XT-2WR3](#) [F2424XT-2WR3](#) [B0505S-1WL](#) [F0505D-1WR3](#) [F1224D-2WR3](#) [B1205S-2W](#) [A2405S-1WR3](#) [B2415S-3WR2](#) [R-78E5.0-0.5](#) [R-78E9.0-0.5](#) [B1515S-3WR2](#) [F1205XT-2WR3](#) [B2424XT-1WR3](#) [B0503XT-2WR2](#) [B1505S-3WR2](#) [B1212XT-1WR3](#) [CCG10-24-15DF](#)