

Features

- ☒ Frequency range : 1MHz to 170MHz
- ☒ SMD seam sealing ceramic package
- ☒ Supply voltage : 1.8V ~ 3.3V
- ☒ CMOS output
- ☒ Tri-state function available
- ☒ External dimensions (mm)
L : 7.0 x W : 5.0 x H : 1.3
- ☒ RoHS compliant & Pb free

Applications

- ☒ Networking, Server, Storage
- ☒ Wireless communications
- ☒ Fibre channel, Ethernet, SATA, SAS, PCI-E, USB, WLAN, xDSL, xPON
- ☒ PC mainboard, Notebook, HDD, SSD, Graphics card, Computer peripherals
- ☒ Audio, Video, Gaming, Printer, DSC, IP CAM, Consumer products


Electrical Characteristics

Item	7W	Conditions
Frequency Range (F_0)	1MHz ~ 170MHz	
Frequency Stability (F_{stab})	$\pm 50\text{ppm}$, $\pm 30\text{ppm}$, $\pm 25\text{ppm}$	Note [1]
Operating Temperature Range (T_{OTR})	$-40^\circ\text{C} \sim +85^\circ\text{C}$	
Supply Voltage (V_{DD})	1.8V, 2.5V, 3.3V	$V_{DD} \pm 10\%$
Current Consumption (I_{DD})	10 mA Max.	1MHz ~ 75MHz
	20 mA Max.	75MHz ~ 170MHz
Output Type	CMOS	
Output Load (C_L)	15 pF	
Output Voltage High (V_{OH})	90% V_{DD} Min.	
Output Voltage Low (V_{OL})	10% V_{DD} Max.	
Rise & Fall Time (T_r / T_f)	8 ns Max.	10% ~ 90% of V_{DD}
Duty Cycle	40% ~ 60%	
Start-up Time	5 ms Max.	
Enable Voltage High, Logic "1"	70% V_{DD} Min.	Input to Pin1 Note [2]
Enable Voltage Low, Logic "0"	30% V_{DD} Max.	
Phase Jitter, RMS	1 ps Max.	Note [3]
Aging (F_{aging})	± 3 ppm Max.	at $25^\circ\text{C} \pm 3^\circ\text{C}$, first year
Storage Temperature Range (T_{STR})	$-55^\circ\text{C} \sim +125^\circ\text{C}$	

Notes:

- [1] Inclusive of frequency tolerance at 25°C , 1st year aging at 25°C , and variations over operating temperature, supply voltage, and load.
- [2] Output will be enabled if Pin1 is Logic "1" or open; Output will be disabled if Pin1 is Logic "0".
- [3] Freq. 10MHz~40MHz, integrated 12kHz~5MHz; Freq. >40MHz, integrated 12kHz~20MHz.

Dimensions

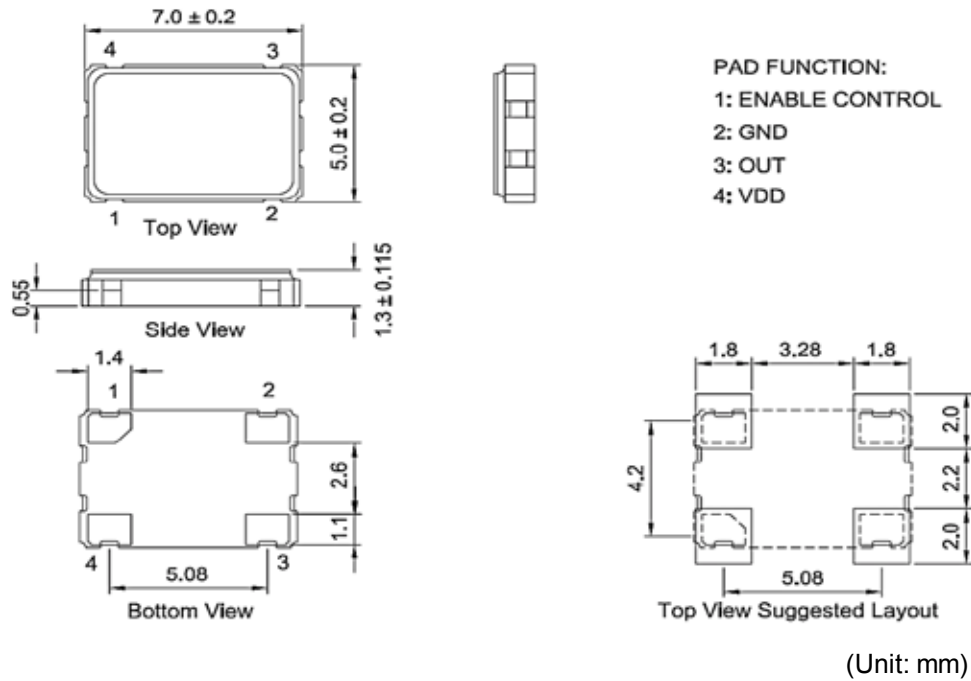

Ordering Information

7W

-

30.000M

B

E

-

T

Frequency in Hz

Please contact us for available frequencies

Supply Voltage

B 3.3 V

C 2.5 V

D 1.8 V

Packaging Method

T Tape & Reel


Frequency Stability

A ± 25 ppm (-10°C ~ +70°C)

D ± 25 ppm (-40°C ~ +85°C)

E ± 50 ppm (-40°C ~ +85°C)


Packing

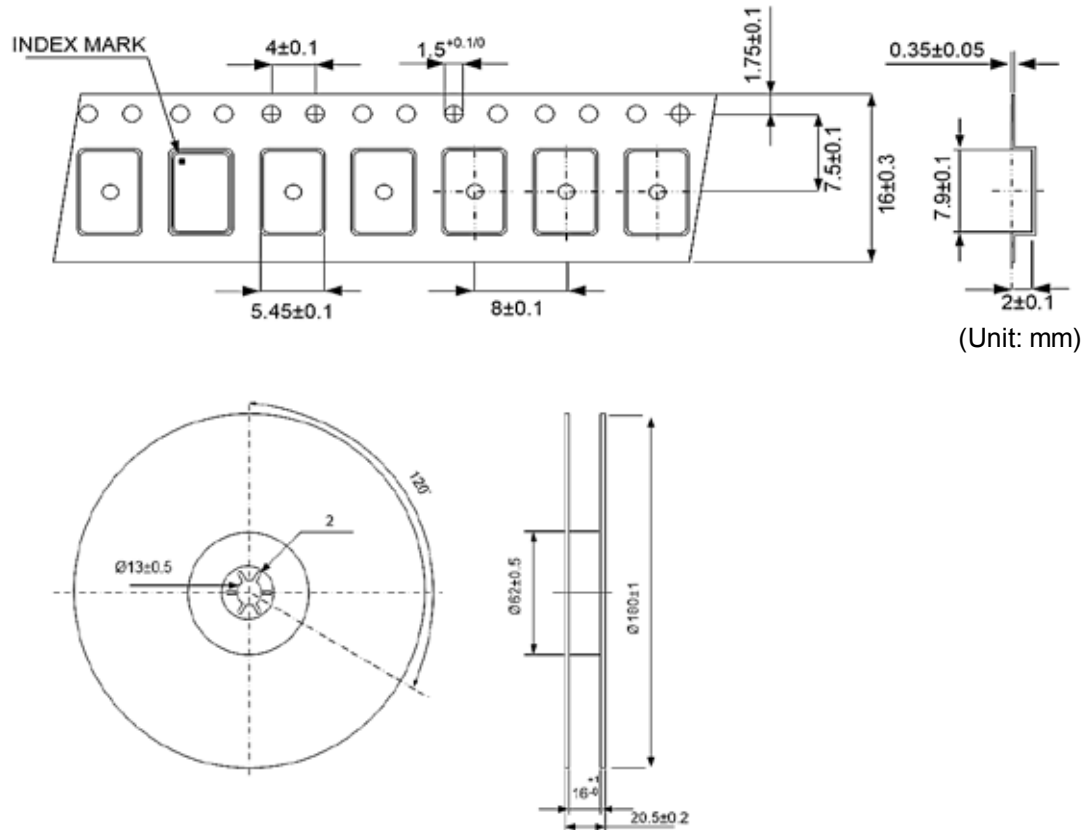

Reflow Profile

Solder melting point : $220^{\circ}\text{C} \pm 10^{\circ}\text{C}$, 60 sec. Min.

Peak temperature : $260^{\circ}\text{C} \pm 10^{\circ}\text{C}$, 10 sec. Min.

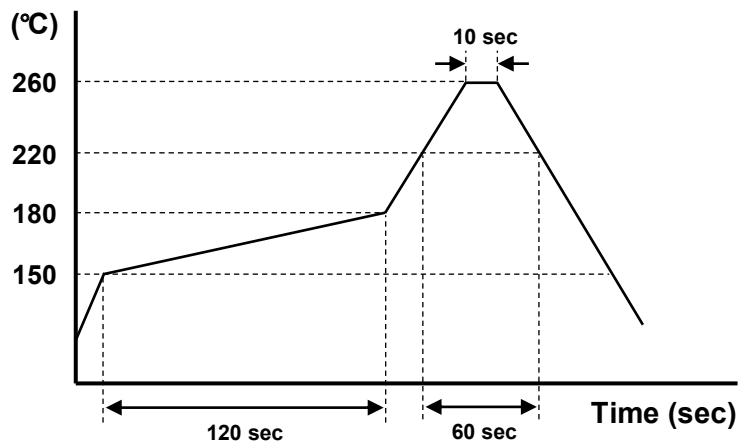

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Programmable Oscillators](#) ***category:***

Click to view products by [TXC Corporation](#) ***manufacturer:***

Other Similar products are found below :

[SG-8018CA-PWT BLANK](#) [548BCAB000121CCG](#) [544BAAC000159CCG](#) [549BAAB000112BCG](#) [544AAJC001967BCG](#) [SiT8008AI-32-33E-25.000000](#) [SIT9121AI-2B1-33E26.000000](#) [SIT8008BIA81-25N-8.000000](#) [7W48000600](#) [7CA0600601](#) [7C40000600](#) [7WA2530600](#) [7C29880600](#) [7W73700600](#) [7CA2500602](#) [7C12080600](#) [7WA5670601](#) [7W50000601](#) [7CA2500601](#) [7C50000603](#) [7W22170600](#) [7CA4870600](#) [7CA0600600](#) [7C66070600](#) [7WA2500601](#) [7CA0000600](#) [LTC6903CMS8#TRPBF](#) [570CBC000306DG](#) [ECS-3525-250-B-TR](#) [DSC6083CI2A-250K000](#) [DSC8123DI5T](#) [DSC8124DI2](#) [570CAC000141DG](#) [SIT2024BM-S1-XXX-000.FP0000G](#) [SIT8924BM-71-XXX-000.FP0000G](#) [570BBC000876DG](#) [DSC8001BI2T](#) [DSC6021CE1A-0026](#) [DSC8121DI2](#) [DSC8101CI2](#) [DSC8102DI5](#) [DSC8121CI2](#) [DSC8103CI5](#) [DSC8121AI2](#) [DSC8001BL5](#) [DSC8121CI5](#) [514LBA000586AAG](#) [514BCA000112AAG](#) [514LBA000586BAG](#) [514LBA000118BAG](#)