

Features

Frequency range : 1MHz to 40MHz
 SMD seam sealing ceramic package
 Supply voltage : 1.8V ~ 3.3V
 CMOS output
 Phase modulation clock function
 selectable for EMI reduction
 External dimensions (mm)
 L : 2.5 x W : 2.0 x H : 0.8
 RoHS compliant & Pb free

Applications

Imaging & Display Devices
 HD Camera, DVR
 HD Surveillance Camera
 Computer Peripherals
 Consumer products

Electrical Characteristics

Item	8WE	Conditions	
Frequency Range (F ₀)	1MHz ~ 40MHz		
Frequency Stability (F _{stab})	±50 ppm	Note [1] & [2]	
Operating Temperature Range (T _{OTR})	-40°C ~ +85°C		
	-40°C ~ +105°C		
	-40°C ~ +125°C		
Supply Voltage (V _{DD})	1.8V, 2.5V, 3.3V	V _{DD} ± 5%	
Current Consumption (I _{DD})	10 mA Max.		
Output Type	CMOS		
Output Load (C _L)	15 pF		
Output Voltage High (V _{OH})	80% V _{DD} Min.		
Output Voltage Low (V _{OL})	20% V _{DD} Max.		
Rise & Fall Time (T _r / T _f)	8 ns Max.	20% ~ 80% of V _{DD}	
Duty Cycle	45% ~ 55%		
Start-up Time	1 ms Max.		
Phase Jitter, RMS	1 ps Max.	Note [2] Integrated 12kHz~5MHz.	
Phase Modulation Clock Mode	Enable	30% V _{DD} Max. (Logic "0")	Input to Pin1; Note [3]
	Disable	70% V _{DD} Min. (Logic "1")	
Aging (F _{aging})	±3 ppm Max.	at 25°C±3°C, first year	
Storage Temperature Range (T _{STR})	-55°C ~ +125°C		

Notes:

- [1] Inclusive of frequency tolerance at 25°C, variations over operating temperature, supply voltage, load and 1st year aging at 25°C.
- [2] Phase modulation clock mode is disabled.
- [3] Phase modulation clock mode will be enabled if Pin1 is Logic "0"; Phase modulation clock mode will be disabled if Pin1 is Logic "1" or open (Internal pull-high resistor).


Phase Modulation Mode Deviation [4]

Frequency (MHz)	Deviation range (%)		
	V _{DD} 1.8V	V _{DD} 2.5V	V _{DD} 3.3V
20	± 0.54	± 0.36	± 0.29
24	± 0.62	± 0.42	± 0.34
25	± 0.65	± 0.45	± 0.35
27	± 0.70	± 0.54	± 0.40


Notes:

[4] Contact us for available frequencies and deviation range.


Dimensions

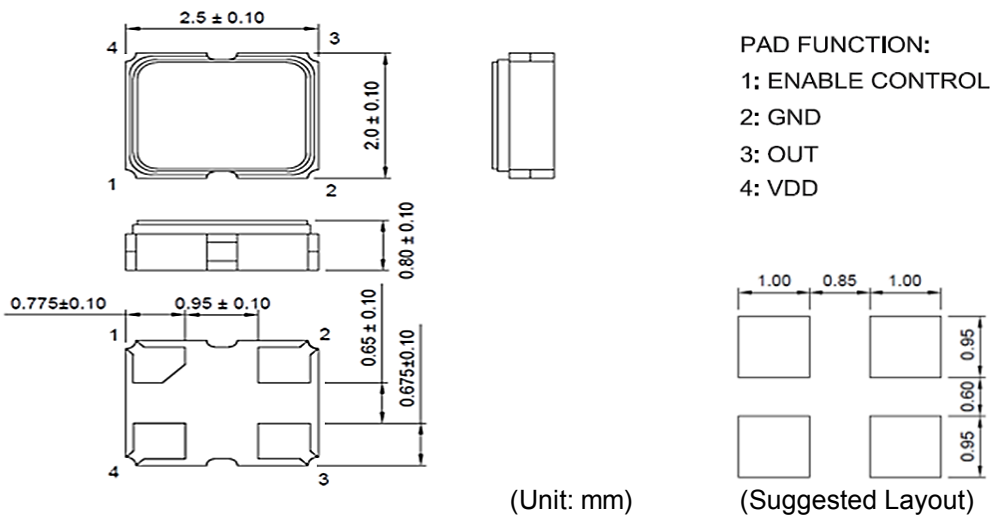

Ordering Information

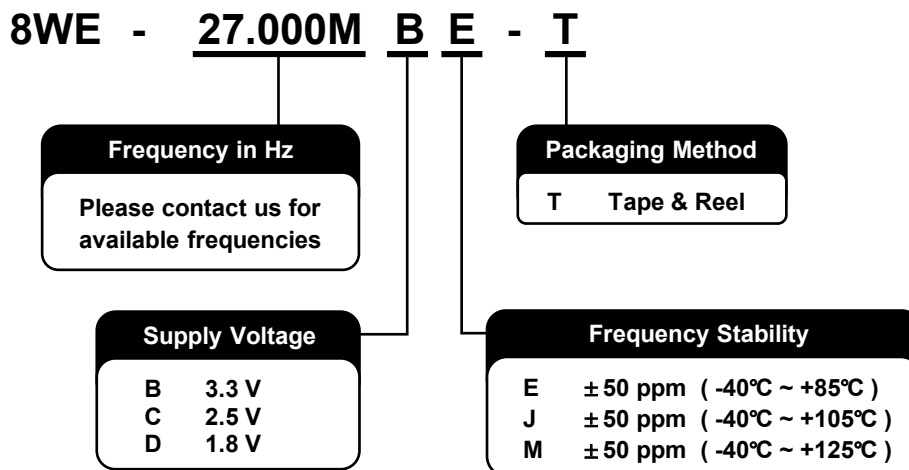


Packing

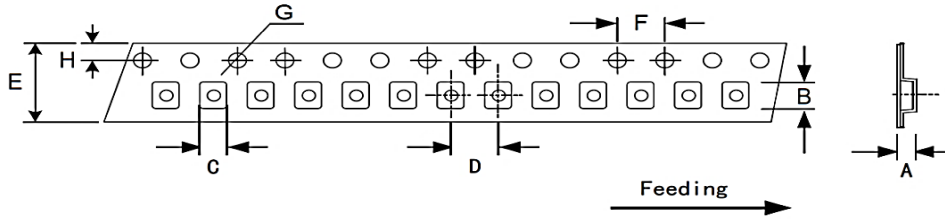

DIMENSIONS	A	B	C	D	E	F	G	H
	1.15 ±0.05	2.70 ±0.05	2.25 ±0.05	4.00 ±0.10	8.00 ±0.20	4.00 ±0.10	1.55 ±0.05	1.75 ±0.10

(Unit: mm)

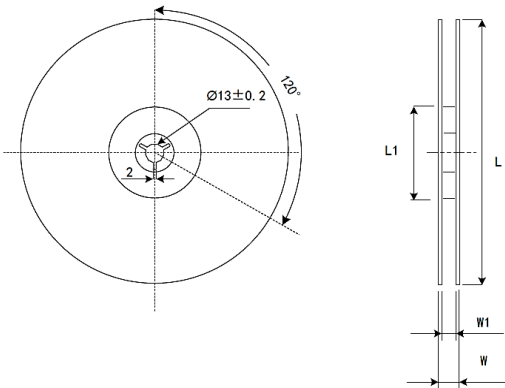


DIMENSIONS	L	L1	W	W1
	180 0/-3	60 +1/0	11.4 ±0.1	9 ±0.3

(Unit: mm)

Reflow Profile

Solder melting point : $220^{\circ}\text{C} \pm 10^{\circ}\text{C}$, 60 sec. Min.

Peak temperature : $260^{\circ}\text{C} \pm 10^{\circ}\text{C}$, 10 sec. Min.

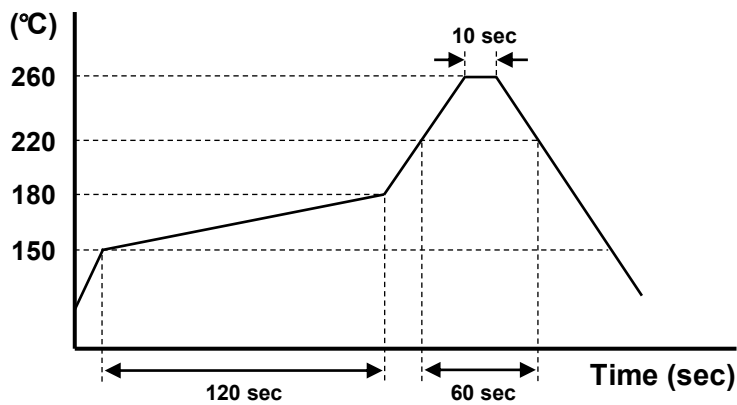

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Standard Clock Oscillators](#) category:

Click to view products by [TXC Corporation](#) manufacturer:

Other Similar products are found below :

[601252](#) [F335-25](#) [F535L-33.333](#) [F535L-50](#) [NBXDBB017LN1TAG](#) [NBXHBA019LN1TAG](#) [SiT1602BI-22-33E-50.000000E](#) [SiT8209AI-32-33E-125.000000](#) [SIT8918AA-11-33S-50.000000G](#) [F335-24](#) [F535L-12](#) [F535L-24](#) [SiT8503AI-18-33E-0.200000X](#) [SIT8918AA-11-33S-16.000000G](#) [SIT9122AI2C233E300.000000X](#) [9120AC-2D2-33E212.500000](#) [ASFL1-48.000MHZ-LC-T](#) [SIT8920AM-31-33E-25.0000](#) [9102AI-233N33E100.00000X](#) [9102AI-232H25S125.00000](#) [9102AI-133N25E200.00000](#) [3921AI-2CF-33NZ125.000000](#) [5730-1SF](#) [ASV-25.000MHZ-ECS-50-T](#) [EC3620ETTS-24.000M TR](#) [EC3925ETTS-100.000M TR](#) [SIT1602BC-83-33E-10.000000Y](#) [8003AI-12-33S-40.00000Y](#) [1602BI-13-33S-19.200000E](#) [8208AI-2F-18E-25.000000X](#) [8208AI-8F-33E-66.666666X](#) [NX7031E0125.000000](#) [SiT1602BI-23-33E-25.000000G](#) [SiT1602BI-23-18E-24.000000G](#) [SiT1602BC-13-33E-50.000000E](#) [NX51500001](#) [SiT1602BI-22-33E-12.000000E](#) [NX71C50003](#) [KN3270029](#) [SQPCIE100](#) [SiT1602BI-32-33E-50.000000X](#) [IC Socket for 2520 case](#) [SiT1602BI-22-33E-25.000000E](#) [SiT1602BI-12-33E-48.000000E](#) [IC Socket for 5032 case](#) [CCHD-575-25-24.000](#) [AX5DBF1-250.0000C](#) [AX5PAF1-250.0000C](#) [AX5PBF1-250.0000C](#) [AX5PAF1-266.0000C](#)