

### Features

Frequency range : 16MHz to 66MHz  
 Ceramic SMD package  
 Seam sealing  
 External dimensions (mm)  
 L : 2.0 x W : 1.6 x H : 0.5  
 RoHS compliant & Pb free

### Applications

Bluetooth, Wireless LAN  
 Microprocessor  
 Mobile phone, Computer, Modem  
 Audio, Video  
 Consumer products


### Electrical Characteristics

Item		8Y	Conditions
Frequency Range	$F_0$	16MHz ~ 66MHz	
Frequency Tolerance	$F_{tol}$	$\pm 30\text{ppm}$ , $\pm 20\text{ppm}$ , $\pm 10\text{ppm}$	at 25°C
Frequency Stability over Operating Temperature Range (refer to 25°C)	$F_{stab}$	$\pm 30\text{ ppm}$	-20°C ~ +70°C
		$\pm 20\text{ ppm}$	
		$\pm 10\text{ ppm}$	
		$\pm 10\text{ ppm}$	-30°C ~ +85°C
		$\pm 30\text{ ppm}$	-40°C ~ +85°C
		$\pm 20\text{ ppm}$	
		$\pm 60\text{ ppm}$	-40°C ~ +125°C
Operating Temperature Range	$T_{OTR}$	-20°C ~ +70°C	
		-40°C ~ +85°C	
		-40°C ~ +125°C	
Shunt Capacitance	$C_0$	3pF Max.	
Drive Level	$D_L$	1 ~ 200 $\mu$ W (50 $\mu$ W Typ.)	
Load Capacitance	$C_L$	6pF, 8pF, 10pF, 12pF	
Aging	$F_{aging}$	$\pm 3\text{ ppm Max.}$	at 25°C $\pm 3^\circ\text{C}$ , first year
Storage Temperature Range	$T_{STR}$	-55°C ~ +125°C	


### Motional Resistance (ESR)

Fundamental	
16 ~ 19.2 MHz	200 $\Omega$ Max.
19.2 ~ 30 MHz	100 $\Omega$ Max.
30 ~ 66 MHz	80 $\Omega$ Max.


## Dimensions

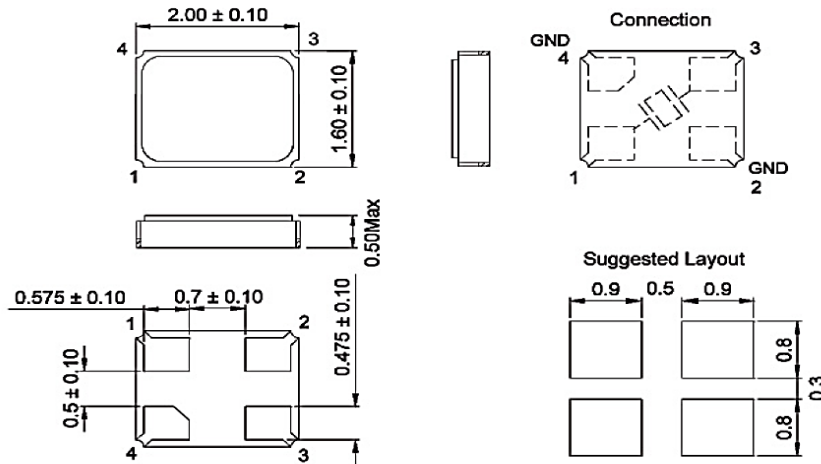

## Ordering Information

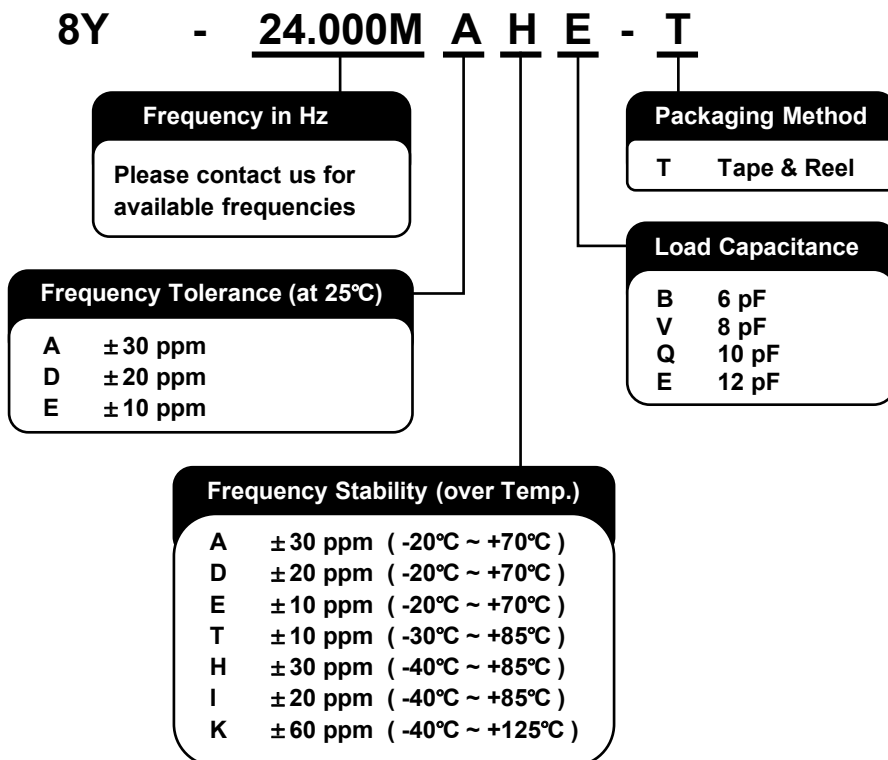


### Packing

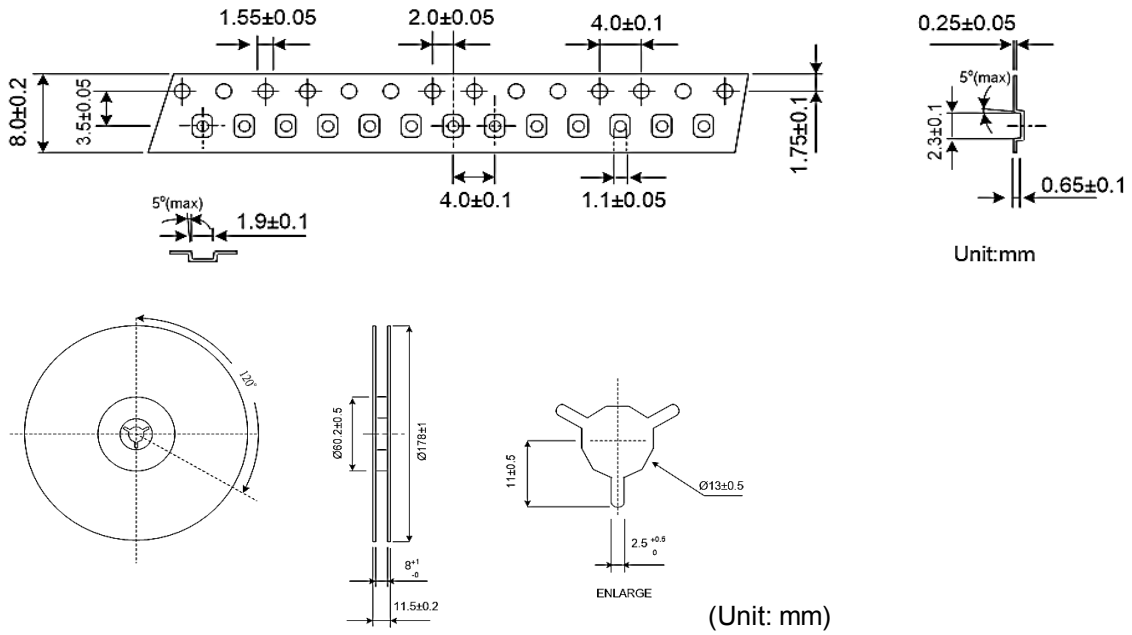

### Reflow Profile

Solder melting point : 220°C ± 10°C, 60 sec. Min.  
Peak temperature : 260°C ± 10°C, 10 sec. Min.

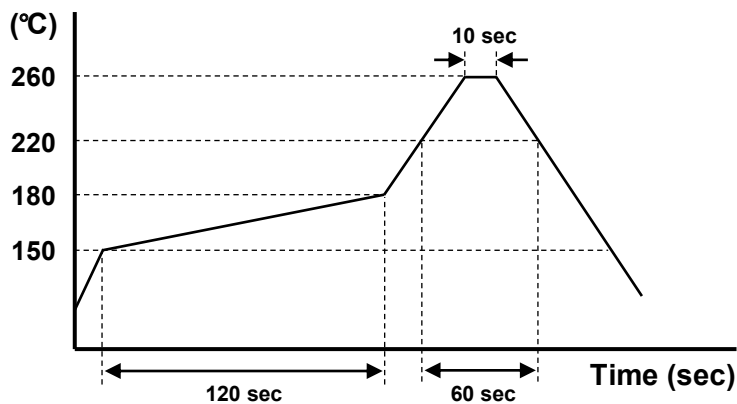

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Crystals](#) category:*

*Click to view products by [TXC Corporation](#) manufacturer:*

Other Similar products are found below :

[AB-11.0592MHZ](#) [ABC2-6.000MHZ-D4Z-T](#) [ABLS-20.000MHZ-D2-T](#) [ABS071-32.768KHZ-6-T](#) [LFXTAL066198Cutt](#) [ABL-27.000MHZ-B4Y-T](#) [ABM11-132-24.000MHZ-T3](#) [ABM3B1-25.000MHZ-D2Y-T](#) [SPT2A-.032768B](#) [SPT2A.032768G](#) [LFXTAL065253Cutt](#) [LFXTAL066431Cutt](#) [XT9SNLANA16M](#) [7A-24.576MBBK-T](#) [6504-202-1501](#) [6526-202-1501](#) [ABM3B-24.000MHZ-R60-D1W-](#) [ABLS-12.000MHZ-B2Y-T](#) [SG636PCE-20.000MC](#) [3404](#) [C1E-19.200-12-1530-X-R](#) [ABM11-16.000MHZ-9-B1U-T](#) [FL5000014](#) [EUCA18-3.1872M](#) [FX0800015](#) [425F35E027M0000](#) [FP0800018](#) [MS3V-T1R-32.768kHz-7pF-20PPM-TA-QC-Au](#) [VXM7-1C1-16M000](#) [MS3V-T1R-32.768kHz-9pF-20PPM-TA-QC-Au](#) [17000](#) [17301](#) [GB1200038](#) [4133-VBO-168.62MHZ](#) [4133-VBO-171.750MHZ](#) [NX8045GB-12M-STD-CSF-4](#) [NX8045GB-5MHZ-STD-CSF-3](#) [FC5BSHFEM25.0-T1](#) [FC5AQCCMF10.0-T1](#) [SRX6353\(T\)](#) [32.768K7PI/3215E](#) [FC-12M 32.7680KA-A0](#) [FC-12M 32.7680KD-A0](#) [HC49USM-FF3F18-25.000MHz](#) [WC26F-32.768KHz](#) [HC-49/U-S6144000BBKB](#) [FC3BSHHEF32.0-T3](#) [ABM3C-25.000MHZ-E4Y-T](#) [LFXTAL034477Bulk](#) [ABM8G-12.000MHZ-D4Y-T](#)