

A
B
C
D
E
F


12345678

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

SPECIFICATIONS

Electrical
Current Rating: 1A AC(rms)/DC
Voltage Rating: 250V AC(rms)/DC
Contact Resistance: 30 mΩ Max
Insulation Resistance: 500 MΩ Min
Withstanding Voltage: 500V AC r.m.s
Temperature Range—Operating: -55°C~+105°C
Material and Plating
Housing: PBT (UL 94V-0)
Contact: Phosphor Bronze Gold
Contact plating: Selective gold in contact area, tin on tail
Shell: Zinc Alloy

A
B
C
D
E
F

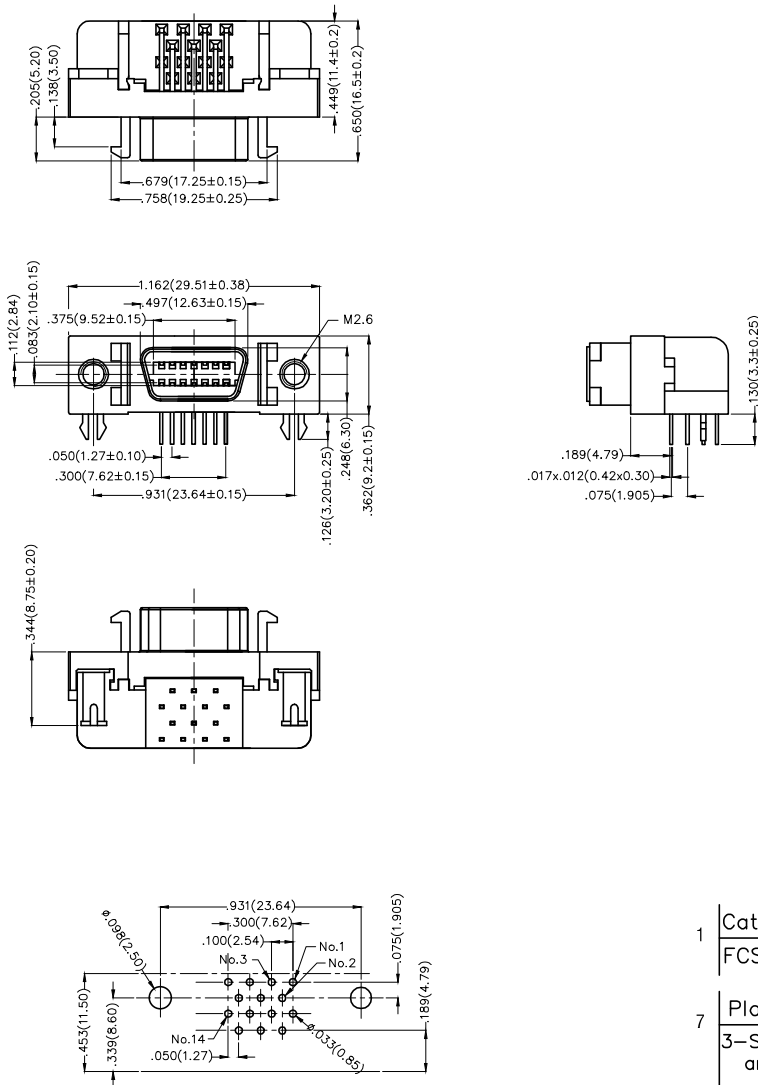

Ordering Information

FCS 14 01 — F0 D B 3 XX K6 K A
1 2 3 4 5 6 7 8 9 10 11

1	Category FCS—SCSI	2	Circuits 14	3	Distinction No. 01	4	Type F0—Female	5	Assembly Layout D—DIP	6	Entry Angle B—90° Angle
7	Plating 3—Selective gold in contact area, tin on tail	8	Thickness of Plating 00—Gold flash 03—3μ" Custom plate available	9	Color—Resin K6—Black	10	Packaging K—Tray	11	Distinction Type A—Type A		

Recommended P.C.Board Layout
General Tolerances: ±0.05mm

 THIRD ANGLE PROJECTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 19/JUL/13	PART NO. FCS1401-F0DB3XXK6KA	ITEM NO. FCS1401	 Leader Of Industry	
DESIGN UNITS Inch (metric)		X.±.012(0.30)	X.±5°	CHECKED BY CHERRY	DATE 19/JUL/13	TITLE SCSI Connector Pitch 1.27mm 90° Angle Female			
SCALE 5:1	SIZE A4	X.XX±.006(0.15)	.XX°±1°	DRAWN BY KEVIN	DATE 19/JUL/13	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
		X.XXX±.004(0.10)	.XXX°±0.5°			REV 0		SHEET NO. 1/1	

12345678

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD



SPECIFICATIONS

Electrical

Current Rating: 1A AC(rms)/DC
Voltage Rating: 250V AC(rms)/DC
Contact Resistance: 30 mΩ Max
Insulation Resistance: 500 MΩ Min
Withstanding Voltage: 500V AC r.m.s
Temperature Range—Operating: -55°C~+105°C

Material and Plating

Housing: PBT (UL 94V-0)
Contact: Phosphor Bronze Gold
Contact plating: Selective gold in contact area, tin on tail
Shell: Zinc Alloy

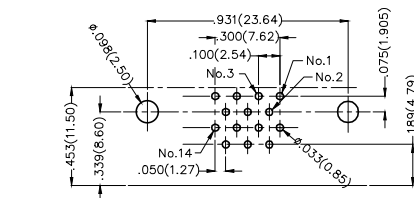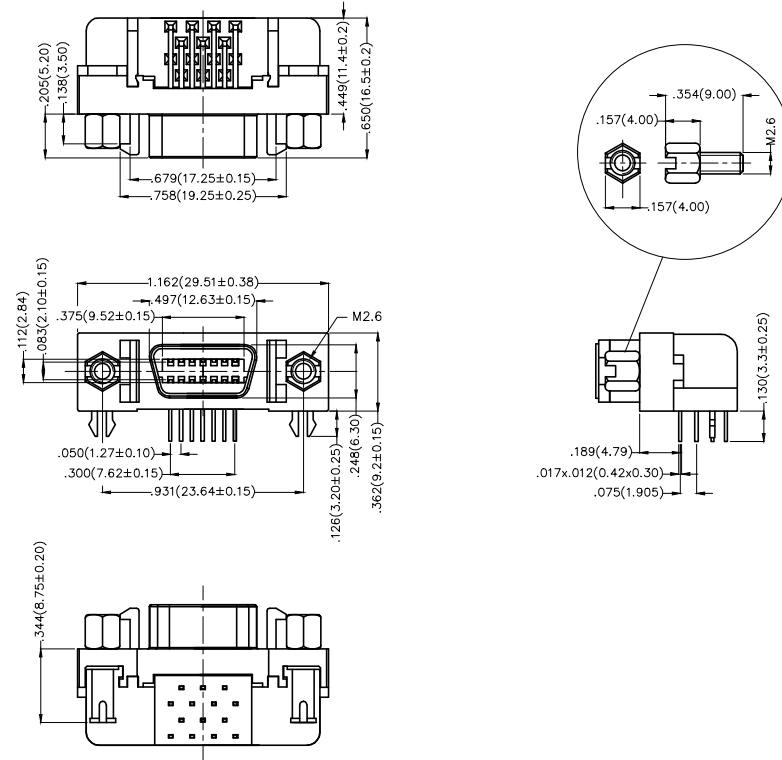

Recommended P.C.Board Layout
General Tolerances: ±0.05mm

Ordering Information

FCS 14 01 — F0 D B 3 XX K6 K B
1 2 3 4 5 6 7 8 9 10 11

1	Category FCS-SCSI	2	Circuits 14	3	Distinction No. 01	4	Type F0-Female	5	Assembly Layout D-DIP	6	Entry Angle B-90° Angle
7	Plating 3-Selective gold in contact area, tin on tail	8	Thickness of Plating 00-Gold flash 03-3μ" Custom plate available	9	Color-Resin K6-Black	10	Packaging K-Tray	11	Distinction Type B-Type B		

 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 19/JUL/13	PART NO. FCS1401-F0DB3XXK6KB	ITEM NO. FCS1401	 Leader Of Industry		
	X.±.012(0.30)	X.'±5"	CHECKED BY CHERRY	DATE 19/JUL/13	TITLE SCSI Connector Pitch 1.27mm 90° Angle Female				REV 0
	DESIGN UNITS Inch (metric)	X.X±.008(0.20)	.X'±2"	DRAWN BY	DATE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
	SCALE 5:1	X.XX±.006(0.15)	.XX'±1"	KEVIN	19/JUL/13				
SIZE A4	X.XXX±.004(0.10)	.XXX'±0.5"							

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD





SPECIFICATIONS

Electrical



Current Rating: 1A AC(rms)/DC
Voltage Rating: 250V AC(rms)/DC
Contact Resistance: 30 mΩ Max
Insulation Resistance: 500 MΩ Min
Withstanding Voltage: 500V AC r.m.s
Temperature Range—Operating: -55°C~+105°C

Material and Plating

Housing: PBT (UL 94V-0)
Contact: Phosphor Bronze Gold
Contact plating: Selective gold in contact area, tin on tail
Shell: Zinc Alloy

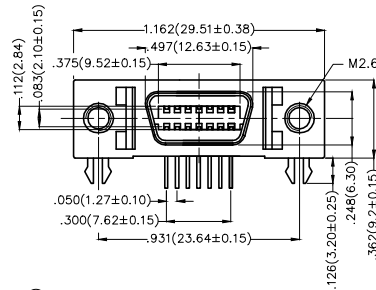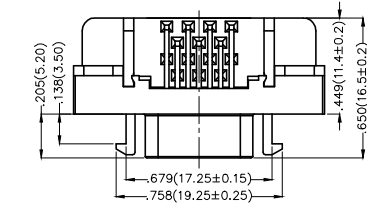

Screw (2pcs)

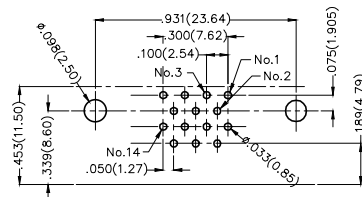

Recommended P.C.Board Layout
General Tolerances: ±0.05mm

Ordering Information

FCS 14 01 — F0 D B 3 XX K6 K C
1 2 3 4 5 6 7 8 9 10 11

1 Category FCS-SCSI	2 Circuits 14	3 Distinction No. 01	4 Type F0-Female	5 Assembly Layout D-DIP	6 Entry Angle B-90° Angle
7 Plating 3-Selective gold in contact area, tin on tail	8 Thickness of Plating 00-Gold flash 03-3μ" Custom plate available	9 Color-Resin K6-Black	10 Packaging K-Tray	11 Distinction Type C-Type C	

 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 19/JUL/13	PART NO. FCS1401-F0DB3XXK6KC	ITEM NO. FCS1401	 Leader Of Industry	
	X.±.012(0.30)	X'.±5"	CHECKED BY CHERRY	DATE 19/JUL/13	TITLE SCSI Connector Pitch 1.27mm 90° Angle Female			
	DESIGN UNITS Inch (metric)	X.XX±.008(0.20)	X'.±2"	DRAWN BY KEVIN	DATE 19/JUL/13	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
	SCALE 5:1	SIZE A4	X.XX±.006(0.15)	.XX'±1"	X.XXX±.004(0.10)	.XXX'±0.5"		

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [TXGA](#) manufacturer:

Other Similar products are found below :

[FBA25014-S02B2004K](#) [FBA75002-S02B2101L](#) [FBB04004-F24S1003K6M](#) [FBB04004-M40S1003K6M](#) [FBB04005-F20S1033K6M](#)
[FBB04005-F50S1033K6M](#) [FBB04005-M50S1033K6M](#) [FBB05001-F14S1003W5M](#) [FBB05001-F50S1003W5M](#) [FBB05001-M14S1013W5M](#)
[FBB05001-M50S1013W5M](#) [FBB05002-F10S1003K6MH40](#) [FBB05002-F30S1003K6MH22](#) [FBB05002-F30S1033K6MH22](#) [FBB05002-](#)
[F40S1003K6MH30](#) [FBB05002-M10S1003K6MH10](#) [FBB05002-M30S1003K6MH20](#) [FBB05002-M40S1003K6MH10](#) [FBB05002-](#)
[M40S1003K6MH20](#) [FBB05003-F14S1003K6MH30](#) [FBB05003-M14S1003K6MH10](#) [FBB05003-M24S1003K6MH10](#) [FBB05006-](#)
[F30B1005W5M](#) [FBB05006-M30S1005W5M](#) [FBB05008-F50S1013W5MH44](#) [FBB05008-M20S1013W5MH28](#) [FBB05008-](#)
[M50S1013W5MH28](#) [FBB05009-F220S3013K6M](#) [FBB05009-M120S3013K6M](#) [FBB08001-F20S1003K6MH40](#) [FBB08001-](#)
[F80S1003K6MH45](#) [FBB08001-M20S1003K6MH10](#) [FBB08001-M80S1003K6MH20](#) [FBB08002-F14B1005W5M](#) [FBB08002-](#)
[M14S1005W5M](#) [FBB08004-F120S3103K6M](#) [FBB08005-F150S3103K6M](#) [FBB08005-F40S3103K6M](#) [FBB08005-M150S3103K6M](#)
[FBB08006-F50S1013W5M](#) [FBB08006-M100S1013W5M](#) [FBB08006-M50S1013W5M](#) [FBB08006-M80S1013W5M](#) [FBB08007-](#)
[F40S3013W5M](#) [FBB08008-F40S3003K6M](#) [FBB08008-F50S3003K6M](#) [FBB08008-M40S3003K6M](#) [FBB08008-M50S3003K6M](#) [FBB08009-](#)
[F30S1015K6MH30](#) [FBB08009-M30S1015K6MH20](#)