


REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

Electrical
 Current Rating: 3.0A AC(rms)/DC
 Voltage Rating: 250V AC(rms)/DC
 Contact Resistance: 10 m Ω Max
 Insulation Resistance: 1000 M Ω MIN
 Withstanding Voltage: 800V AC r.m.s
 Temperature Range—Operating: -25°C~+85°C
 Material and Plating
 Housing: PA46(UL 94V-0)
 Contact Pin: Brass
 Plating: Tin Plated

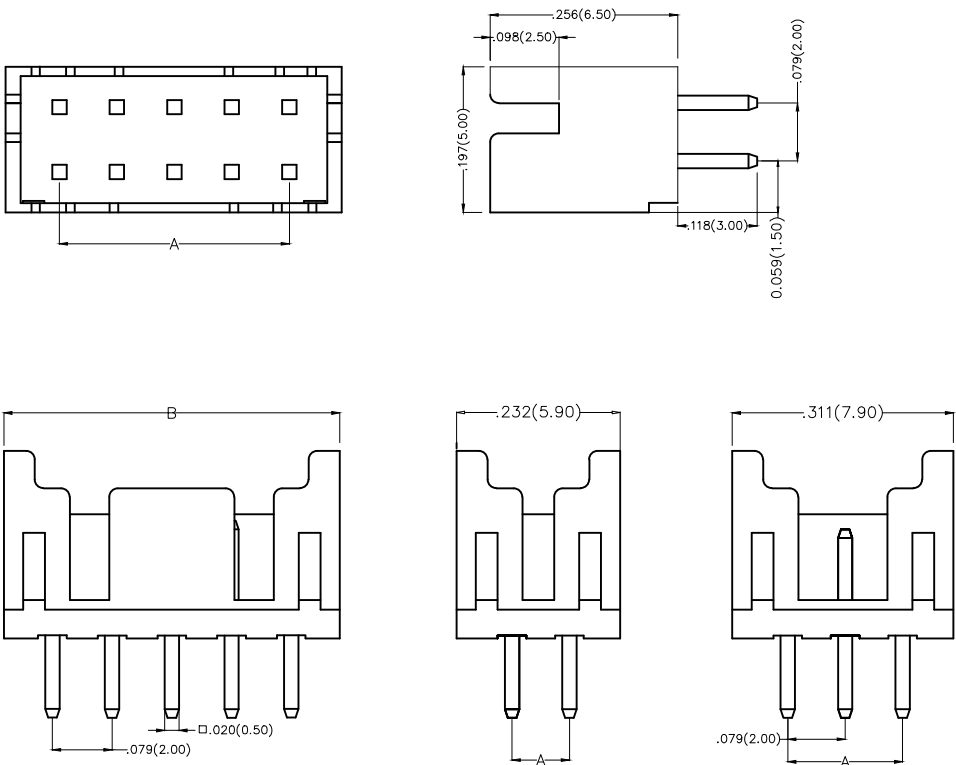

2x4-2x20Circuits


2x2Circuits

2x3Circuits

Ordering Information

FWF	200	05	—	D	XX	S	2	2	W5	B
1	2	3	4	5	6	7	8	9	10	

1	Category FWF—Wafer	2	Series Number 200—Pitch 2.0mm	3	Distinction No. 05	4	Row Option Double Row	5	Circuits XX	6	Entry Angle S-180° Vertical
7	Plating 2—Tin Plated	8	Material—Resin 2—PA46	9	Color—Resin W5—White	10	Packaging B—PE Bag				

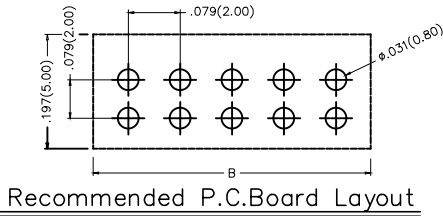

Recommended P.C.Board Layout

 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 18/JUN/13	PART NO. FWF20005-DXXS22W5B	ITEM NO. FWF20005	 Leader Of Industry		
	X.±.012(0.30)	X'±5°	CHECKED BY JACOB	DATE 18/JUN/13	TITLE Wire to Board (Wafer) Pitch 2.0mm 180° Vertical (DIP)				
	DESIGN UNITS Inch (metric)	X.X±.008(0.20)	.X'±2°	DRAWN BY CHERRY	DATE 18/JUN/13	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		REV 0	SHEET NO. 1/1
	SCALE 5:1	SIZE A4	X.XX±.006(0.15)	.XX'±1°					
		X.XXX±.004(0.10)	.XXX'±0.5°						

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

Circuits (n)	Part No.	Dimensions(in/mm)	
		A	B
4	FWF20005-D04S22W5B	.079(2.00)	.232(5.90)
6	FWF20005-D06S22W5B	.157(4.00)	.311(7.90)
8	FWF20005-D08S22W5B	.236(6.00)	.390(9.90)
10	FWF20005-D10S22W5B	.315(8.00)	.469(11.90)
12	FWF20005-D12S22W5B	.394(10.00)	.547(13.90)
14	FWF20005-D14S22W5B	.472(12.00)	.626(15.90)
16	FWF20005-D16S22W5B	.551(14.00)	.705(17.90)
18	FWF20005-D18S22W5B	.630(16.00)	.783(19.90)
20	FWF20005-D20S22W5B	.709(18.00)	.862(21.90)
22	FWF20005-D22S22W5B	.787(20.00)	.941(23.90)

Circuits (n)	Part No.	Dimensions(in/mm)	
		A	B
24	FWF20005-D24S22W5B	.866(22.00)	1.020(25.90)
26	FWF20005-D26S22W5B	.945(24.00)	1.098(27.90)
28	FWF20005-D28S22W5B	1.024(26.00)	1.177(29.90)
30	FWF20005-D30S22W5B	1.102(28.00)	1.256(31.90)
32	FWF20005-D32S22W5B	1.181(30.00)	1.335(33.90)
34	FWF20005-D34S22W5B	1.260(32.00)	1.413(35.90)
36	FWF20005-D36S22W5B	1.339(34.00)	1.492(37.90)
38	FWF20005-D38S22W5B	1.417(36.00)	1.571(39.90)
40	FWF20005-D40S22W5B	1.496(38.00)	1.650(41.90)

 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 18/JUN/13	PART NO. FWF20005-DXXS22W5B	ITEM NO. FWF20005	 Leader Of Industry		
	X.±0.12(0.30)	X'±5'	CHECKED BY	DATE	TITLE				
	DESIGN UNITS Inch (metric)	X.X±.008(0.20)	X'±2'	JACOB	18/JUN/13	Wire to Board (Wafer) Pitch 2.0mm 180° Vertical (DIP)		REV 0	SHEET NO. 1/1
	SCALE 5:1	SIZE A4	X.XX±.006(0.15)	X'±1'	DRAWN BY	DATE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
		X.XXX±.004(0.10)	X'X'±0.5'	CHERRY	18/JUN/13				

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [TXGA](#) manufacturer:

Other Similar products are found below :

[0015917161](#) [0022155065](#) [57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#)
[65781-047](#) [65817-010LF](#) [65817-015LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-](#)
[4853B](#) [71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [MHR-64-VUAL](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#)
[801-43-006-10-002000](#) [803-43-024-10-001000](#) [803-93-012-10-001000](#) [8-1437020-4](#) [819-22-004-30-001101](#) [820-22-006-30-001101](#)
[820-22-008-30-001101](#) [821-22-002-10-001101](#)