

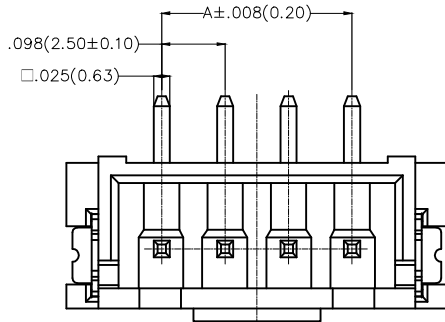
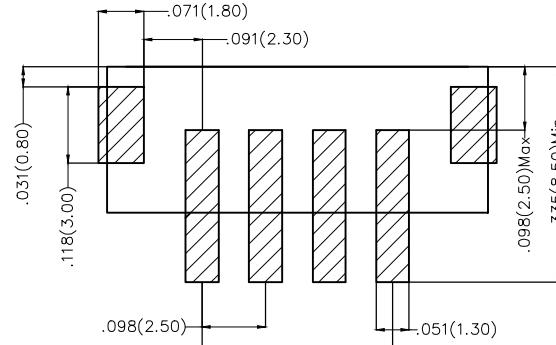
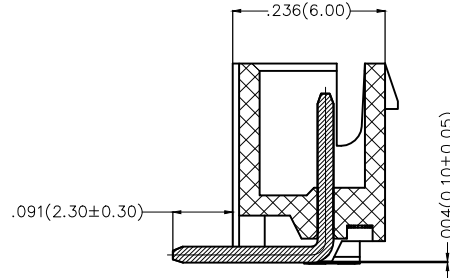
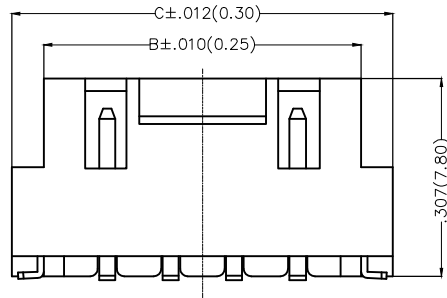
REV	LOCATIONS	DESCRIPTION	DATE	REVISOR	APPD

Electrical

Current Rating: 3A AC(rms)/DC
Voltage Rating: 250V AC(rms)/DC
Contact Resistance: 20 mΩ Max
Insulation Resistance: 1000 MΩ MIN
Withstanding Voltage: 1000V AC r.m.s
Temperature Range—Operating: -25°C~+85°C

Material and Plating

Housing: PA9T UL 94V-0
Contact Pin: Brass
Plating: Tin Plated
Solder Tab: Phosphor bronze



Recommended P.C.Board Layout

Ordering Information

FWF 250 29 — S XX S 2 5 W5 M
1 2 3 4 5 6 7 8 9 10

1	Category FWF—Wafer	2	Series Number 250—Pitch2.50mm	3	Distinction No. 29	4	Row Option S—Single Row	5	Circuits XX	6	Entry Angle S—180° Vertical
7	Plating 2—Tin Plated	8	Material—Resin 5—PA9T	9	Color—Resin W5—White	10	Packaging M—Reel				

 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 06/JUN/17	PART NO. FWF25029—SXXS25W5M	ITEM NO. FWF25029	 Leader Of Industry		
	X. ±0.30	X.* ±5°	CHECKED BY CHERRY	DATE 06/JUN/17	TITLE Wire to Board (Wafer) Pitch 2.5mm 180° Vertical (SMT)			REV 0	SHEET NO. 1/2
	DESIGN UNITS Metric	X.X ±0.20	X.X* ±2°	DRAWN BY LXF	DATE 06/JUN/17	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
SCALE 5:1	SIZE A4	X.XX ±0.15	X.XX* ±1°						
		X.XXX ±0.10	X.XXX* ±0.5°						

1

2

3

4

5

6

7

8

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

A

A

B

B

C

C

D

D



E

E

F

F

Circuits (n)	Part NO.	Dimension(in/mm)		
		A	B	C
2	FWF25029-S02S25W5M	.098(2.50)	.295(7.50)	.394(10.00)
3	FWF25029-S03S25W5M	.197(5.00)	.394(10.00)	.492(12.50)
4	FWF25029-S04S25W5M	.295(7.50)	.492(12.50)	.591(15.00)
5	FWF25029-S05S25W5M	.394(10.00)	.591(15.00)	.689(17.50)
6	FWF25029-S06S25W5M	.492(12.50)	.689(17.50)	.787(20.00)

 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY	DATE	PART NO.	ITEM NO.	 Leader Of Industry
	X. ±0.30	X.* ±5'	FRANK	06/JUN/17	FWF25029-SXXS25W5M	FWF25029	
DESIGN UNITS Metric	X.X ±0.20	X.X' ±2'	CHECKED BY	DATE	TITLE		REV 0
SCALE 5:1	X.XX ±0.15	X.XX' ±1'	CHERRY	06/JUN/17	Wire to Board (Wafer) Pitch 2.5mm 180° Vertical (SMT)		
SIZE A4	X.XXX ±0.10	X.XXX' ±0.5'	DRAWN BY	DATE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
			LXF	06/JUN/17			

1

2

3

4

5

6

7

8

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [TXGA](#) manufacturer:

Other Similar products are found below :

[0015917161](#) [0022155065](#) [57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#)
[65781-047](#) [65817-010LF](#) [65817-015LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-](#)
[4853B](#) [71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [MHR-64-VUAL](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#)
[801-43-006-10-002000](#) [803-43-024-10-001000](#) [803-93-012-10-001000](#) [8-1437020-4](#) [819-22-004-30-001101](#) [820-22-006-30-001101](#)
[820-22-008-30-001101](#) [821-22-002-10-001101](#)