

Alchip™-MZL Series

- Low ESR, 5,000hours at 105°C
- Rated voltage range : 6.3 to 50V, Nominal capacitance range : 100 to 1,500μF
- Solvent resistant type(see PRECAUTIONS AND GUIDELINES)
- Vibration resistance structure
- RoHS2 Compliant
- AEC-Q200 compliant : Please contact Chemi-Con for more details, test data, information.

MZL

↑ Longer life
MZA/MZR







◆ SPECIFICATIONS

Items	Characteristics																												
Category																													
Temperature Range	-55 to +105°C																												
Rated Voltage Range	6.3 to 50V _{dc}																												
Capacitance Tolerance	±20% (M) (at 20°C, 120Hz)																												
Leakage Current	I=0.01CV or 3μA, whichever is greater. Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V) (at 20°C after 2 minutes)																												
Dissipation Factor (tan δ)	<table border="1"> <tr> <td>Rated voltage (V_{dc})</td> <td>6.3V</td> <td>10V</td> <td>16V</td> <td>25V</td> <td>35V</td> <td>50V</td> </tr> <tr> <td>tan δ (Max.)</td> <td>0.26</td> <td>0.19</td> <td>0.16</td> <td>0.14</td> <td>0.12</td> <td>0.10</td> </tr> </table> (at 20°C, 120Hz)	Rated voltage (V _{dc})	6.3V	10V	16V	25V	35V	50V	tan δ (Max.)	0.26	0.19	0.16	0.14	0.12	0.10														
Rated voltage (V _{dc})	6.3V	10V	16V	25V	35V	50V																							
tan δ (Max.)	0.26	0.19	0.16	0.14	0.12	0.10																							
Low Temperature Characteristics (Max. Impedance Ratio)	<table border="1"> <tr> <td>Rated voltage (V_{dc})</td> <td>6.3V</td> <td>10V</td> <td>16V</td> <td>25V</td> <td>35V</td> <td>50V</td> </tr> <tr> <td>Z(-25°C)/Z(+20°C)</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <td>Z(-40°C)/Z(+20°C)</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> </tr> <tr> <td>Z(-55°C)/Z(+20°C)</td> <td>4</td> <td>4</td> <td>4</td> <td>3</td> <td>3</td> <td>3</td> </tr> </table> (at 120Hz)	Rated voltage (V _{dc})	6.3V	10V	16V	25V	35V	50V	Z(-25°C)/Z(+20°C)	2	2	2	2	2	2	Z(-40°C)/Z(+20°C)	3	3	3	3	3	3	Z(-55°C)/Z(+20°C)	4	4	4	3	3	3
Rated voltage (V _{dc})	6.3V	10V	16V	25V	35V	50V																							
Z(-25°C)/Z(+20°C)	2	2	2	2	2	2																							
Z(-40°C)/Z(+20°C)	3	3	3	3	3	3																							
Z(-55°C)/Z(+20°C)	4	4	4	3	3	3																							
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage is applied for 5,000 hours at 105°C. <table border="1"> <tr> <td>Capacitance change</td> <td>≤ ±35% of the initial value</td> </tr> <tr> <td>D.F. (tan δ)</td> <td>≤300% of the initial specified value</td> </tr> <tr> <td>Leakage current</td> <td>≤The initial specified value</td> </tr> </table>	Capacitance change	≤ ±35% of the initial value	D.F. (tan δ)	≤300% of the initial specified value	Leakage current	≤The initial specified value																						
Capacitance change	≤ ±35% of the initial value																												
D.F. (tan δ)	≤300% of the initial specified value																												
Leakage current	≤The initial specified value																												
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 105°C without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to Item 4.1 of JIS C 5101-4. <table border="1"> <tr> <td>Capacitance change</td> <td>≤ ±30% of the initial value</td> </tr> <tr> <td>D.F. (tan δ)</td> <td>≤200% of the initial specified value</td> </tr> <tr> <td>Leakage current</td> <td>≤The initial specified value</td> </tr> </table>	Capacitance change	≤ ±30% of the initial value	D.F. (tan δ)	≤200% of the initial specified value	Leakage current	≤The initial specified value																						
Capacitance change	≤ ±30% of the initial value																												
D.F. (tan δ)	≤200% of the initial specified value																												
Leakage current	≤The initial specified value																												
Surge Voltage Test	The capacitors shall be subjected to 1,000 cycles each consisting of charging with the specified surge voltage for 30±5 seconds through a protective resistor (as required for RC=0.1±0.05sec) and open-circuiting for 5.5 minutes at a room temperature of 15 to 35°C. <table border="1"> <tr> <td>Rated voltage (V_{dc})</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> </tr> <tr> <td>Surge voltage (V_{dc})</td> <td>7.2</td> <td>12</td> <td>18</td> <td>29</td> <td>40</td> <td>58</td> </tr> </table> <table border="1"> <tr> <td>Appearance</td> <td>No significant damage</td> </tr> <tr> <td>Capacitance change</td> <td>≤ ±20% of the initial value</td> </tr> <tr> <td>D.F. (tan δ)</td> <td>≤200% of the initial specified value</td> </tr> <tr> <td>Leakage current</td> <td>≤The initial specified value</td> </tr> </table> (Caution) Surge Voltage Test intends to evaluate capacitors in durability of an exceptional excessive voltage under specific conditions. It does not imply long-term use at all.	Rated voltage (V _{dc})	6.3	10	16	25	35	50	Surge voltage (V _{dc})	7.2	12	18	29	40	58	Appearance	No significant damage	Capacitance change	≤ ±20% of the initial value	D.F. (tan δ)	≤200% of the initial specified value	Leakage current	≤The initial specified value						
Rated voltage (V _{dc})	6.3	10	16	25	35	50																							
Surge voltage (V _{dc})	7.2	12	18	29	40	58																							
Appearance	No significant damage																												
Capacitance change	≤ ±20% of the initial value																												
D.F. (tan δ)	≤200% of the initial specified value																												
Leakage current	≤The initial specified value																												

◆ DIMENSIONS [mm]

● Terminal Code : A

● Terminal Code : G(Vibration resistant structure)



Size code	D	L	A	B	C	W	P
HA0	8	10.0	8.3	8.3	9.0	0.7 to 1.1	3.1
JA0	10	10.0	10.3	10.3	11.0	0.7 to 1.1	4.5

▨ : Dummy terminals

◆ MARKING

EX) 35V560μF




● Rated voltage symbol

Rated voltage (V _{dc})	6.3	10	16	25	35	50
Symbol	j	A	C	E	V	H

Applying voltage over the rated voltages causes the capacitors to have short lifetime. Besides, applying voltage over the specified surge voltages may cause to have short circuit failure. A protection circuit should be used if applied voltage will exceed the rated voltages.

Alchip™-MZL Series

◆PART NUMBERING SYSTEM

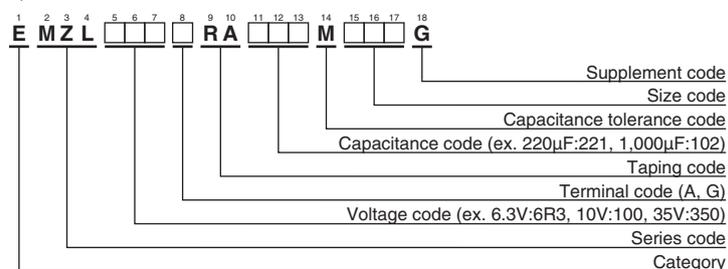

Please refer to "Product code guide (surface mount type)"

◆STANDARD RATINGS

WV (V _{dc})	Cap (μF)	Size code	tan δ	ESR (Ω max./20°C, 100kHz)	Rated ripple current (mA _{rms} /105°C, 100kHz)	Part No.
6.3	470	HA0	0.26	0.16	600	EMZL6R3 <input type="text"/> RA471MHA0G
	1,000	HA0	0.26	0.16	600	EMZL6R3 <input type="text"/> RA102MHA0G
	1,500	JA0	0.26	0.08	850	EMZL6R3 <input type="text"/> RA152MJA0G
10	330	HA0	0.19	0.16	600	EMZL100 <input type="text"/> RA331MHA0G
	470	HA0	0.19	0.16	600	EMZL100 <input type="text"/> RA471MHA0G
	680	HA0	0.19	0.16	600	EMZL100 <input type="text"/> RA681MHA0G
	1,000	JA0	0.19	0.08	850	EMZL100 <input type="text"/> RA102MJA0G
16	330	HA0	0.16	0.16	600	EMZL160 <input type="text"/> RA331MHA0G
	470	HA0	0.16	0.16	600	EMZL160 <input type="text"/> RA471MHA0G
	680	JA0	0.16	0.08	850	EMZL160 <input type="text"/> RA681MJA0G
25	220	HA0	0.14	0.16	600	EMZL250 <input type="text"/> RA221MHA0G
	330	HA0	0.14	0.16	600	EMZL250 <input type="text"/> RA331MHA0G
	470	HA0	0.14	0.08	850	EMZL250 <input type="text"/> RA471MHA0G
	470	JA0	0.14	0.08	850	EMZL250 <input type="text"/> RA471MJA0G
	820	JA0	0.14	0.06	1,190	EMZL250 <input type="text"/> RA821MJA0G
35	100	HA0	0.12	0.16	600	EMZL350 <input type="text"/> RA101MHA0G
	220	HA0	0.12	0.16	600	EMZL350 <input type="text"/> RA221MHA0G
	330	HA0	0.12	0.08	850	EMZL350 <input type="text"/> RA331MHA0G
	330	JA0	0.12	0.08	850	EMZL350 <input type="text"/> RA331MJA0G
	560	JA0	0.12	0.06	1,190	EMZL350 <input type="text"/> RA561MJA0G
50	100	HA0	0.10	0.34	350	EMZL500 <input type="text"/> RA101MHA0G
	220	JA0	0.10	0.18	670	EMZL500 <input type="text"/> RA221MJA0G

: Enter the appropriate terminal code.

◆RATED RIPPLE CURRENT MULTIPLIERS

●Frequency Multipliers

Capacitance(μF)	Frequency(Hz)			
	120	1k	10k	100k
100	0.40	0.75	0.90	1.00
220 to 560	0.50	0.85	0.94	1.00
680 to 1,500	0.60	0.87	0.95	1.00

The endurance of capacitors is reduced with internal heating produced by ripple current at the rate of halving the lifetime with every 5°C rise. When long life performance is required in actual use, the rms ripple current has to be reduced.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Aluminium Electrolytic Capacitors - SMD category](#):

Click to view products by [United Chemicon manufacturer](#):

Other Similar products are found below :

[EEV-FK1E332W](#) [22927](#) [MAL214099813E3](#) [HUB1800-S](#) [34610](#) [RYK-50V101MG5TT-FL](#) [107AXZ016MQ5](#) [EMF1EM101E83D00R](#)
[EMK1AM221E83D00R](#) [EMK1EM471GB0D00R](#) [EMK1VM101E83D00R](#) [EMVY350ARA221MHA0G](#) [UV2G3R3M0810VG](#)
[RVT2A4R7M0605](#) [MAL214097402E3](#) [MAL215375471E3](#) [MAL224699909E3](#) [MAL224699813E3](#) [MAL215099017E3](#) [MAL215099117E3](#)
[MAL215099818E3](#) [AEH1010471M010R](#) [AEA0810101M035R](#) [AEA1010681M016R](#) [AEA1010471M025R](#) [AEA0810331M010R](#)
[AEA1616102M050R](#) [HV100M100E077ETR](#) [RC0J226M04005VR](#) [RC0J476M05005VR](#) [RC1A227M08010VR](#) [RC1C476M6L005VR](#)
[MAL214099111E3](#) [50SEV1M4X5.5](#) [50SKV1M4X5.5](#) [TYEH1A336E55MTR](#) [UCD1V100MCQ1GS](#) [UCX1H471MNQ1MS](#)
[35SEV47M6.3X8](#) [35SLV10M5X6.1](#) [VES2R2M1HTR-0405](#) [VZH102M1ATR-1010](#) [50SEV10M6.3X5.5](#) [50SGV1M4X6.1](#)
[EDK226M035A9DAA](#) [EEV-HA1A471UP](#) [SC1C476M05005VR](#) [UCX1H471MNS1MS](#) [VZH331M1ETR-0810](#) [VES101M1CTR-0605](#)