

K-No.: 25440

100 A Current Sensor

For the electronic measurement of currents:
DC, AC, pulsed, mixed ..., with a galvanic
Isolation between the primary circuit
(high power) and the secondary circuit
(electronic circuit)

Date: 17.04.2013

Customer: Standard type

Customers Part no.:

Page 1 of 2

Description

- Closed loop (compensation)
- Current Sensor with magnetic field probe
- Printed circuit board mounting
- Casing and materials UL-listed

Characteristics

- Excellent accuracy
- Very low offset current
- Very low temperature dependency and offset current drift
- Very low hysteresis of offset current
- Short response time
- Wide frequency bandwidth
- Compact design
- Reduced offset ripple

Applications

- Mainly used for stationary operation in industrial applications:
- AC variabel speed drives and servo motor drives
 - Static converters for DC motor drives
 - Battery supplied applications
 - Switched Mode Power Supplies (SMPS)
 - Power Supplies for welding applications
 - Uninterruptable Power Suppllies (UPS)

Electrical data – Ratings

I_{PN}	Primary nominal r.m.s. current	100	A
R_M	Measuring resistance $V_C = \pm 12V$	0 ... 200	Ω
	$V_C = \pm 15V$	5 ... 400	Ω
I_{SN}	Secondary nominal r.m.s. current	50	mA
K_N	Turns ratio	1: 2000	

Accuracy – Dynamic performance data

		min.	typ.	max.	Unit
$I_{P,max}$	Max. measuring range @ $V_C = \pm 12V$, $R_M = 5 \Omega$ ($t_{max} = 10sec$) @ $V_C = \pm 15V$, $R_M = 5 \Omega$ ($t_{max} = 10sec$)	± 188			A
X	Accuracy @ I_{PN} , $T_A = 25^\circ C$	± 236			A
ϵ_L	Linearity	0.1	0.5	%	%
I_0	Offset current @ $I_P=0$, $T_A = 25^\circ C$	0.02	0.05	mA	
t_r	Response time	1			μs
$\Delta t (I_{P,max})$	Delay time at $dI/dt = 100 A/\mu s$	200			ns
f	Frequency bandwidth	DC...200			kHz

General data

		min.	typ.	max.	Unit
T_A	Ambient operating temperature	-40	+85		$^\circ C$
T_S	Ambient storage temperature	-40	+90		$^\circ C$
m	Mass		15		g
V_C	Supply voltage	± 11.4	± 12 or ± 15	± 15.75	V
I_c	Current consumption	18			mA
	Constructed and manufactured and tested in accordance with EN 61800-5-1 (primary vs. secondary) Reinforced insulation, Insulation material group 1, Pollution degree 2				
S_{clear}	Clearance (component without solder pad)	12			mm
S_{creep}	Creepage (component without solder pad)	12			mm
V_{sys}	System voltage overvoltage category 3	RMS		600	V
V_{work}	Working voltage (table 7 acc. to EN61800-5-1) over voltage category 2	RMS		1000	V
U_{PD}	Rated discharge voltage	peak value		1225	V
	Max. potential difference acc. to UL 508	RMS		600	V AC

Maximale Dauer- und Spitzenströme bei bestimmten Temperaturen

Supply voltage $\pm 12 V$:

T_A	85 °C	85 °C	70 °C	55 °C
I_P	100 A	125 A	150 A	150 A
$I_{P,max}$	188 A	183 A	185 A	194 A
R_M	5 Ω	5 Ω	5 Ω	5 Ω

Supply voltage $\pm 15V$:

T_A	85 °C	85 °C	70 °C	55 °C
I_P	100 A	125 A	150 A	150 A
$I_{P,max}$	236 A	204 A	232 A	244 A
R_M	5 Ω	20 Ω	5 Ω	5 Ω

Date Name Issue Amendment

17.04.13 KRe. 81 Mechnical outline: marking with UL-sign and max. potential difference acc. to UL 508 added. CN-651

05.02.13 Le 81 Mechanical outline changed (the reference line at the standoff is just a bit down-eccentric). Lapidary change.

Hrsg.: KB-E Bearb: Le designer KB-PM IA: KRe. check freig.: HS released

K-No.: 25440

100 A Current Sensor

For the electronic measurement of currents:
 DC, AC, pulsed, mixed ..., with a galvanic
 Isolation between the primary circuit
 (high power) and the secondary circuit
 (electronic circuit)

Date: 17.04.2013

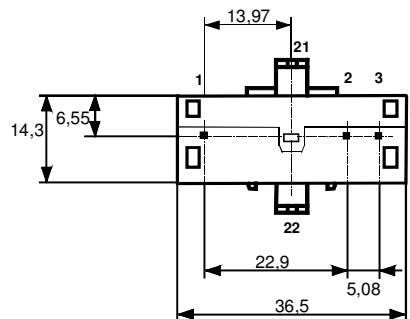
Customer: Standard type

Customers Part no.:

Page 2 of 2

Mechanical outline (mm):

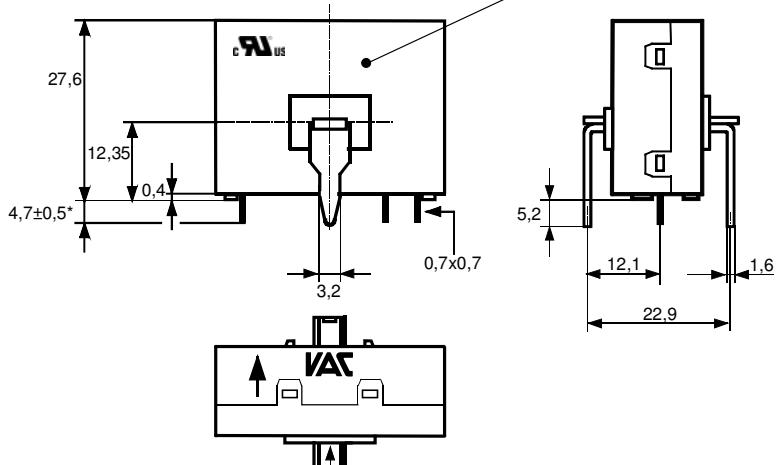
General tolerances DIN ISO 2768-c

Tolerances grid distance $\pm 0.2\text{mm}$

*= preliminary

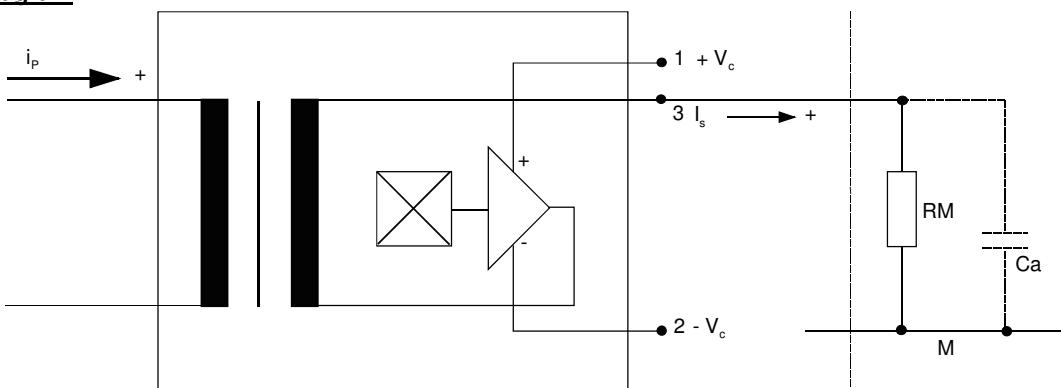
DC = Date Code
F = Factory

Connections:

1...3: $0.7 \times 0.7\text{ mm}$ 

Marking

Marking:

UL-sign
4646X111
F DC
Explanation:
 DC = Date Code [Format YWW]
Schematic diagram

Temperature of the primary conductor should not exceed 100°C

Additional indications are obtainable on request.

This specification is no declaration of warranty acc. BGB §443 dar.

Hrsg.: KB-E
editorBearb: Le
designerKB-PM IA: KRe.
checkfreig.: HS
released



Additional Information

Item No.: T60404-N4646-X111

K-No.: 25440

100 A Current Sensor

For electronic current measurement:
DC, AC, pulsed, mixed ..., with a galvanic
isolation between primary circuit
(high power) and secondary circuit

Date: 17.04.2013

Customer:

Customers Part No.:

Page 1 of 3

Electrical Data (investigate by a type checking)

		min.	typ.	max.	Unit
V _{Ctot}	Maximum supply voltage (without function) ±15.75 to ±18 V: for 1s per hour			±18	V
R _S	Secondary coil resistance @ T _A =85°C			114	Ω
R _P	Primary resistance @ T _A =25°C	0,1			mΩ
X _{Ti}	Temperature drift of X @ T _A = -40 ... +85 °C			0.1	%
I _{0ges}	Offset current (including I ₀ , I _{0t} , I _{0T})			0.07	mA
I _{0t}	Long term drift Offset current I ₀	0.025			mA
I _{0T}	Offset current temperature drift I ₀ @ T _A = -40 ...+85°C	0.025			mA
I _{0H}	Hysteresis current @ I _P =0 (caused by primary current 10 x I _{PN})	0.025	0.05		mA
ΔI ₀ /ΔV _C	Supply voltage rejection ratio		0.01		mA/V
i _{loss}	Offset ripple (with 1 MHz- filter first order)		0.17		mA
i _{loss}	Offset ripple (with 100 kHz- filter first order)	0.025	0.05		mA
i _{loss}	Offset ripple (with 20 kHz- filter first order)	0.008	0.013		mA
C _k	Maximum possible coupling capacity (primary – secondary)			6	pF

Inspection (Measurement after temperature balance of the samples at room temperature)

K _N (N ₁ /N ₂)	(V)	M3011/6	Transformation ratio (I _P =100A, 40-80 Hz)	1 : 2000 ± 0,5	%
I ₀	(V)	M3226	Offset current	< 0.05	mA
V _d	(V)	M3014:	Test voltage, rms, 1 s pin 1 – 3 vs. hole	1.8	kV
V _e	(AQL 1/S4)		Partial discharge voltage acc.M3024 (RMS) with V _{vor} (RMS)	1300 1625	V V

Type Testing (Pin 1 - 3 to hole)

V _w	HV transient test according to M3064 (1,2 µs / 50 µs-wave form)	8	kV	
V _d	Testing voltage to M3014	(5 s)	3,6	kV
V _e	Partial discharge voltage acc.M3024 (RMS) with V _{vor} (RMS)	1300 1625	V V	

Datum	Name	Index	Amendment
17.04.13	Le	81	Applicable documents: Further standards added. CN-651
05.02.13	Le	81	Date updated.
Hrsg.: KB-E editor	Bearb: Le designer	KB-PM IA: KRe check	freig.: HS released

Weitergabe sowie Vervielfältigung dieser Unterlage, Verwertung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdrücklich zugestanden. Zu widerhandlungen verpflichten zu Schadenersatz. Alle Rechte für den Fall der Patenterteilung oder GM-Eintragung vorbehalten

Copying of this document, disclosing it to third parties or using the contents there for any purposes without express written authorization by use illegally forbidden.
Any offenders are liable to pay all relevant damages.

K-No.: 25440

100 A Current Sensor

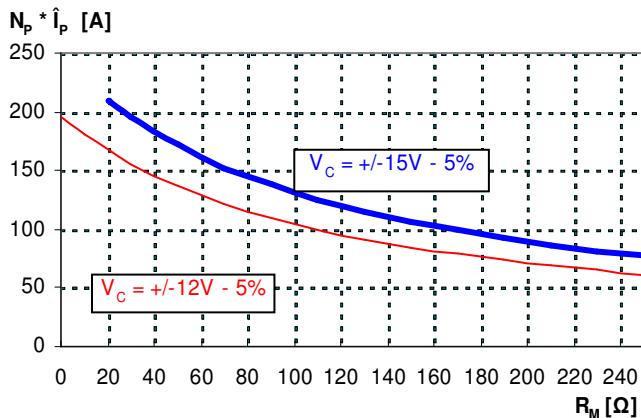
For electronic current measurement:
 DC, AC, pulsed, mixed ..., with a galvanic
 isolation between primary circuit
 (high power) and secondary circuit

Date: 17.04.2013

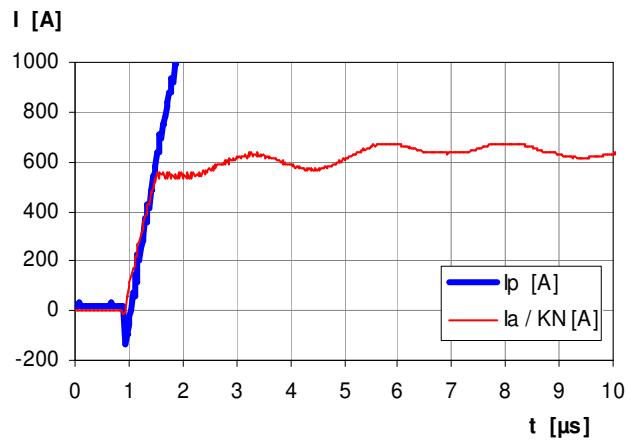
Customer:

Customers Part No.:

Page 2 of 3

Limit curve of measurable current $\hat{I}_P(R_M)$ @ ambient temperature $\leq 85^\circ\text{C}$ **Maximum measuring range (μs -range)**

Output current behaviour of a 3kA current pulse
 @ $V_C = \pm 15\text{V}$ und $R_M = 100\Omega$



Fast increasing currents (higher than the specified $I_{p,\max}$), e.g. in case of a short circuit, can be transmitted because the currents are transformed directly and be limited by diodes only.

The offset ripple can be reduced by an external low pass. Simplest solution is a passive low pass filter of 1st order with

$$f_g = \frac{1}{2\pi \cdot R_M \cdot C_a}$$

In this case the response time is enlarged.

It is calculated from:

$$t'_r \leq t_r + 2,5 R_M C_a$$

Applicable documents

Current direction: A positive output current appears at point I_s , by primary current in direction of the arrow.
 Further standards UL 508 ; file E317483, category NMTR2 / NMTR8

Hrsg.: KB-E
editorBearb: Le
designerKB-PM IA: KRe
checkfreig.: HS
released



Additional Information

Item No.: T60404-N4646-X111

K-No.: 25440	100 A Current Sensor For electronic current measurement: DC, AC, pulsed, mixed ..., with a galvanic isolation between primary circuit (high power) and secondary circuit	Date: 17.04.2013
--------------	---	------------------

Customer:	Customers Part No.:	Page 3 of 3
-----------	---------------------	-------------

Explanation of several of the terms used in the tablets (in alphabetical order)

I_{OH} :	Zero variation after overloading with a DC of tenfold the rated value ($R_M = R_{MN}$)
I_{ot} :	Long term drift of I_o after 100 temperature cycles in the range -40 bis 85 °C.
t_r :	Response time, measured as delay time at $I_P = 0,8 \cdot I_{Pmax}$ between a rectangular current and the output current.
$\Delta t (I_{Pmax})$:	Delay time between I_{Pmax} and the output current i_a with a primary current rise of $di_1/dt = 100 \text{ A}/\mu\text{s}$.
U_{PD}	Rated discharge voltage (recurring peak voltage separated by the insulation) proved with a sinusoidal voltage V_e $U_{PD} = \sqrt{2} * V_e / 1,5$
V_{vor}	Defined voltage is the RMS value of a sinusoidal voltage with peak value of $1,875 * U_{PD}$ required for partial discharge test in IEC 61800-5-1 $V_{vor} = 1,875 * U_{PD} / \sqrt{2}$
V_{sys}	System voltage RMS value of rated voltage according to IEC 61800-5-1
V_{work}	Working voltage voltage according to IEC 61800-5-1 which occurs by design in a circuit or across insulation
$X_{ges}(I_{PN})$:	The sum of all possible errors over the temperature range by measuring a current I_{PN} : $X_{ges} = 100 \cdot \left \frac{I_S(I_{PN})}{K_N \cdot I_{SN}} - 1 \right $
X :	Permissible measurement error in the final inspection at RT, defined by $X = 100 \cdot \left \frac{I_{SB}}{I_{SN}} - 1 \right $ where I_{SB} is the output DC value of an input DC current of the same magnitude as the (positive) rated current ($I_o = 0$)
X_{Ti} :	Temperature drift of the rated value orientated output term. I_{SN} (cf. Notes on F_i) in a specified temperature range, obtained by: $X_{Ti} = 100 \cdot \left \frac{I_{SB}(T_{A2}) - I_{SB}(T_{A1})}{I_{SN}} \right $
ε_L :	Linearity fault defined by $\varepsilon_L = 100 \cdot \left \frac{I_P}{I_{PN}} - \frac{I_{Sx}}{I_{SN}} \right $ Where I_P is any input DC and I_{Sx} the corresponding output term. I_{SN} : see notes of F_i ($I_o = 0$).

This "Additional information" is no declaration of warranty according BGB §443.

Hrsg.: KB-E	Bearb: Le	KB-PM IA: KRe	freig.: HS
editor	designer	check	released

Weitergabe sowie Vervielfältigung dieser Unterlage, Verwertung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdrücklich zugestanden. Zu widerhandlungen verpflichten zu Schadenersatz. Alle Rechte für den Fall der Patenterteilung oder GM-Eintragung vorbehalten

Copying of this document, disclosing it to third parties or using the contents there for any purposes without express written authorization by use illegally forbidden.
Any offenders are liable to pay all relevant damages.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Board Mount Current Sensors category:

Click to view products by Vacuumschmelze manufacturer:

Other Similar products are found below :

[CSDD1FR](#) [CSLA2ELI](#) [CSNP661-007](#) [SCL15 10006](#) [L18P003S05](#) [T60404-B4658-X030](#) [LA02P021S03](#) [LA01M041S05](#) [CSNE151-003](#)
[L08P150D15IPV](#) [SIC830AED-T1-GE3](#) [F03P006S05L](#) [T60404-N4646-X975](#) [CT-05](#) [CT-07-50](#) [L12P025D15](#) [L18P020S05](#) [MR-1](#) [MR-1-P5](#)
[T60404-N4646-X661](#) [T60404-N4646-X662](#) [DRV421RTJT](#) [ACS722LLCTR-10AB-T](#) [ACS724LLCTR-30AB-T](#) [ACS770LCB-050B-PFF-T](#)
[S23P50/100D15M1](#) [CSNR161005](#) [CSNJ481-001](#) [L37S200D15M](#) [MR-3](#) [C/CT-1216](#) [T60404-N4644-X101](#) [T60404-N4646-X401](#)
[F03P006S05](#) [CT-06-100](#) [CT-06-50](#) [SDV-FH5 DC125V](#) [T60404-N4646-X412](#) [ACS709LLFTR-35BB-T](#) [ACS710KLATR-12CB-T](#)
[ACS724KMATR-65AB-T](#) [ACS758LCB-100B-PFF-T](#) [ACS713ELCTR-20A-T](#) [ACS724LLCTR-05AB-T](#) [hat800-s](#) [HAT400-S](#) [Y-FCT-510](#)
[NRC-100](#) [NRC-200](#) [SRC-100](#)