






#### **Cat 7 Patch Ethernet Extension Cable**





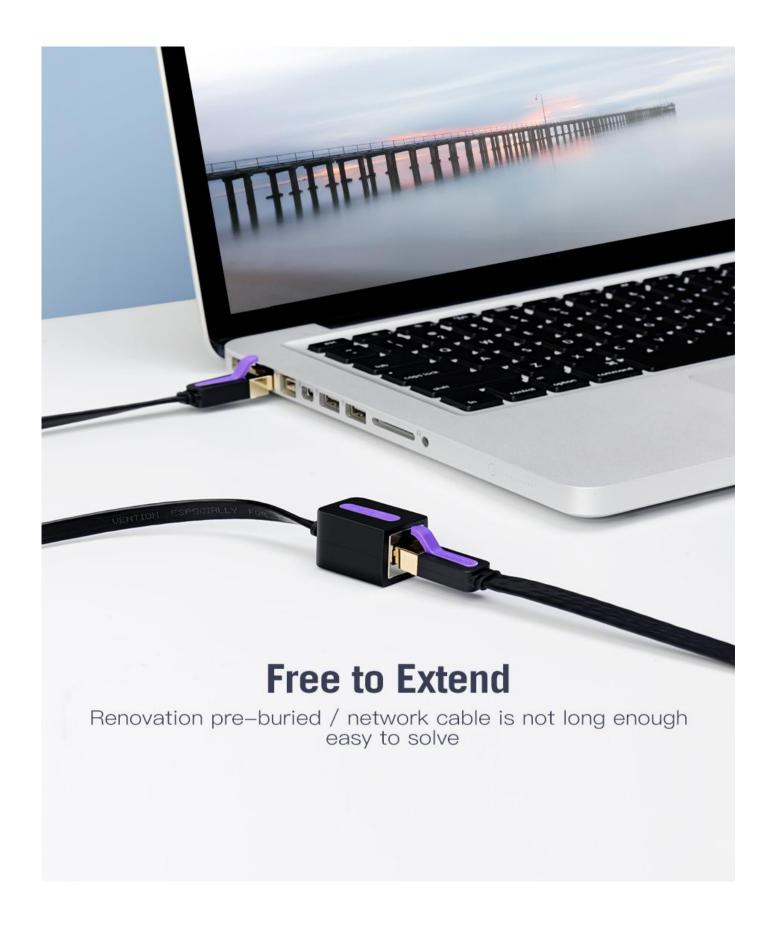

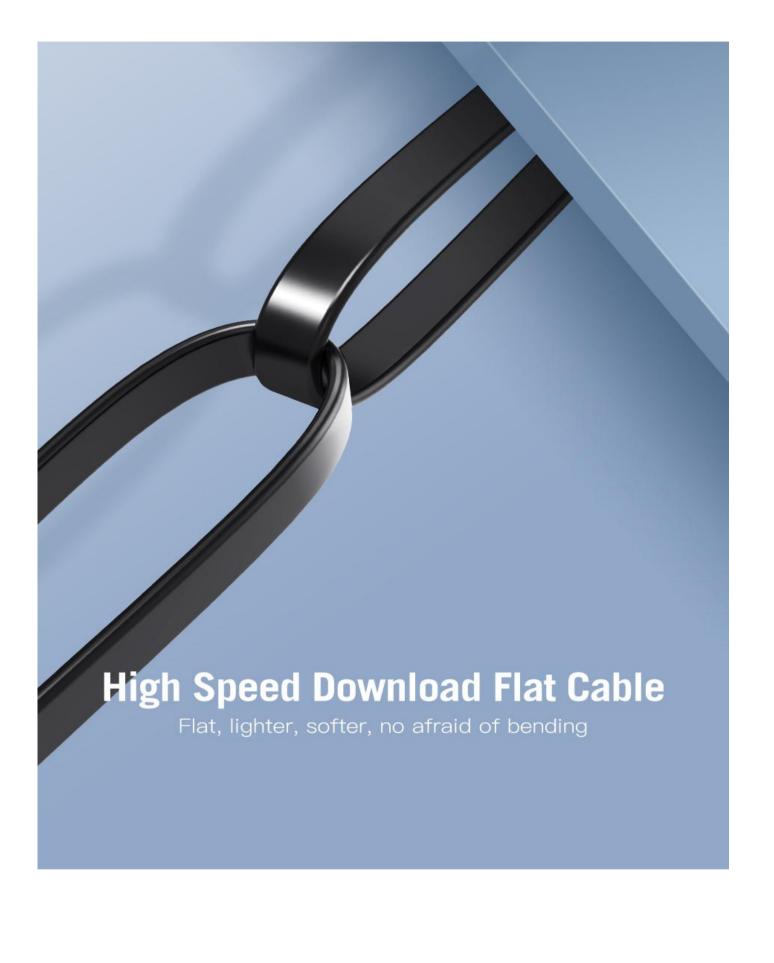

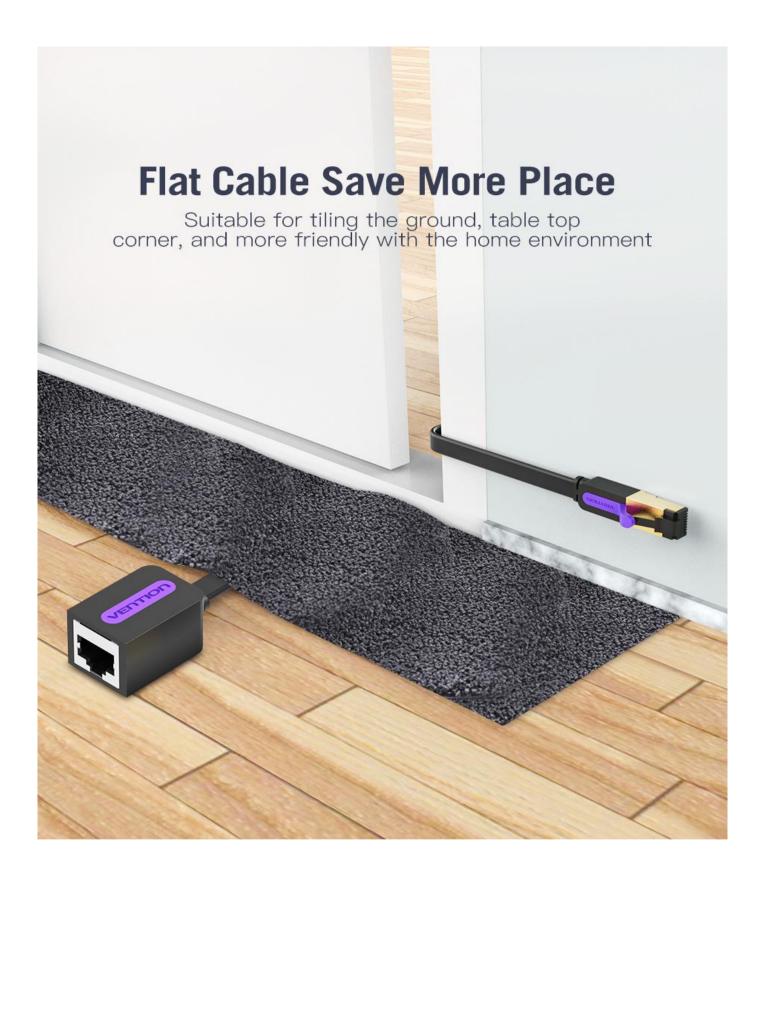





## **8P8C Pure Copper Contact**

Ensure seamless integration between core contacts for good transmission stability




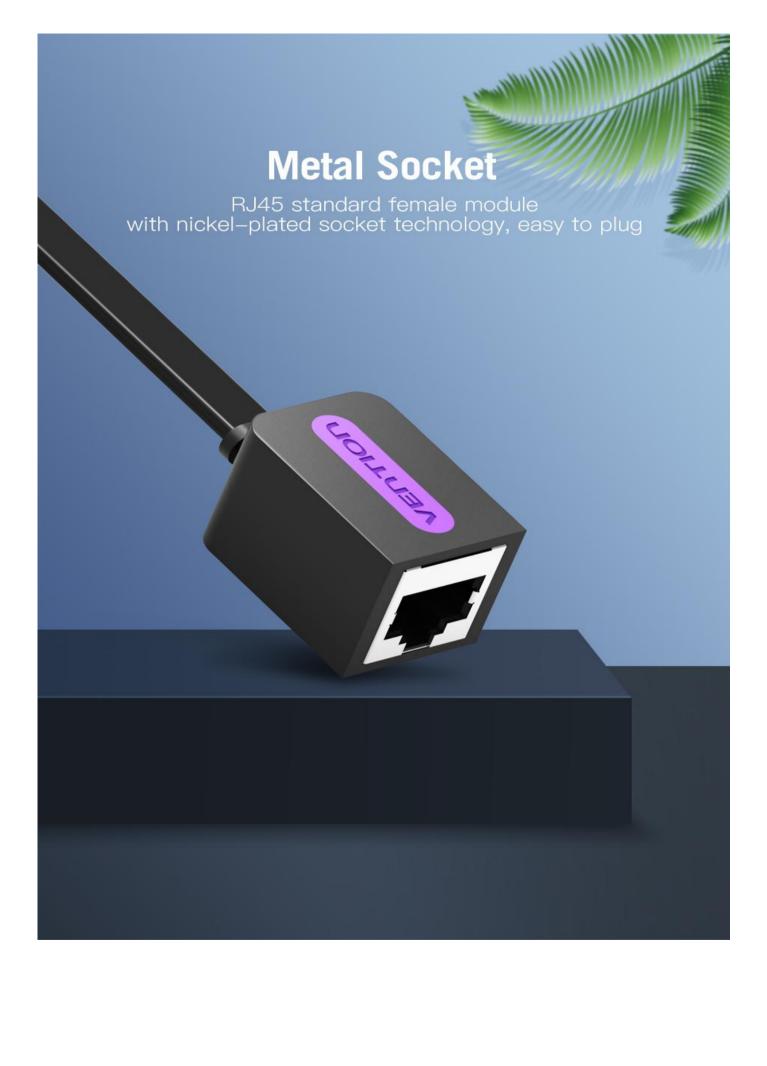

# Pure Copper Core + Aluminum-foil-shielded

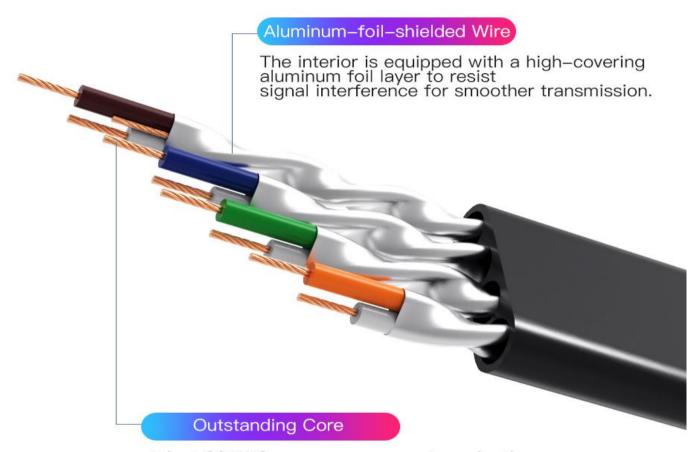


Adopt 30AWG pure copper core to make the network cable meet the 10G network speed performance use the faster network speed, and enjoy the game online.

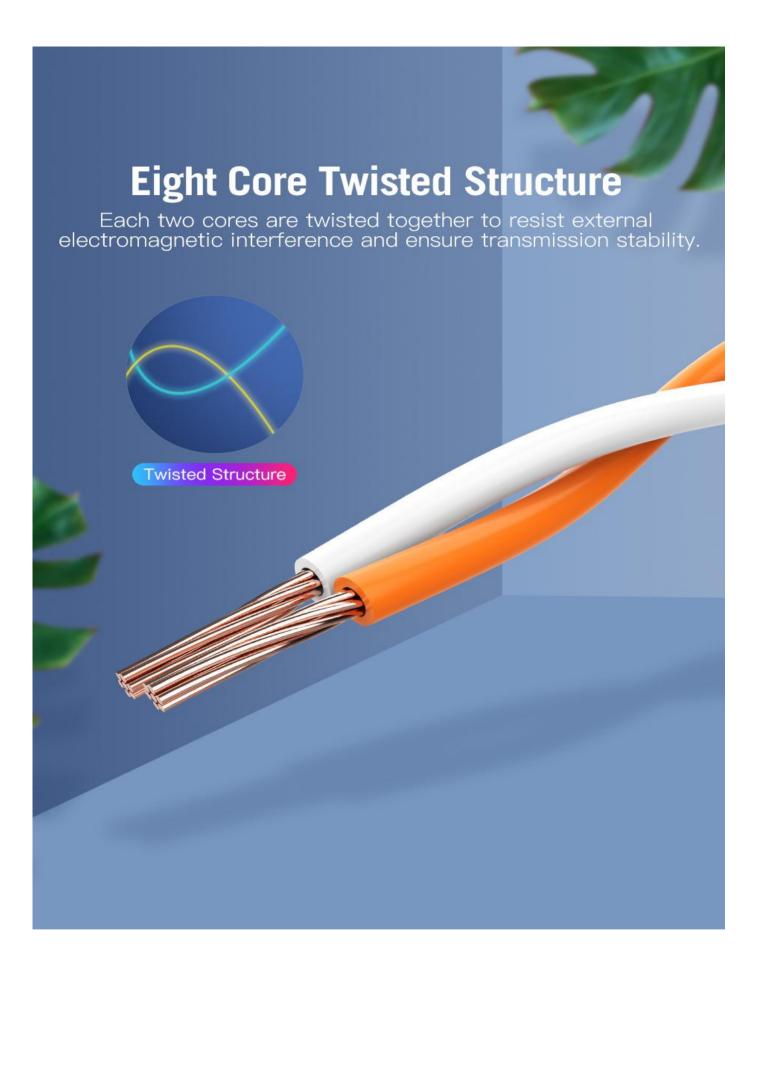

# **Widely Application**

Compatible with all RJ45 devices

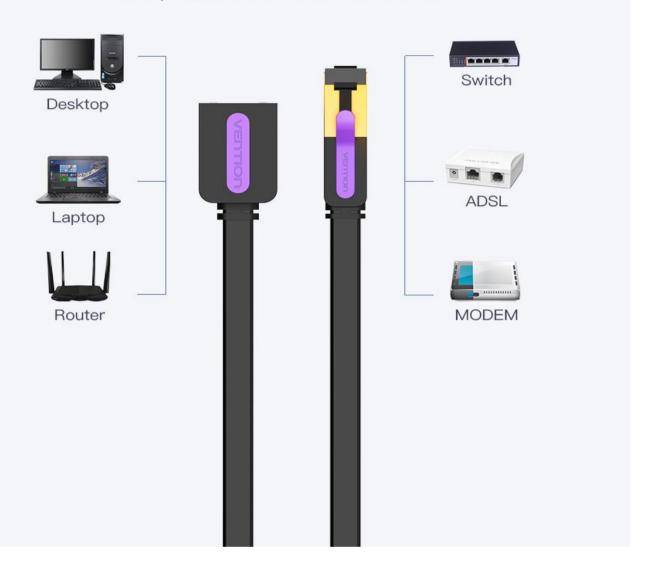

## **Product Parameters**

Brand:       Vention         Name:       Cat 7 Network Extension Cable(flat lines)         Model:       ICBB         Color:       Black         Connector Type:       RJ45 Male to Female         Wire Version:       CAT7 Types         Bandwidth:       1MHz ~ 600MHz         Transmission Rate:       10Gbps         Conductor:       Pure Copper         Crystal Head:       POM         Crystal Head Shielding:       Metal         Shielding:       Aluminum Foil         Jacket Material:       PVC         AWG:       30AWG         Wire Diameter:       2.5mm*8.2mm         Length:       0.5-10m         Loop Resistance (20°C):       140 Ω / KM         Capacity:       42PF/M         Characteristic Impedance (ZO):       100+5Ω         Delay Deviation:       4NS/100M         Warranty:       1 Year         Packing:       Color Box		
Model:ICBBColor:BlackConnector Type:RJ45 Male to FemaleWire Version:CAT7 TypesBandwidth: $1 MHz \sim 600 MHz$ Transmission Rate: $10 Gbps$ Conductor:Pure CopperCrystal Head:POMCrystal Head Shielding:MetalShielding:Aluminum FoilJacket Material:PVCAWG: $30 AWG$ Wire Diameter: $2.5 mm*8.2 mm$ Length: $0.5-10m$ Loop Resistance ( $20$ °C): $140 \Omega / KM$ Capacity: $42 PF/M$ Characteristic Impedance (ZO): $100+5\Omega$ Delay Deviation: $4NS/100M$ Warranty: $1 Year$	Brand:	Vention
Color:  Connector Type:  RJ45 Male to Female  Wire Version:  CAT7 Types  Bandwidth:  1MHz ~ 600MHz  Transmission Rate:  10Gbps  Conductor:  Pure Copper  Crystal Head :  POM  Crystal Head Shielding:  Metal  Shielding:  Jacket Material:  PVC  AWG:  30AWG  Wire Diameter:  Length:  0.5–10m  Loop Resistance (20°C):  140 Ω / KM  Capacity:  Characteristic Impedance (ZO):  Delay Deviation:  4NS/100M  Warranty:  1 Year	Name:	Cat 7 Network Extension Cable(flat lines)
Connector Type:RJ45 Male to FemaleWire Version:CAT7 TypesBandwidth:1MHz ~ 600MHzTransmission Rate:10GbpsConductor:Pure CopperCrystal Head :POMCrystal Head Shielding:MetalShielding:Aluminum FoilJacket Material:PVCAWG:30AWGWire Diameter:2.5mm*8.2mmLength:0.5–10mLoop Resistance (20°C):140 Ω / KMCapacity:42PF/MCharacteristic Impedance (ZO):100+5ΩDelay Deviation:4NS/100MWarranty:1 Year	Model:	ICBB
Wire Version:CAT7 TypesBandwidth: $1 \text{MHz} \sim 600 \text{MHz}$ Transmission Rate: $10 \text{Gbps}$ Conductor:Pure CopperCrystal Head :POMCrystal Head Shielding:MetalShielding:Aluminum FoilJacket Material:PVCAWG: $30 \text{AWG}$ Wire Diameter: $2.5 \text{mm} * 8.2 \text{mm}$ Length: $0.5 - 10 \text{m}$ Loop Resistance ( $20^{\circ}\text{C}$ ): $140 \Omega / \text{KM}$ Capacity: $42 \text{PF/M}$ Characteristic Impedance (ZO): $100 + 5\Omega$ Delay Deviation: $4 \text{NS}/100 \text{M}$ Warranty: $1 \text{ Year}$	Color:	Black
Bandwidth: $1 \text{MHz} \sim 600 \text{MHz}$ Transmission Rate: $10 \text{Gbps}$ Conductor:Pure CopperCrystal Head :POMCrystal Head Shielding:MetalShielding:Aluminum FoilJacket Material:PVCAWG: $30 \text{AWG}$ Wire Diameter: $2.5 \text{mm} * 8.2 \text{mm}$ Length: $0.5 - 10 \text{m}$ Loop Resistance ( $20^{\circ}\text{C}$ ): $140 \Omega / \text{KM}$ Capacity: $42 \text{PF/M}$ Characteristic Impedance (ZO): $100 + 5\Omega$ Delay Deviation: $4 \text{NS} / 100 \text{M}$ Warranty: $1 \text{ Year}$	Connector Type:	RJ45 Male to Female
Transmission Rate:10GbpsConductor:Pure CopperCrystal Head :POMCrystal Head Shielding:MetalShielding:Aluminum FoilJacket Material:PVCAWG:30AWGWire Diameter:2.5mm*8.2mmLength:0.5–10mLoop Resistance (20°C):140 $\Omega$ / KMCapacity:42PF/MCharacteristic Impedance (ZO):100+5 $\Omega$ Delay Deviation:4NS/100MWarranty:1 Year	Wire Version:	CAT7 Types
Conductor:Pure CopperCrystal Head :POMCrystal Head Shielding:MetalShielding:Aluminum FoilJacket Material:PVCAWG: $30AWG$ Wire Diameter: $2.5mm*8.2mm$ Length: $0.5-10m$ Loop Resistance ( $20^{\circ}$ C): $140 \Omega / KM$ Capacity: $42PF/M$ Characteristic Impedance (ZO): $100+5\Omega$ Delay Deviation: $4NS/100M$ Warranty: $1 Year$	Bandwidth:	1MHz ~ 600MHz
Crystal Head :POMCrystal Head Shielding:MetalShielding:Aluminum FoilJacket Material:PVCAWG: $30AWG$ Wire Diameter: $2.5mm*8.2mm$ Length: $0.5-10m$ Loop Resistance ( $20$ °C): $140 \Omega / KM$ Capacity: $42PF/M$ Characteristic Impedance (ZO): $100+5\Omega$ Delay Deviation: $4NS/100M$ Warranty: $1 Year$	Transmission Rate:	10Gbps
Crystal Head Shielding:MetalShielding:Aluminum FoilJacket Material:PVCAWG:30AWGWire Diameter:2.5mm*8.2mmLength:0.5–10mLoop Resistance (20°C):140 Ω / KMCapacity:42PF/MCharacteristic Impedance (ZO):100+5ΩDelay Deviation:4NS/100MWarranty:1 Year	Conductor:	Pure Copper
Shielding: Aluminum Foil  Jacket Material: PVC  AWG: 30AWG  Wire Diameter: 2.5mm*8.2mm  Length: 0.5–10m  Loop Resistance (20°C): $140 \Omega / KM$ Capacity: $42PF/M$ Characteristic Impedance (ZO): $100+5\Omega$ Delay Deviation: $4NS/100M$ Warranty: $1 Year$	Crystal Head :	POM
Jacket Material: PVC  AWG: 30AWG  Wire Diameter: 2.5mm*8.2mm  Length: 0.5–10m  Loop Resistance (20°C): $140 \Omega / KM$ Capacity: $42PF/M$ Characteristic Impedance (ZO): $100+5\Omega$ Delay Deviation: $4NS/100M$ Warranty: $1 Year$	Crystal Head Shielding:	Metal
AWG: 30AWG  Wire Diameter: 2.5mm*8.2mm  Length: 0.5–10m  Loop Resistance (20°C): 140 Ω / KM  Capacity: 42PF/M  Characteristic Impedance (ZO): 100+5Ω  Delay Deviation: 4NS/100M  Warranty: 1 Year	Shielding:	Aluminum Foil
Wire Diameter: $2.5 \text{mm*8.2mm}$ Length: $0.5-10 \text{m}$ Loop Resistance (20°C): $140 \Omega / \text{KM}$ Capacity: $42 \text{PF/M}$ Characteristic Impedance (ZO): $100+5\Omega$ Delay Deviation: $4 \text{NS}/100 \text{M}$ Warranty: $1 \text{ Year}$	Jacket Material:	PVC
Length: $0.5-10m$ Loop Resistance (20°C): $140 \Omega / KM$ Capacity: $42PF/M$ Characteristic Impedance (ZO): $100+5\Omega$ Delay Deviation: $4NS/100M$ Warranty: $1 Year$	AWG:	30AWG
Loop Resistance (20°C): $140 \Omega / KM$ Capacity: $42PF/M$ Characteristic Impedance (ZO): $100+5\Omega$ Delay Deviation: $4NS/100M$ Warranty: $1 Year$	Wire Diameter:	2.5mm*8.2mm
Capacity:42PF/MCharacteristic Impedance (ZO):100+5ΩDelay Deviation:4NS/100MWarranty:1 Year	Length:	0.5-10m
Characteristic Impedance (ZO): $100+5\Omega$ Delay Deviation: $4NS/100M$ Warranty: $1 \text{ Year}$	Loop Resistance (20°C):	140 Ω / KM
Delay Deviation: 4NS/100M Warranty: 1 Year	Capacity:	42PF/M
Warranty: 1 Year	Characteristic Impedance (ZO):	100+5Ω
	Delay Deviation:	4NS/100M
Packing: Color Box	Warranty:	1 Year
	Packing:	Color Box

PS: All data are from Vention laboratory



PS: Sizes above are hand measurement there migth be slight tolerance



Note: Packing difference exists for different meters or batches

Length	Art.No.	EAN Code
0.5m	ICBBD	6922794729728
1m	ICBBF	6922794729735
1.5m	ICBBG	6922794729742
2m	ICBBH	6922794729759
3m	ICBBI	6922794729766
5m	ICBBJ	6922794729773
8m	ICBBK	6922794729780
10m	ICBBL	6922794729797



## **Package Contents**

Cat 7 Patch Ethernet Extension Cable

## **Packaging Information**

Packing Dimension cm Packing Weight kg

Carton Dimension 48\*29\*30cm

Carton Qty 200pcs(0.5m), 160pcs(1m,1.5m), 140pcs(2m,3m), 90pcs(5m), 70pcs(8m),

60pcs(10m)

Carton Weight 10.3kgs(0.5m), 10.66kgs(1m), 11.3kgs(1.5m), 14.3kgs(2m), 17.4kgs(3m),

16.5kgs(5m), 19.08(8m), 19.63(10m) Package Color box

www.ventioncable.com

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Ethernet Cables / Networking Cables category:

Click to view products by Vention manufacturer:

Other Similar products are found below:

73-7797-25 MCJB2-10P6Q7-120 84909-0204 1200700174 1200860368 1410147 E16A06002M030 E200102-009-S1 AX105346-EW
MT14-187L 17-103530 190-038045-01 NK5EPC18RDY NK5EPC18VLY NK5EPC18YLY NK5EPC1GRY NK5EPC4Y NK5EPC6YLY
NK5EPC8BLY NK5EPC9YLY 1969343-6 C501100010 C501106002 C501106007 C501106015 C501106025 C601102010 C601104010
C601106007 C601106015 2142758-2 2168427-2 CAT1106007 21949-1 2J1866A RJF SFTP 5E 0500 AX100351 MN14CEC/ST
C501100015 C501106004 C501106010 C5F1108007 C601104004 C601106004 CA21106004 CA21106010 CA21109007 CA21109010
UTPCH14GYY 45-5684