

Data Sheet

Customer: _____

Product: Low Ohm (Metal Strip) Chip Resistor – LRP Series

Size: 1206 /2010/2512

Issued Date: 01-Sep-23

Edition: REV.B9



VIKING TECH CORPORATION
光頡科技股份有限公司

No.70 Guangfu N. Rd., Hukou
Township, Hsinchu County 303,
Taiwan

TEL:886-3-5972931
FAX:886-3-5972935•886-3-5973494
E-mail:sales@viking.com.tw

VIKING TECH CORPORATION KAOHSIUNG BRANCH
光頡科技股份有限公司高雄分公司

No.248-3, Sin-Sheng Rd., Cian-Jhen Dist., Kaohsiung,
806, Taiwan

TEL:886-7-8217999
FAX:886-7-8228229
E-mail:sales@viking.com.tw

VIKING ELECTRONICS (WUXI) CO., LTD.
光頡電子(無錫)有限公司

No.22 Xixia Road, Machinery & Industry Park,
National Hi-Tech Industrial Development Zone
of Wuxi, Wuxi, Jiangsu Province, China
Zip Code:214028

TEL:86-510-85203339
FAX:86-510-85203667•86-510-85203977
E-mail:china@viking.com.tw

Produced by (QC)	Checked (QC)	Approved by (QC)	Prepared by (Sales)	Accepted by (Customer)
01-Sep-23	01-Sep-23	01-Sep-23		
Alice Hsiao	Susan Huang	Susan Huang		

Low Ohm (Metal Strip) Chip Resistor- LRP Series

■ Features


- Low TCR down to ± 25 PPM/ $^{\circ}$ C
- Customized resistance available
- Low inductance < 5 nH
- AEC-Q200 Compliance
- Sulfur resistance unaffected by sulfur environments
- Lead-free and RoHS compliant



■ Applications

- NB (for Power Management)
- MB (for Power Management)
- SWPS (DC-DC Converter, Charger, Adaptor)
- Monitor (for Power Management)

■ Construction

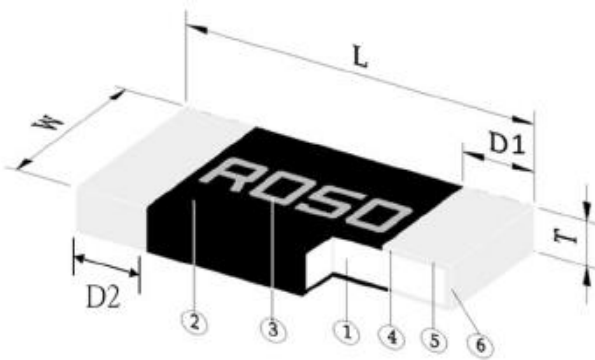

① Alloy Plate	④ Internal Electrode
② Overcoat	⑤ Barrier Layer
③ Marking	⑥ Solder Plating



■ Dimensions

Type	Size (Inch)	L (mm)	W (mm)	T (mm)	D1 (mm)	D2 (mm)	Weight (g) (1000pcs)
LRP06	1206	3.15 $\pm$ 0.10	1.45 $\pm$ 0.10	0.55 $\pm$ 0.10	0.55 $\pm$ 0.15	0.55 $\pm$ 0.15	10.5
LRP10	2010	5.00 $\pm$ 0.15	2.40 $\pm$ 0.15	0.55 $\pm$ 0.15	0.80 $\pm$ 0.20	0.80 $\pm$ 0.20	40
LRP12 (2~200m Ω)	2512	6.40 $\pm$ 0.25	3.20 $\pm$ 0.25	0.70 $\pm$ 0.20	0.90 $\pm$ 0.30	0.90 $\pm$ 0.30	52.6
LRP12 (1.5m Ω)	2512	6.40 $\pm$ 0.25	3.20 $\pm$ 0.25	0.70 $\pm$ 0.20	0.90 $\pm$ 0.30	1.45 $\pm$ 0.30	52.6
LRP12 (1m Ω)	2512	6.40 $\pm$ 0.25	3.20 $\pm$ 0.25	0.70 $\pm$ 0.20	0.90 $\pm$ 0.30	1.85 $\pm$ 0.30	52.6

■ Part Numbering

LRP	12	F	T	D	S	R015
Product Type	Dimensions (L×W)	Resistance Tolerance	Packaging Code	TCR (PPM/ $^{\circ}$ C)	Power Rating	Resistance
	06: 1206 10: 2010 12: 2512	D: $\pm$ 0.5% F: $\pm$ 1% J: $\pm$ 5%	T: Taping Reel	C: $\pm$ 25 D: $\pm$ 50 W: $\pm$ 75 E: $\pm$ 100	R: 3W S: 2W T: 1W	R015: 0.015 Ω R050: 0.05 Ω

Derating Curve

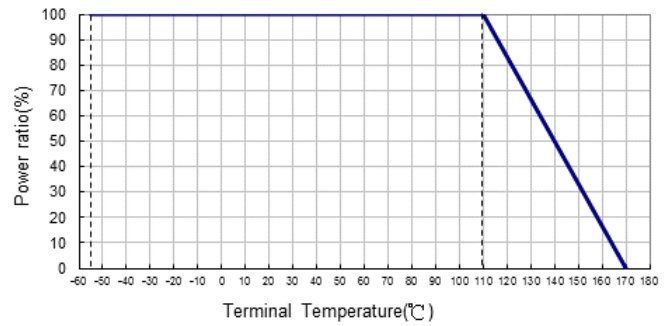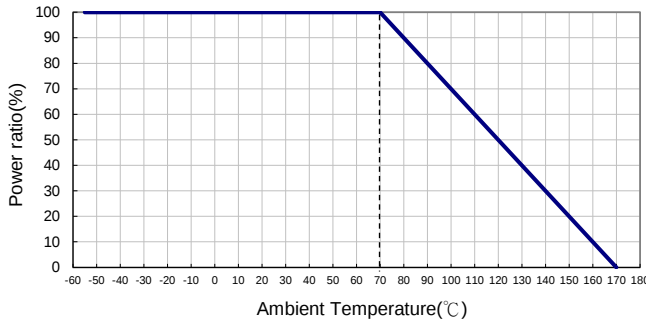


Electrical Specifications

Type \ Item	Power Rating at 70°C	Rated Terminal Temperature	Operating Temp. Range	Resistance Range (mΩ)			TCR (PPM/°C)
				±0.5%	±1%	±5%	
LRP06 (1206)	1W	110°C	-55 ~ +170°C	8, 10, 12, 15, 20, 25, 30, 33, 40			±50
				3, 4, 5, 7, 8, 10, 12, 15, 20, 25, 30, 33, 40			±75 ±100
LRP10 (2010)	1W	110°C	-55 ~ +170°C	4, 5, 10, 15, 20, 30, 50, 68, 75, 100			±75
	2W			4, 5, 10, 15, 20, 30, 50, 68, 75			
LRP12 (2512)	2W, 3W	110°C	-55 ~ +170°C	3, 4, 5, 6, 7, 18, 20, 22, 25, 30, 33, 35, 39, 40, 47, 50, 60, 68, 70, 75, 80, 82, 90, 91, 100, 120, 150, 180, 200			±25
		110°C		1, 1.5, 2, 2.5, 3, 4, 5, 6, 7, 8, 8.5, 9, 10, 12, 15, 18, 20, 22, 25, 30, 33, 35, 39, 40, 47, 50, 60, 68, 70, 75, 80, 82, 90, 91, 100, 120, 150, 180, 200			±50 ±75

Operating Current = $\sqrt{P/R}$, Operating Voltage = $\sqrt{P \cdot R}$

■ Viking is capable of manufacturing the optional spec based on customer's requirement.

Soldering Condition

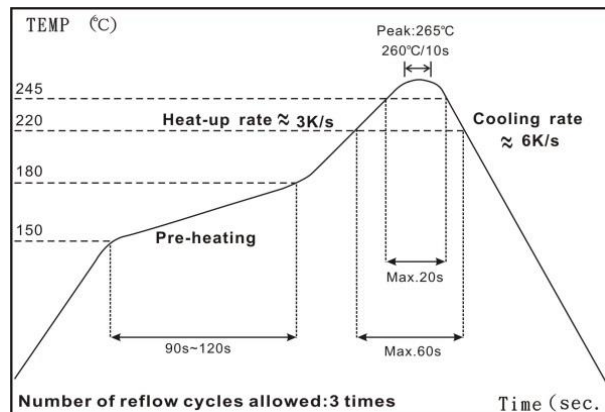

IR Reflow Soldering

(1) Time of IR reflow soldering at maximum temperature point 260°C : 10s

■Environmental Characteristics

Item	Requirement	Test Method
Temperature Coefficient of Resistance (T.C.R.)	As Spec.	IEC60115-1 4.8 JIS-C-5201-1 4.8 +25°C ~125°C, 25°C is the reference temperature
Short Time Overload	±1.0%	IEC60115-1 4.13 JIS-C-5201-1 4.13 5*rated power for 5 seconds
Insulation Resistance	≥10G	IEC60115-1 4.6 JIS-C-5201-1 4.13 100V DC for 1 minute
Endurance	±1.0%	IEC60115-1 4.25 JIS-C-5201-1 4.25.1 70±2°C, rated power for 1000 hrs with 1.5 hrs "ON" and 0.5 hr "OFF"
Biased Humidity	±1.0%	MIL-STD-202 Method 103 1000 hrs 85°C/85%RH 10% of operating power
Dry Heat	±1.0%	IEC60115-1 4.23.2 JIS-C-5201-1 4.23.2 at +170°C for 1000 hrs
Bending Strength	±1.0%	JIS-C-5201-1 4.33 IEC-60115-1 4.33 Bending width 2mm once for 60 seconds
Solderability	95% min. coverage	JIS-C-5201-1 4.17 IEC-60115-1 4.17 245±5°C for 3 seconds
Resistance to Soldering Heat	±0.5%	JIS-C-5201-1 4.18 IEC-60115-1 4.18 260±5°C for 10 seconds
Rapid Change of Temperature	±1.0%	JIS-C-5201-1 4.19 IEC-60115-1 4.19 -55°C to +155°C, 5 cycles
Low Temperature Storage	±1.0%	IEC60115-1 4.23.4 JIS-C-5201-1 4.23.4 at -55°C for 2 hrs

RCWV(Rated Continuous Working Voltage)= $\sqrt{P \cdot R}$ or Max. Operating Voltage whichever is lower.


■Storage Temperature: 15~28°C; Humidity < 80%RH

■Shelf Life: 2 years from production date.

Low Ohm (Metal Strip) Chip Resistor


■ Packaging

Reel Specifications & Packaging Quantity

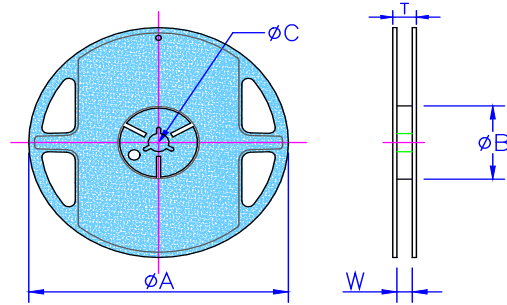


Type	Resistance (mΩ)	Packaging Quantity		Tape Width	Reel Diameter	ΦA (mm)	ΦB (mm)	ΦC (mm)	W (mm)	T (mm)
LRP06	3~40	Paper	5K	8mm	7 inch	178.5±1.5	60 ^{+1/-0}	13.0±0.2	9.0±0.5	12.5±0.5
LRP10	4~100	Embossed	4K	12mm	7 inch	178.5+/-1.5	60±1.0	13.0±0.5	13.0±1.0	15.5±0.5
LRP12	1~200	Embossed	4K	12mm	7 inch	178.5+/-1.5	60±1.0	13.0±0.5	13.0±1.0	15.5±0.5

Embossed Plastic Tape Specifications

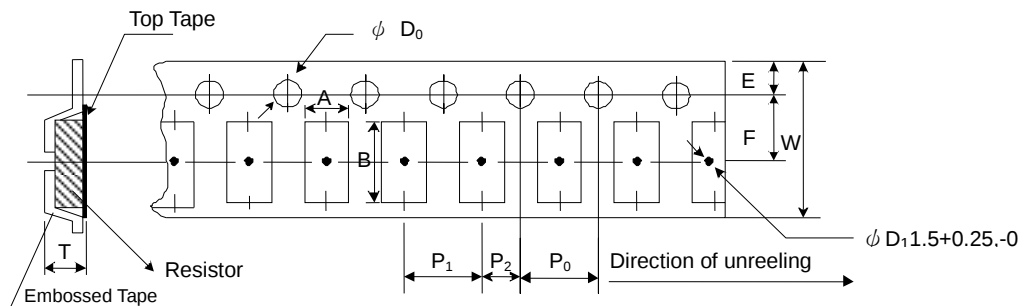


Type	A (mm)	B (mm)	W (mm)	E (mm)	F (mm)	P ₀ (mm)	P ₁ (mm)	P ₂ (mm)	ΦD ₀ (mm)	T (mm)
LRP10	2.80±0.10	5.40±0.20	12.0±0.30	1.75±0.10	5.5±0.05	4.00±0.10	4.00±0.10	2.00±0.05	1.50+0.1, -0	1.20+0
LRP12	3.50±0.10	6.70±0.10	12.0±0.30	1.75±0.10	5.5±0.05	4.00±0.10	4.00±0.10	2.00±0.05	1.50+0.1, -0	1.20+0

Paper Tape Specifications

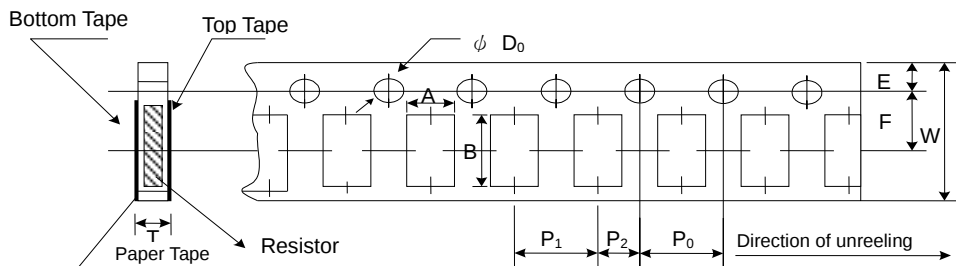

Type	A (mm)	B (mm)	W (mm)	E (mm)	F (mm)	P ₀ (mm)	P ₁ (mm)	P ₂ (mm)	ΦD ₀ (mm)	T (mm)
LRP06	1.90±0.10	3.50±0.20	8.0±0.20	1.75±0.10	3.50±0.05	4.00±0.10	4.00±0.05	2.00±0.05	1.50+0.1,-0	0.85±0.10

■ Recommend Land Pattern

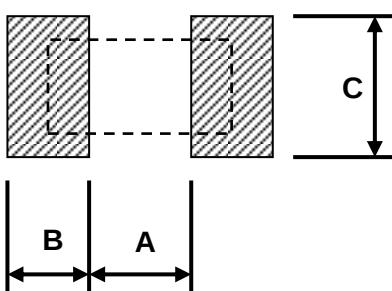

Type	A (mm)	B (mm)	C (mm)
LRP06	1.50	1.40	1.70
LRP10	3.60	1.40	2.50
LRP12 (2~200mΩ)	4.00	2.00	3.50
LRP12 (1~1.5mΩ)	2.30	2.65	3.50

* FR4 copper board, 100μm of copper pad thickness

REVISION HISTORY

REVISION	DATE	CHANGE NOTIFICATION	DESCRIPTION
Version A	Apr 30, 2015	-	- First issue of this specification
Version A1	Jul 30, 2015	-	- Add 0.5% Resistance Range
Version A2	Nov 27, 2015	-	- Change TCR75 ppm Resistance Range 10mR~100mR → 7mR~100mR
Version A3	Jul 15, 2016	-	- Remove Material Description - Modify Storage Temperature
Version A4	Jun 01, 2017	-	- Add 1206 Size Resistance Range - Add 2512 Size R003~R006 TCR75ppm
Version A5	Nov 02, 2017	-	- Features Item Add AEC-Q200 Compliance (LRP12 7mΩ to 100mΩ)
Version A6	Jan 12, 2018	-	- Environmental Characteristics update - Electrical Specifications update
Version A7	Aug 03, 2018	-	- Electrical Specifications update
Version A8	Oct 21, 2019	-	- Features: Add sulfur resistance instructions
Version A9	Mar 23, 2020	-	- Increase product weight
Version B	Jul 06, 2020	-	- Features Increase Low inductance < 5nH
Version B1	Nov 30, 2020	-	- Increase the resistance range of LRP06 - LRP12 add TCR: 25ppm & 50ppm specification
Version B2	Mar 10, 2021	-	- Features: Add Lead-free and RoHS compliant
Version B3	Jun 09, 2021	-	- Modify LRP06 Dimensions
Version B4	Jul 20, 2021	-	- Increase the resistance range of LRP10
Version B5	Nov 15, 2021	-	- Increase the shelf life description
Version B6	Feb 15, 2022	-	- Derating Curve changes the temperature range
Version B7	Mar 18, 2022	-	- Add Terminal Temperature Derating Curve - Add 2512 8.5mΩ
Version B8	Jan 06, 2023	-	- Modify 2512 3mΩ Packaging Quantity - Add 2010 Size Resistance Range
Version B9	Sep 01, 2023	-	- Add 2512 Size Resistance Range

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Thick Film Resistors - SMD](#) *category:*

Click to view products by [Viking](#) *manufacturer:*

Other Similar products are found below :

[M55342K08B46E4SWL](#) [M55342K08B62J0SUL](#) [M55342K08B6J20SWB](#) [MCR01MZPF1202](#) [MCR01MZPF1800](#) [MCR01MZPF6201](#)
[MCR01MZPJ121](#) [MCR01MZPJ751](#) [MCR03EZPFX2004](#) [MCR10EZPF1102](#) [RC1005F2052CS](#) [RC1005F471CS](#) [RC1005J122CS](#)
[RC1005J180CS](#) [RC1005J181CS](#) [RC1608F333CS](#) [RC1608J121CS](#) [RC2012F2493CS](#) [RC2012J105CS](#) [RC2012J470CS](#) [RC2012J561CS](#)
[RC2012J8R2CS](#) [RC3216F272CS](#) [RCP0603W100RGED](#) [RCWP1100100KFKS3](#) [RCWP110037R4FKED](#) [RCWP110043R2FKS3](#)
[RCWP72251K47FKWB](#) [RMCF0201FT49R9](#) [RMCF0603FT300K](#) [RMCF0805FT221K](#) [RMCF1210JT20R0](#) [RMCF1210JT68K0](#)
[RMCF1210ZT0R00](#) [RMCF2512FT1R00](#) [RMCF2512JT20R0](#) [RMCF2512JT7K50](#) [RMCF2512JT910R](#) [NRC04F1000TRF](#) [NRC04F1004TRF](#)
[NRC04F10R0TRF](#) [NRC04F1132TRF](#) [NRC04F2001TRF](#) [NRC04F2002TRF](#) [NRC04F2203TRF](#) [NRC04F3011TRF](#) [NRC04F33R0TRF](#)
[NRC04F51R1TRF](#) [NRC04J103TRF](#) [NRC04J204TRF](#)