
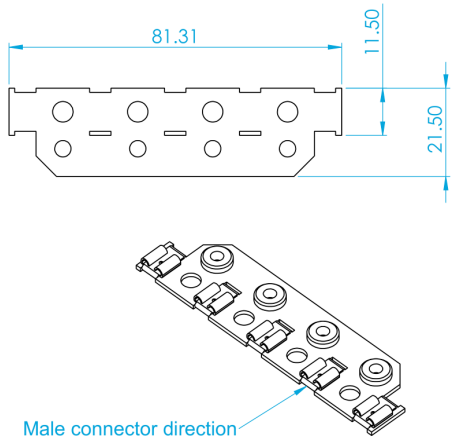
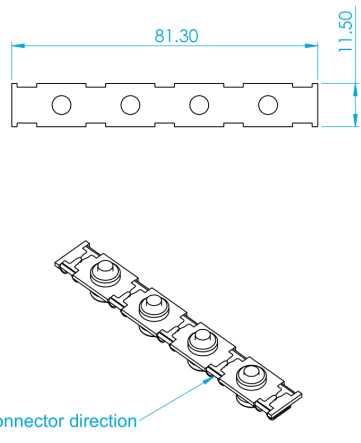
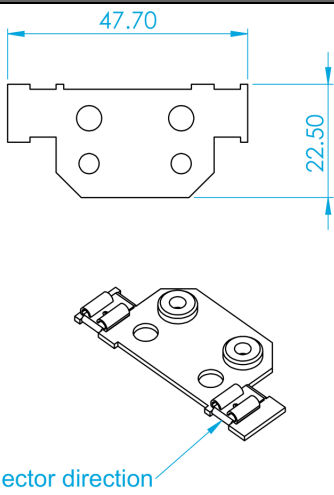
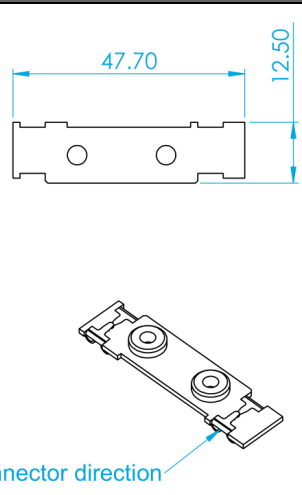
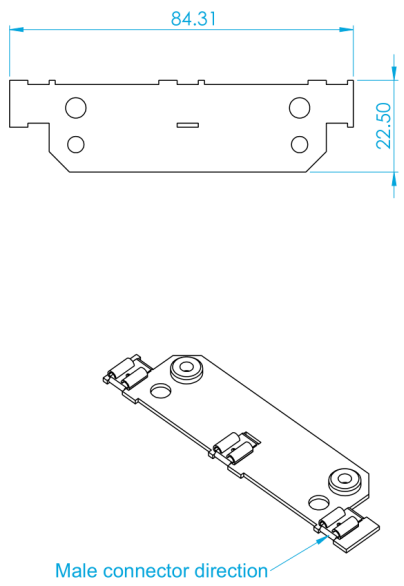
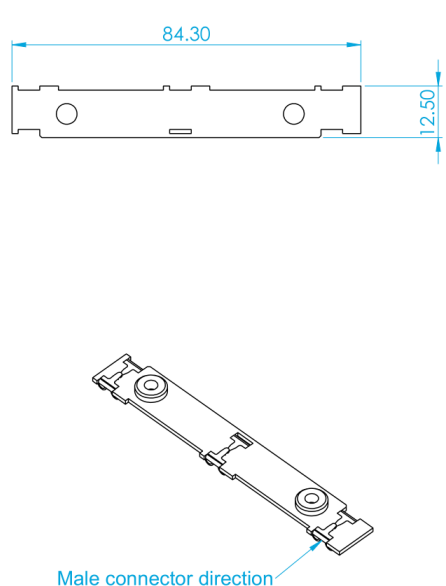
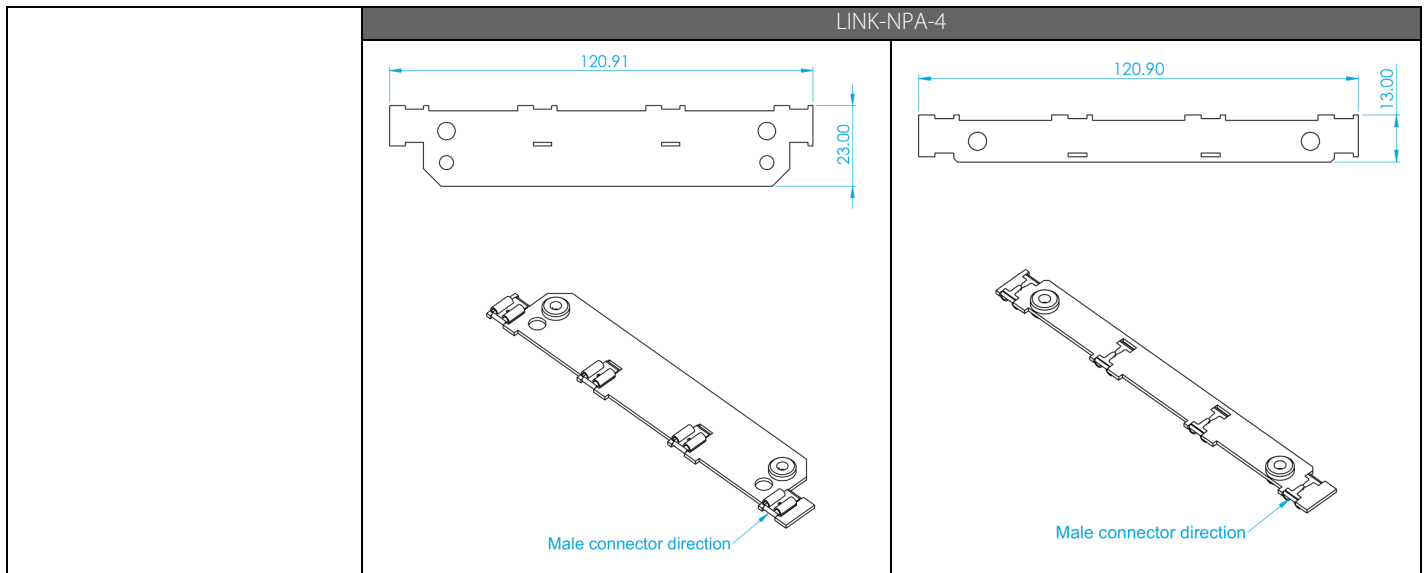
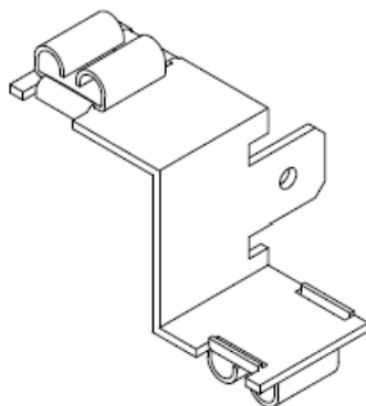
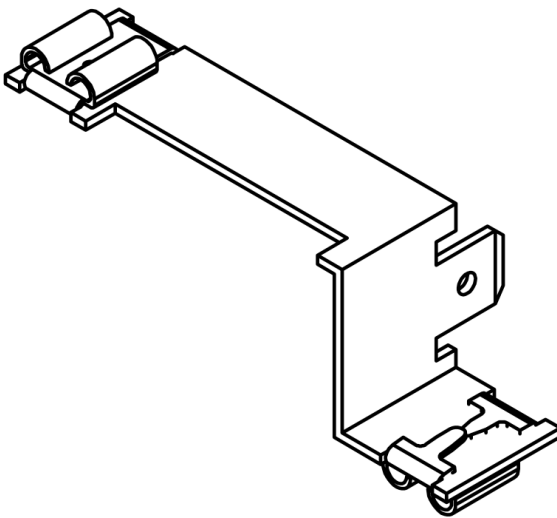



PARALLEL LINKS		
Specification	Negative Links	Positive Links
	LINK-NP4	
	LINK-NP3	
LINK-NP2		

LINK-NP5	
	
LINK-NPA-2	
	
LINK-NPA-3	
	

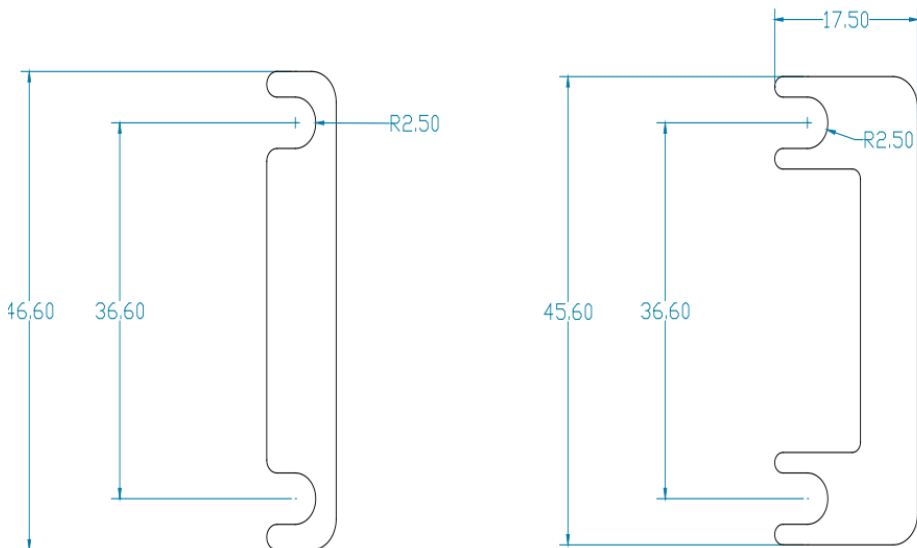

SERIES LINK	
Specification	LINK-NS
Friction Lock	
Protrude 11.50mm	
Centre Tap Point	
Specification	LINK-NSA
Friction Lock	
Protrude 11.50mm	
Off-Centre Tap Point – In-line with OP module PCB.	
Notes: Refer to the User Manual and datasheets for information on how to connect modules in parallel or in series.	

JUMPER LINK	
Specification	LINK-NJ
For linking Parallel links when connecting more than 4 modules in parallel	 Negative Jumper Positive Jumper
Notes: Refer to the User Manual and datasheets for information on how to connect modules in parallel or in series.	

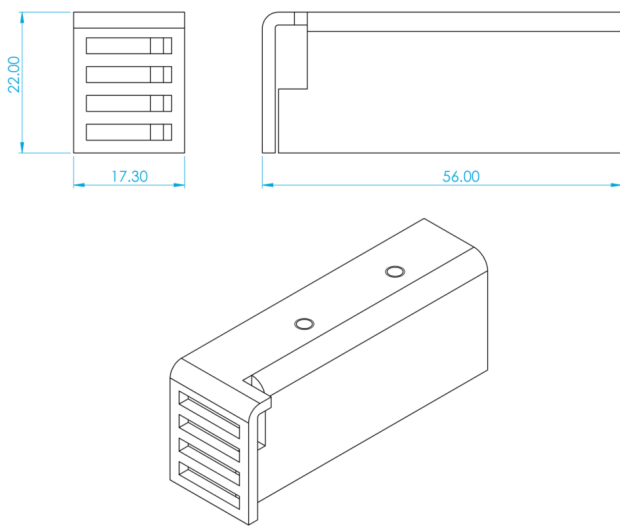BLANKING PLATE	
Specification	OP0
Fit to inside of lid of unit when configuring.	
Zero Protrusion from unit	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Modular Power Supplies – Accessories](#) ***category:***

Click to view products by [Vox Power](#) ***manufacturer:***

Other Similar products are found below :

[73-778-004](#) [73-778-008](#) [73-778-007](#) [73-778-009](#) [73-778-006](#) [LINK-VP3](#) [LINK-VP4](#) [LINK-VS](#) [ACC-VST](#) [LINK-NJ](#) [LINK-NP2](#) [LINK-NP3](#) [LINK-NP5](#) [LINK-NPA-2](#) [LINK-NPA-3](#) [LINK-NPA-4](#) [LINK-NSA](#)